


Eurodry

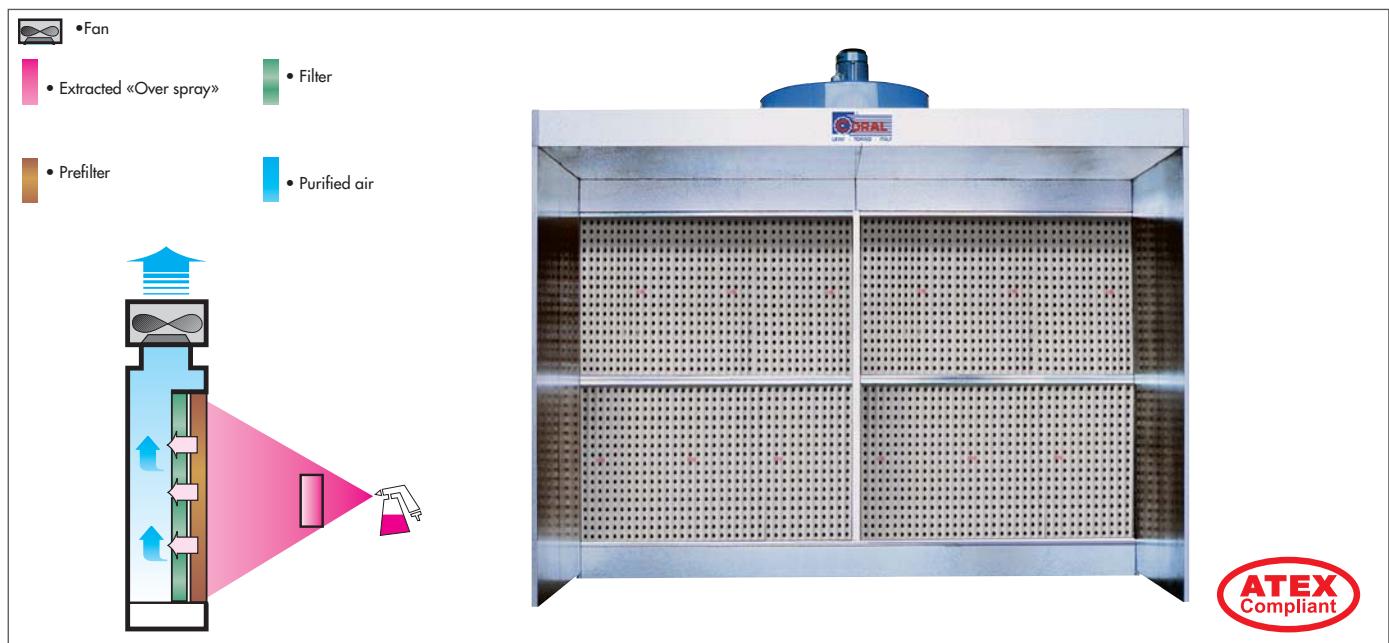

Valid for the same applications as the Tecnodry model. It is supplied with a double filter stage; thanks to its high-performance backward inclined sparkproof fan it uses less power and it is capable of optimizing extraction. Also available with extended walls and roof (version B), it is produced in two heights. Also available **ATEX COMPLIANT**.

ED 1,5 N	6000 - 3529	1	2/1,5	2939	1580	790/1790*	2186
ED 2 N	8000 - 4706	1	3/2,2	3009	2080	790/1790*	2186
ED 2,5 N	10000 - 5882	1	3/2,2	3009	2580	790/1790*	2186
ED 3 N	12000 - 7059	1	4/3	3056	3080	790/1790*	2186
ED 4 N	16000 - 9412	1	5,5/4	3056	4080	790/1790*	2186
ED 5 N	20000 - 11765	2	3/2,2	3009	5080	790/1790*	2186
ED 1,5 H	8500 - 5000	1	3/2,2	3943	1580	790/1790*	3120
ED 2 H	11500 - 6765	1	4/3	3990	2080	790/1790*	3120
ED 2,5 H	14000 - 8235	1	5,5/4	3990	2580	790/1790*	3120
ED 3 H	17000 - 10000	1	7,5/5,5	4101	3080	790/1790*	3120
ED 4 H	22500 - 13235	2	3/2,2	3943	4080	790/1790*	3120
ED 5 H	28000 - 16471	2	5,5/4	3990	5080	790/1790*	3120

m³/h - c.f.m
Delivery n°
Fan Hp/Kw
mm
Total height mm
Width mm
Depth mm
Working height

DRY BOOTHS



Theory of operation

By means of the centrifugal fan mounted on the roof of the booth, a depression is created, forcing air to circulate through the filters. This flow conveys the particles of paint suspended in the air to the filters without any dispersion in the environment. The first stage of filtration blocks the larger particles of paint and the second, made of glass fibre, blocks the finer particles; the air purified of solid pigments is expelled by the fan.

Description:

The CORAL dry painting booths are designed to ensure versatility, modularity and efficiency. They consist entirely of zinc-plated panels bolted together: the side panels and dividers are self-supported. The extracting front has filter holding grooves set for housing a double filtering stage. On the roof there is a spark proof centrifugal fan; the range includes widths of 1 - 1.5, 2, 2.5, 3, 4, 5 and 6 metres in two design heights, with the possibility of having single extracting walls (version A) or side walls with an extended roof (version B).



Accessories & spares

1. Differential manometer - 2. Clean Carbo and Karb active carbon postfilters - 3. Watertight (standard) or flameproof (ADPE) (optional) lamp -
4. Thermal switch or control panel - 5. ATEX Explosionproof motor. - 7. Floor stand or wall holding device for spray gun with automatic fan switch on-off- 8. Filter paper, 10mts - 9. Exhausting and recycling pipes - 10. Filters in fiber-glass for double filtration with metal or cardboard frame.

