


Mod. PR

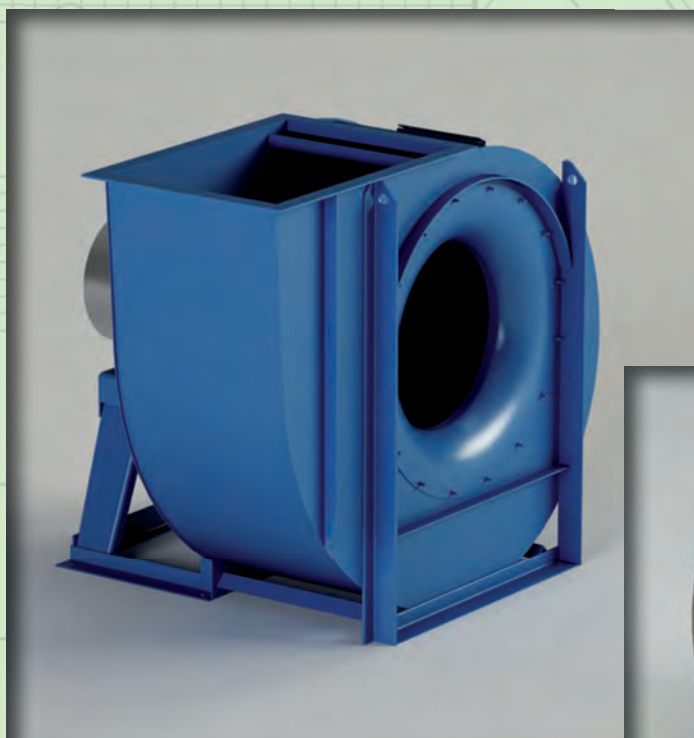

$Q = 1000 \div 270000 \text{ m}^3/\text{h}$

$Q = 0.3 \div 75 \text{ m}^3/\text{s}$

$p_t = 20 \div 460 \text{ mmH}_2\text{O}$

$p_t = 200 \div 4500 \text{ Pa}$



Field of operation

Medium-high flow rates. Low pressures.

Blade type

Curve, backward (negative), see pg. 2.2.

Applications

For the inlet of clean and slightly dusty air, for applications in industrial installations and civil and industrial air-conditioning systems.

Standard constructional arrangements

Arr.1-Arr.4-Arr.5-Arr.8-Arr.9-Arr.12, see pgs. 2.5 - 2.6.

Standard fluid temperatures

-10÷+60°C. For other temperatures see pgs. 1.12 to 1.15.

Type of construction

Fan in Fe360 plate, impeller in Fe360 statically and dynamically balanced. For other materials see pgs. 1.12 to 1.15.

Operating specifications

Condition of inlet air T=20°C, 0 m above sea level and $\rho=1.205 \text{ kg/m}^3$.

Noise level

Expressed as sound power L_w [dB(A)] measured in free field with ducted fan, see pgs. 1.43 to 1.49.

Orientations

No.8 RD (clockwise viewed from transmission side) and No.8 LG. Fan in bolted orientable version for sizes 250-630, fixed orientation for sizes 700-2000. See pg. 2.7.

Special applications

See pgs. 2.20 to 2.34.

Impeller classes


The above table refers to standard operating conditions, in heavy-duty service conditions it is advisable to contact the CORAL Customer Service to establish the most suitable type of impeller.

• Values valid up to 60°C

GRANDEZZA VENTILATORE • Size	• Max rpm		
	CLASSE I	CLASSE II	CLASSE III
PR250	4000	5000	6000
PR280	3800	4500	5300
PR320	3600	4100	4750
PR360	3250	3700	4250
PR400/R	2950	3300	3900
PR400	2950	3300	3900
PR450/R	2750	3150	3800
PR450	2550	2955	3550
PR500/R	2350	2750	3350
PR500	2250	2600	3150
PR560/R	2100	2450	3000
PR560	2000	2300	2850
PR630/R	1850	2150	2650
PR630	1750	2050	2500
PR700/R	1900	2300	2550
PR700	1800	2200	2400
PR800/R	1700	2050	2300
PR800	1600	1950	2150
PR900/R	1500	1850	2000
PR900	1450	1750	1900
PR1000/R	1350	1650	1800
PR1000	1250	1550	1700
PR1100/R	1250	1350	1450
PR1100	1200	1300	1400
PR1250/R	1150	1250	1350
PR1250	1100	1200	1300
PR1400/R	1050	1150	1250
PR1400	1000	1100	1200
PR1600	900	1000	1100
PR1800	800	900	1000
PR2000	700	800	900

• between	60°C	• and	100°C	• degrade speed	4%
	100°C		150°C		10%
	150°C		200°C		16%
	200°C		250°C		23%
	250°C		300°C		30%
	300°C		350°C		37%
	350°C		400°C		45%
	400°C		450°C		54%
	450°C		500°C		64%

pt [mmH₂O]

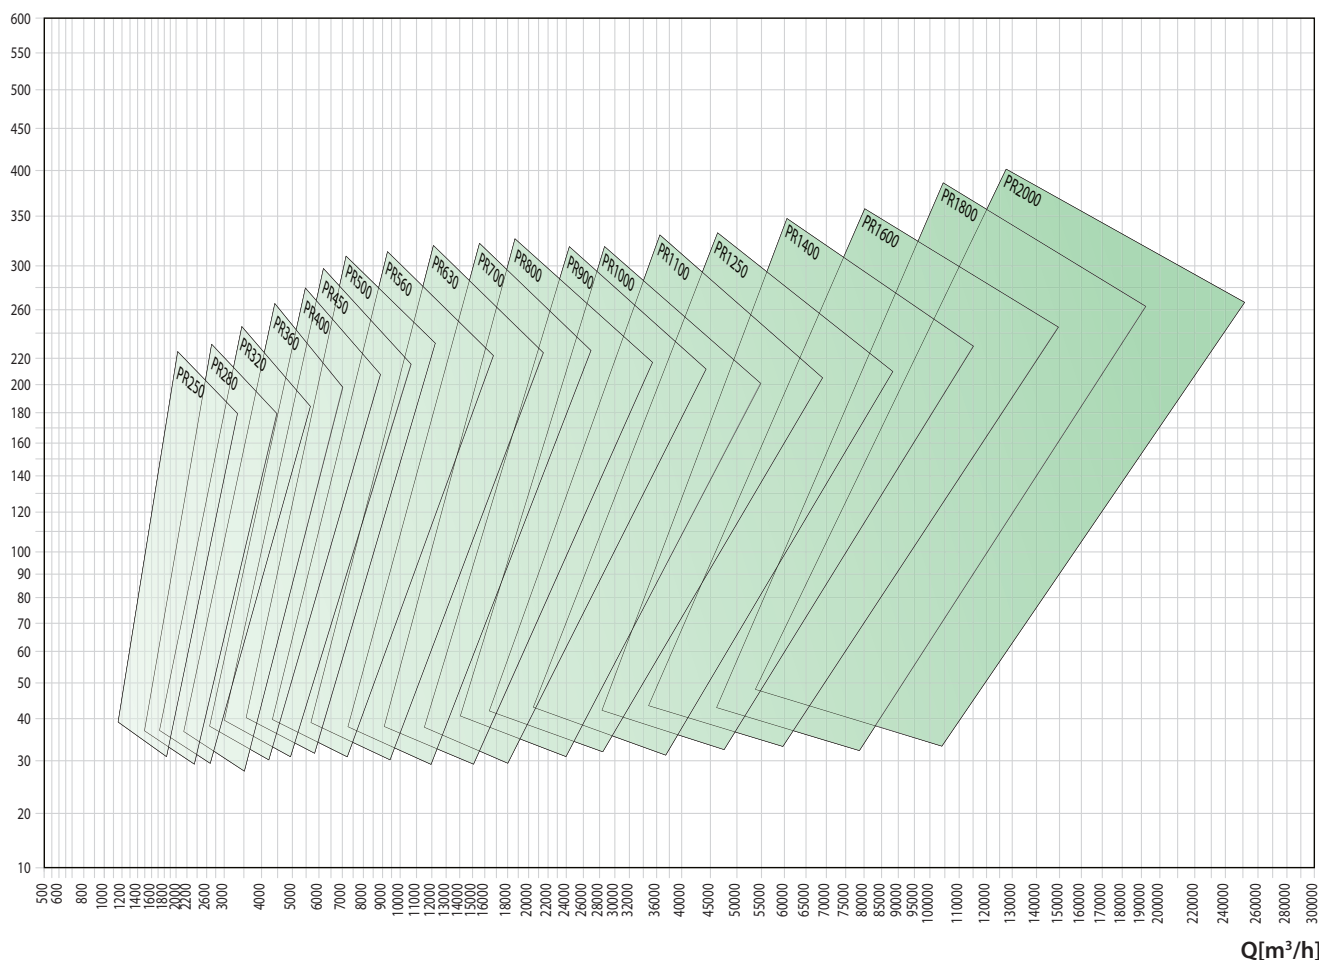



PR

Type		P inst. [kW]	n	LpA [dB(A)]	• Load tolerance $\pm 5\%$																				
Fan	Motor				Q [m³/h]																				
					1080	1225	1370	1440	1620	1800	2160	2520	2880	3240	3600	3960	4320	4680	5400	6120	7200	7920			
					pt[mmH ₂ O]																				
PR250/2	71	0,55	2850	63	87	84	80	78	73	67	53	35													
PR280/2	80	1,1	2850	66			108	107	105	102	94	84	73	62	51										
PR320/2	90	2,2	2880	67						145	141	135	128	120	111	101	92	81	66						
PR360/2	100	3	2890	72									178	174	170	164	158	151	135	118	93				
PR400/2R	112	4	2950	70											213	210	206	201	190	175					
PR400/2	132	5,5	2950	76												237	234	231	222	212	192	176			
PR450/2R	132	7,5	2950	79															265	254	236	223			
PR450/2	160	11	2955	82															317	310	297	287			
PR500/2R	160	15	2960	80																	342	335			
PR500/2	160	18,5	2960	82																		382			
PR320/4	63	0,18	1350	52	31	30	28	27	25	23	19	14													
PR360/4	71	0,37	1370	57			40	39	38	37	35	31	27	22	18										
PR400/4R	80	0,55	1395	59						46	44	41	38	34	30	25									
PR400/4	80	0,75	1400	60						48	46	43	40	36	32	27	22								
PR450/4R	80	0,75	1400	59								60	58	55	52	48	45	41							
PR450/4	90	1,1	1415	60								72	71	69	67	65	62	59	52						
PR500/4R	90	1,5	1420	67											78	76	74	72	66	61	54	47			
PR500/4	100	2,2	1440	69												90	89	87	83	78	72	65			
PR560/4R	100	3	1440	70															100	97	91	85			
PR560/4	112	4	1450	72																114	110	106			
PR630/4R	132	5,5	1455	73																		129			
PR630/4	132	7,5	1455	73																		145			
PR700/4R	160	11	1460	74																					
PR700/4	160	15	1460	78																					
PR800/4R	180	18,5	1460	79																					
PR800/4	180	22	1460	75																					
PR900/4R	225	37	1470	81																					
PR900/4	225	45	1470	82																					
PR1000/4R	250	55	1475	77																					
PR1000/4	280	75	1480	85																					
PR500/6R	80	0,37	930	50						35	33	32	30	28											
PR500/6	80	0,55	930	56							38	37	35	34	33	31	30	25	21						
PR560/6R	90	0,75	930	60									42	41	40	39	38	34	30	23	18				
PR560/6	90	1,1	930	61										47	47	46	45	42	39	33	30				
PR630/6R	100	1,5	940	63												56	55	54	51	47	46				
PR630/6	112	2,2	950	64													63	62	60	58	56				
PR700/6R	132	3	950	64																73	72	71			
PR700/6	132	4	960	68																	84	83			
PR800/6R	132	5,5	960	70																					
PR800/6	160	7,5	960	71																					
PR900/6R	160	11	970	73																					
PR900/6	180	15	970	74																					
PR1000/6R	200	18,5	975	75																					
PR1000/6	200	22	975	76																					
PR1100/6R	225	30	975	78																					
PR1100/6	250	37	980	78																					
PR1250/6R	280	55	985	81																					
PR1250/6	315	75	985	82																					
PR1400/6R	315	90	985	82																					
PR1400/6	315	110	985	84																					

• Noise tolerance $\pm 4\text{dB(A)}$


Q [m³/h]																								
9000	10080	10800	12600	14400	16200	18000	19800	21600	25200	28800	32400	36000	39600	43200	46800	54000	61200	68400	75600	86400	97200	108000	122400	140000
pt[mmH ₂ O]																								
151	123																							
202	178	161	114																					
270	251	238	201	159	113																			
322	309	300	273	243	209	172																		
373	362	353	331	307	279	248	214	177																
36																								
54	48	38																						
76	66	58	41																					
99	91	85	68	51	35																			
125	121	117	107	95	82	67	52																	
142	139	136	128	118	107	94	81	67																
	171	170	165	157	148	138	125	112	82															
		194	191	187	181	172	164	153	129	102	72													
				236	234	230	225	217	199	176	149	121	91											
					254	253	249	244	230	211	189	164												
								304	300	291	277	260	241	218	195	144								
								326	325	319	309	296	280	261	240	194	144							
										373	370	363	354	341	327	292								
										409	408	405	400	391	381	353	319	279	236	174				
23																								
41	36	32	23																					
52	48	45	37	25																				
68	64	61	55	46	37																			
82	80	77	73	66	58	50	39	33																
102	101	100	98	94	87	81	74	62	44															
	110	109	108	105	102	95	88	81	62	44														
			133	132	131	128	125	120	110	97	82	58												
				143	142	141	137	135	124	110	99	85	67											
					164	163	162	157	149	138	124	121	95	89										
						177	177	174	170	164	152	141	128	116	86									
								199	197	193	187	179	170	159	135	108	80							
									225	224	221	216	210	203	184	162	137	110						
											255	255	252	248	236	220	201	179	143	104				
												283	282	280	274	263	249	231	201	167	131			
															313	308	299	287	264	237	206	161		
															355	354	350	344	329	310	286	250	199	

■ The A-weighted sound power level, L_{pA} (Chap.14), is the value measured in test conditions at the point of maximum noise level.


Type		P inst. [kW]	n	LpA [dB(A)]	• Load tolerance $\pm 5\%$																				
Fan	Motor				Q [m³/h]																				
					1080	1225	1370	1440	1620	1800	2160	2520	2880	3240	3600	3960	4320	4680	5400	6120	7200	7920			
					pt[mmH ₂ O]																				
PR250/2	71	0,55	2850	63	86	83	79	77	72	66	52	33													
PR280/2	80	1,1	2850	66			107	106	103	100	92	82	71	60	48										
PR320/2	90	2,2	2880	67						143	139	133	125	117	108	98	89	78	62						
PR360/2	100	3	2890	72									174	170	166	160	154	147	131	113	87				
PR400/2R	112	4	2950	70											208	205	201	196	185	170					
PR400/2	132	5,5	2950	76												231	228	225	216	206	186	170			
PR450/2R	132	7,5	2950	79															257	247	229	216			
PR450/2	160	11	2955	82															307	300	287	277			
PR500/2R	160	15	2960	80																	330	324			
PR500/2	160	18,5	2960	82																		368			
PR320/4	63	0,18	1350	52	31	30	28	27	25	23	18	13													
PR360/4	71	0,37	1370	57			40	39	38	37	34	30	26	21	17										
PR400/4R	80	0,55	1395	59						46	44	40	37	33	29	24									
PR400/4	80	0,75	1400	60						48	46	42	39	35	31	26	21								
PR450/4R	80	0,75	1400	59								59	57	54	51	47	44	40							
PR450/4	90	1,1	1415	60								71	70	68	66	64	61	58	51						
PR500/4R	90	1,5	1420	67											77	75	73	71	65	60	53	45			
PR500/4	100	2,2	1440	69												89	88	86	82	77	70	63			
PR560/4R	100	3	1440	70															99	96	90	83			
PR560/4	112	4	1450	72																112	108	104			
PR630/4R	132	5,5	1455	73																		127			
PR630/4	132	7,5	1455	73																		142			
PR700/4R	160	11	1460	74																					
PR700/4	160	15	1460	78																					
PR800/4R	180	18,5	1460	79																					
PR800/4	180	22	1460	75																					
PR900/4R	225	37	1470	81																					
PR900/4	225	45	1470	82																					
PR1000/4R	250	55	1475	77																					
PR1000/4	280	75	1480	85																					
PR500/6R	80	0,37	930	50						35	33	32	30	28											
PR500/6	80	0,55	930	56							38	37	35	34	33	30	29	24	20						
PR560/6R	90	0,75	930	60									42	41	40	39	38	33	29	22	17				
PR560/6	90	1,1	930	61										47	47	46	45	41	38	32	29				
PR630/6R	100	1,5	940	63												56	55	53	50	46	45				
PR630/6	112	2,2	950	64													62	61	59	57	55				
PR700/6R	132	3	950	64																72	71	70			
PR700/6	132	4	960	68																	83	82			
PR800/6R	132	5,5	960	70																					
PR800/6	160	7,5	960	71																					
PR900/6R	160	11	970	73																					
PR900/6	180	15	970	74																					
PR1000/6R	200	18,5	975	75																					
PR1000/6	200	22	975	76																					
PR1100/6R	225	30	975	78																					
PR1100/6	250	37	980	78																					
PR1250/6R	280	55	985	81																					
PR1250/6	315	75	985	82																					
PR1400/6R	315	90	985	82																					
PR1400/6	315	110	985	84																					

PR


■ The A-weighted sound power level, L_{pA} (Chap.14), is the value measured in test conditions at the point of maximum noise level.

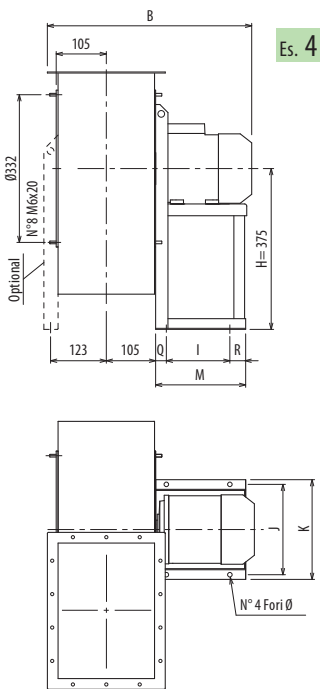

Es. 4

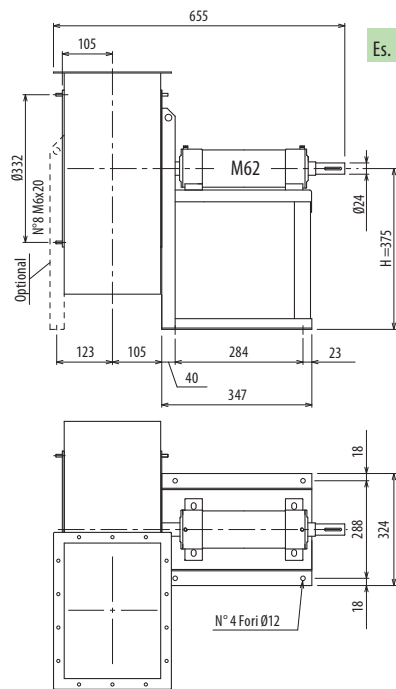



Es. 1

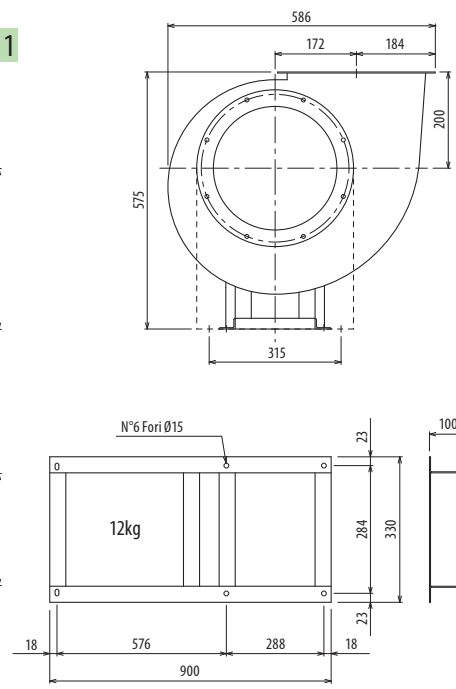


The fan is revolvable - The weight indicated in the table includes motor

TIPO • Type		PESO Weight	PD ²	B	I	H	H1	H2	J	K	M	Q	R	Ø
VENTILATORE Fan	MOTORE Motor	Kg	Kgf x m ²											
PR280/2	80 B2	45	0,20	482	121	375	200	375	203	225	217	48	48	10
PR280/T		46	0,22			375	200	375						


Further information and sizes

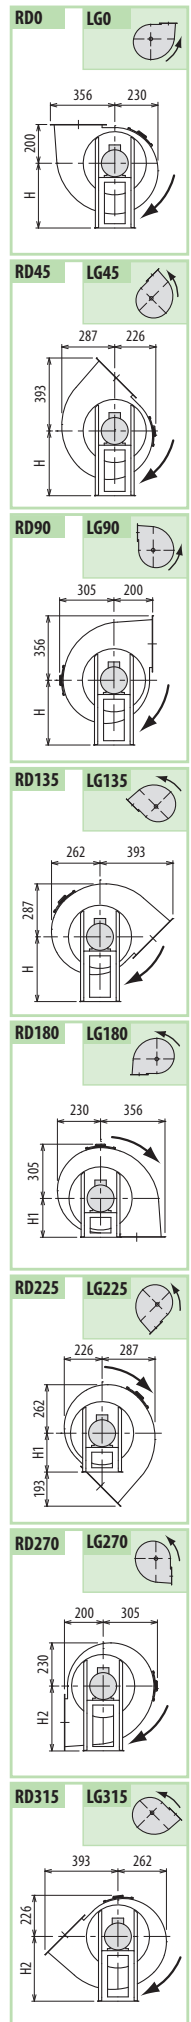


PR

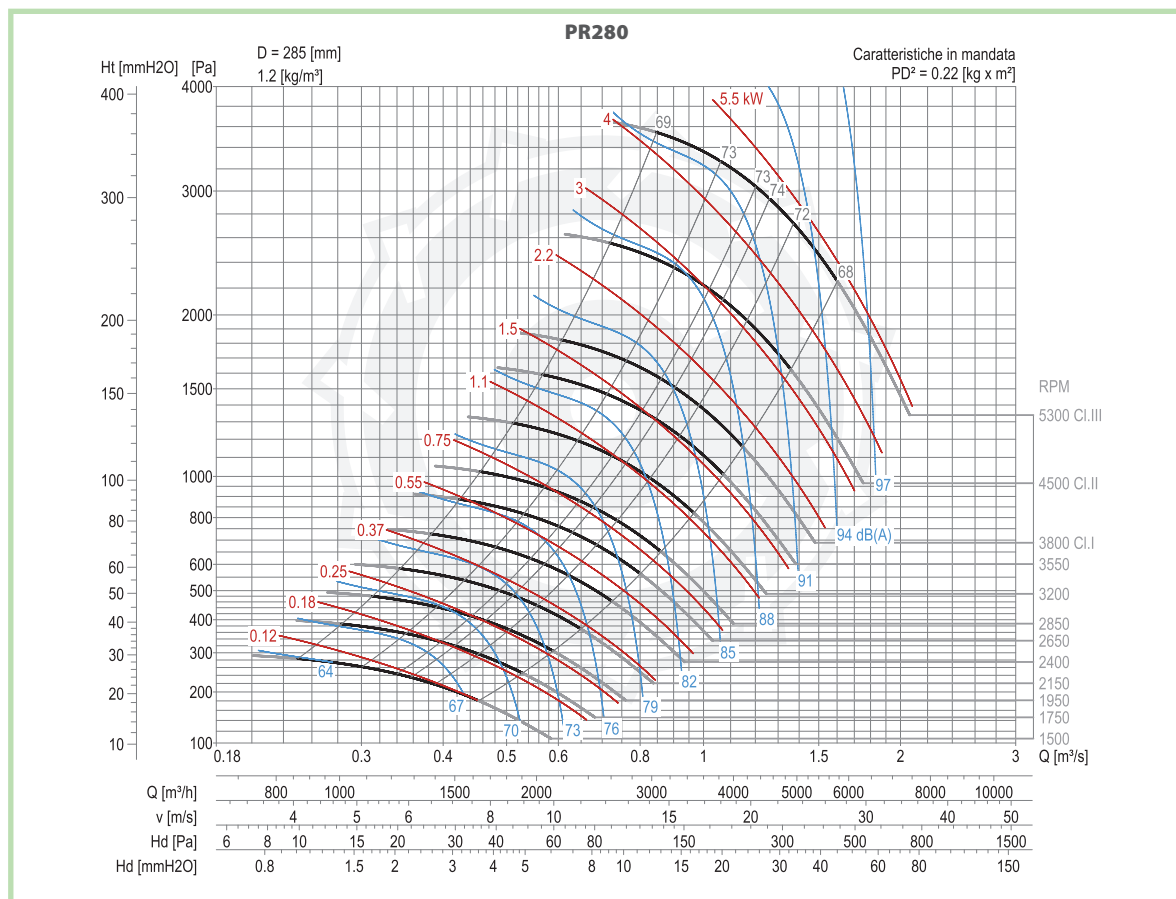


PR

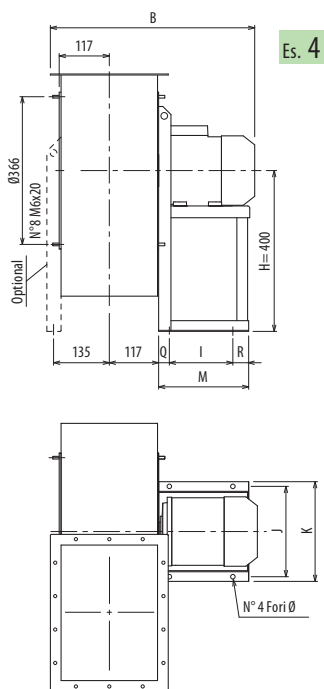

Es. 4

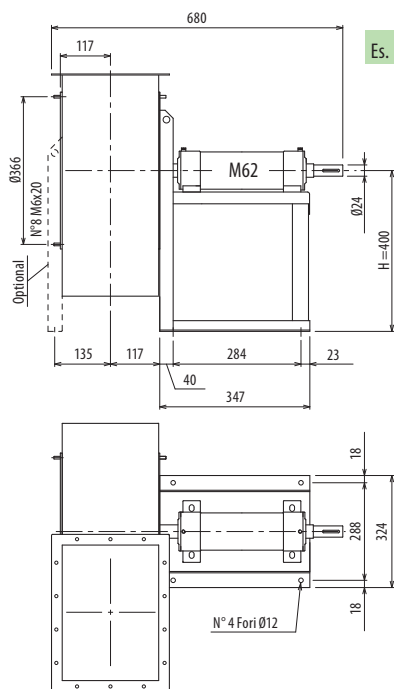




Es. 1

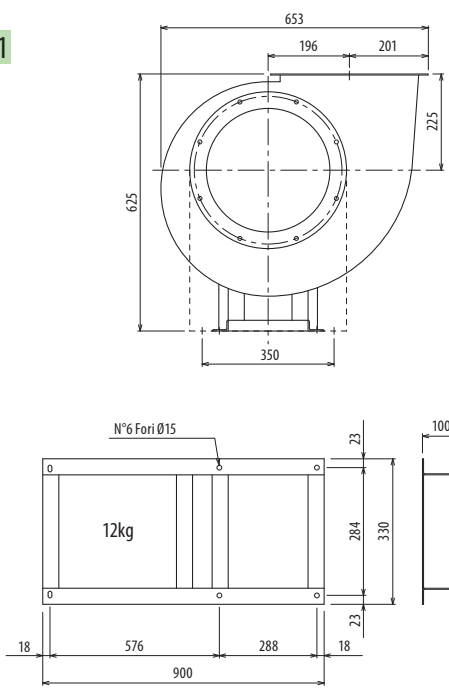


The fan is revolvable - The weight indicated in the table includes motor


Type		Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	J	K	M	Q	R	Ø
Fan	Motor													
PR320/2	90 L2	57	0,33	553	133	400	225	400	234	260	251	58	60	10
PR320/4	63 B4	43	0,33	452	86	400	225	400	184	206	151	45	20	10
PR320/T		50	0,33			400	225	400						

Further information and sizes







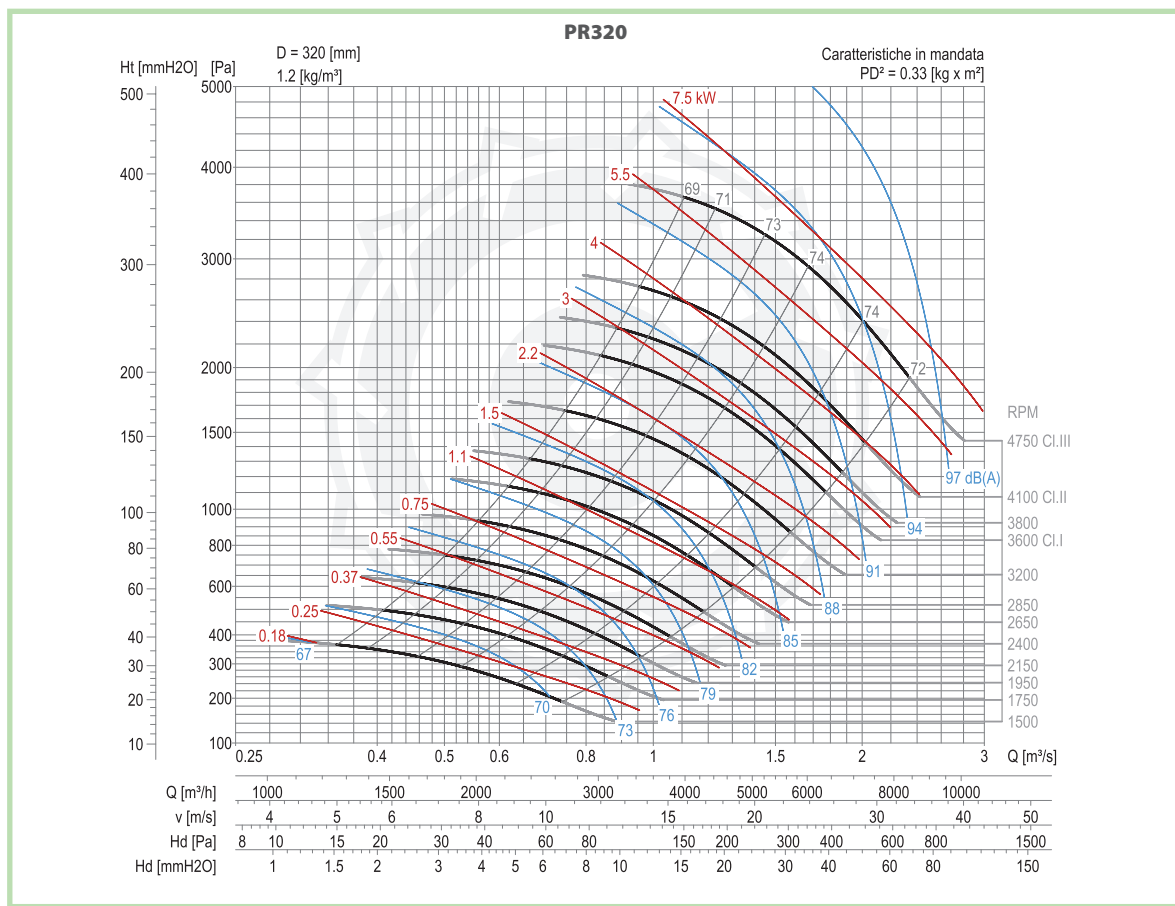
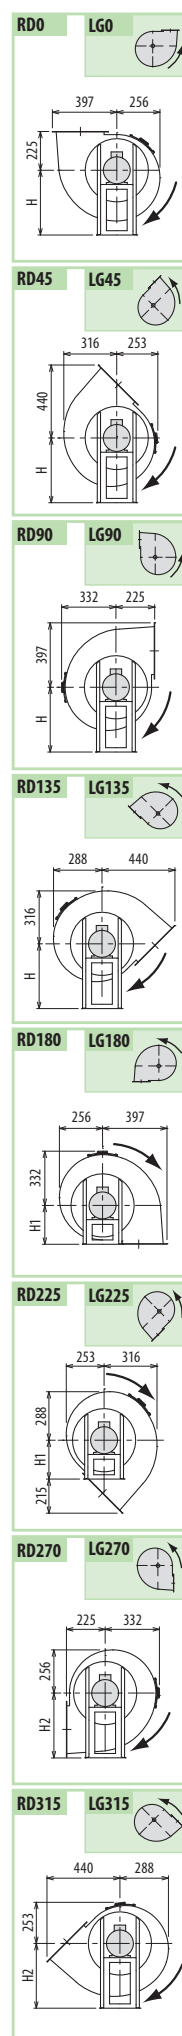



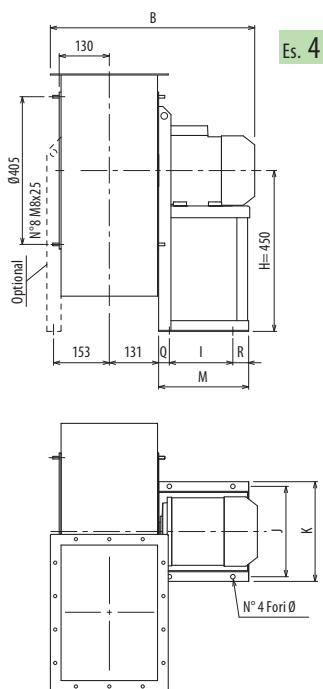

Es. 4

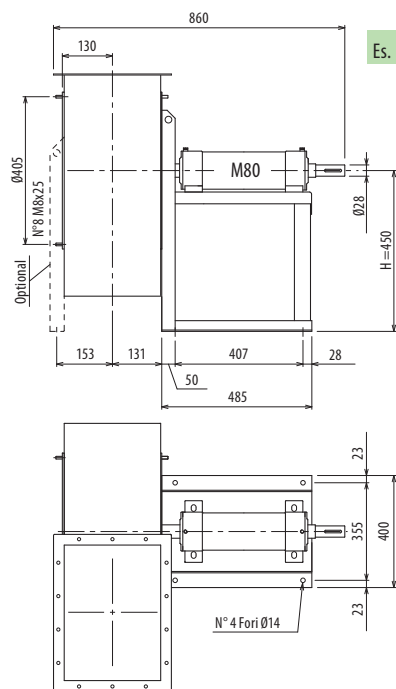



Es. 1

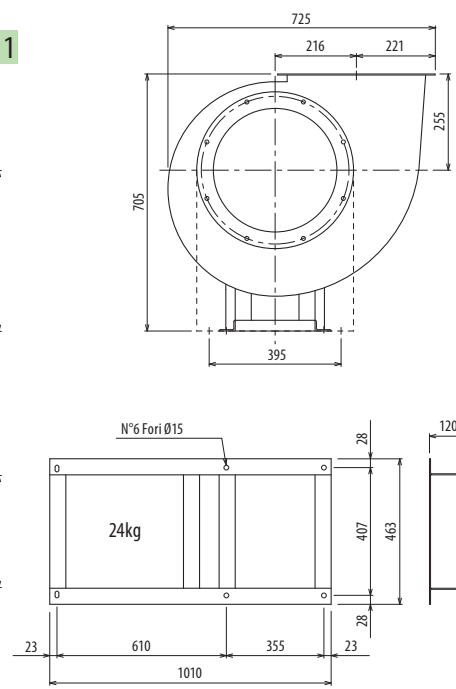


The fan is revolvable - The weight indicated in the table includes motor

Type		Weight	PD ²												
Fan	Motor	Kg	Kgf x m ²	B	I	H	H1	H2	J	K	M	Q	R	Ø	
PR360/2	100 L2	80	0,55	611	197	450	255	450	289	324	285	34	54	12	
PR360/4	71 B4	65	0,55	509	121	450	255	450	203	225	195	48	26	10	
PR360/T		76	0,55			450	255	450							


Further information and sizes

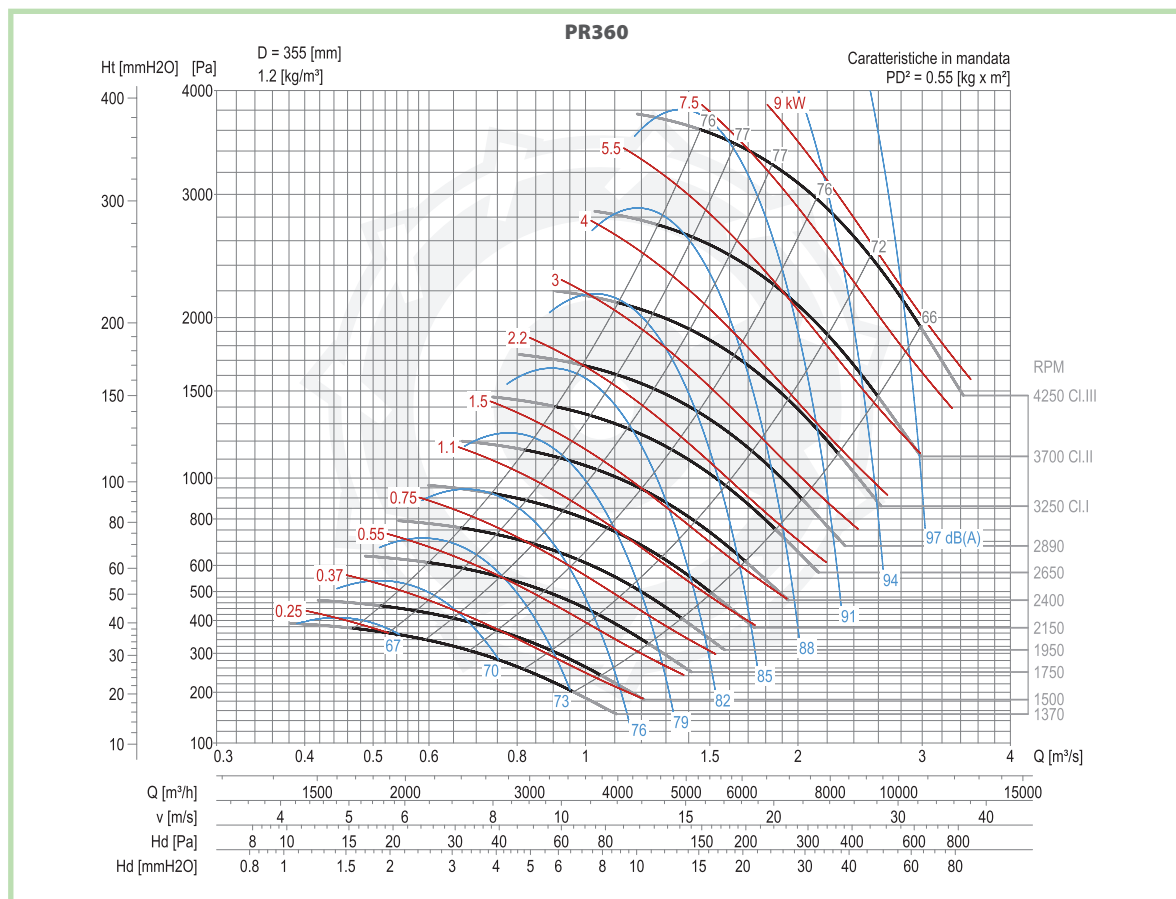


PR

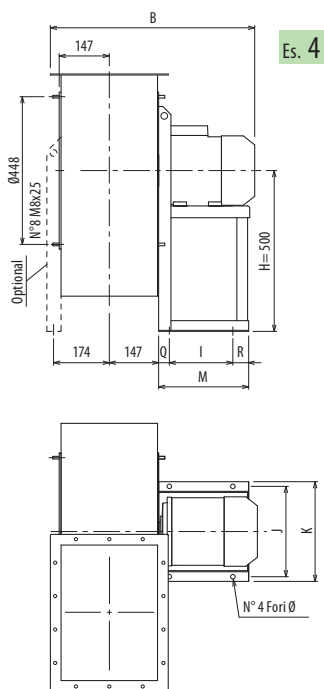

Es. 4

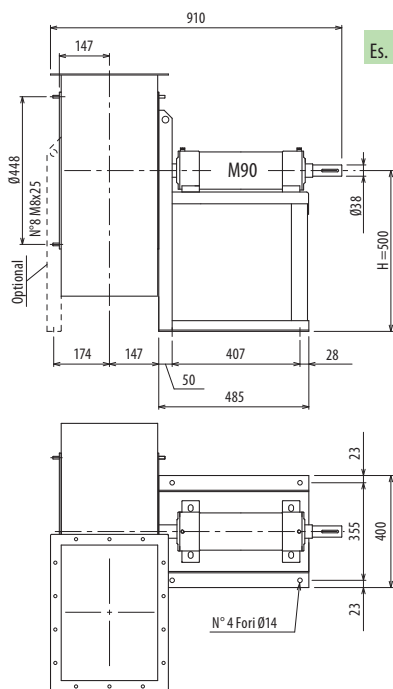




Es. 1










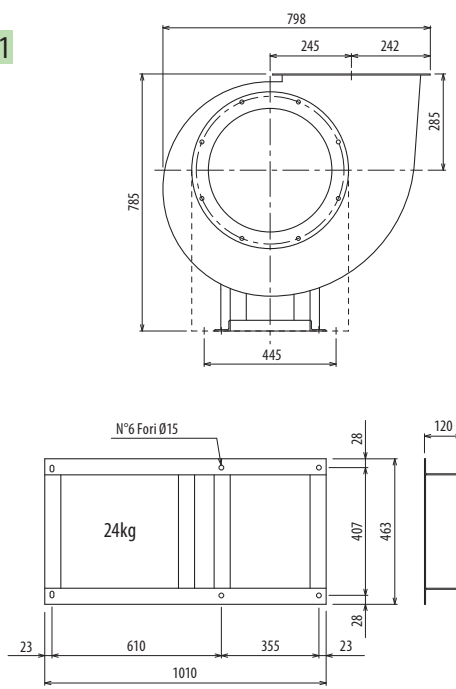


The fan is revolvable - The weight indicated in the table includes motor

Type		Weight	PD ²												
Fan	Motor	Kg	Kgf x m ²	B	I	H	H1	H2	J	K	M	Q	R	Ø	
PR400/2R	112 M2	95	0,82	664	197	500	285	500	289	324	285	34	54	12	
PR400/2	132 S2	116	1,10	710	237	500	285	500	337	372	345	44	64	12	
PR400/4R	80 A4	75	1,00	565	121	500	285	500	203	225	217	46	50	10	
PR400/4	80 B4	75	1,00	565	121	500	285	500	203	225	217	48	48	10	
PR400/T		92	1,1			500	285	500							

Further information and sizes

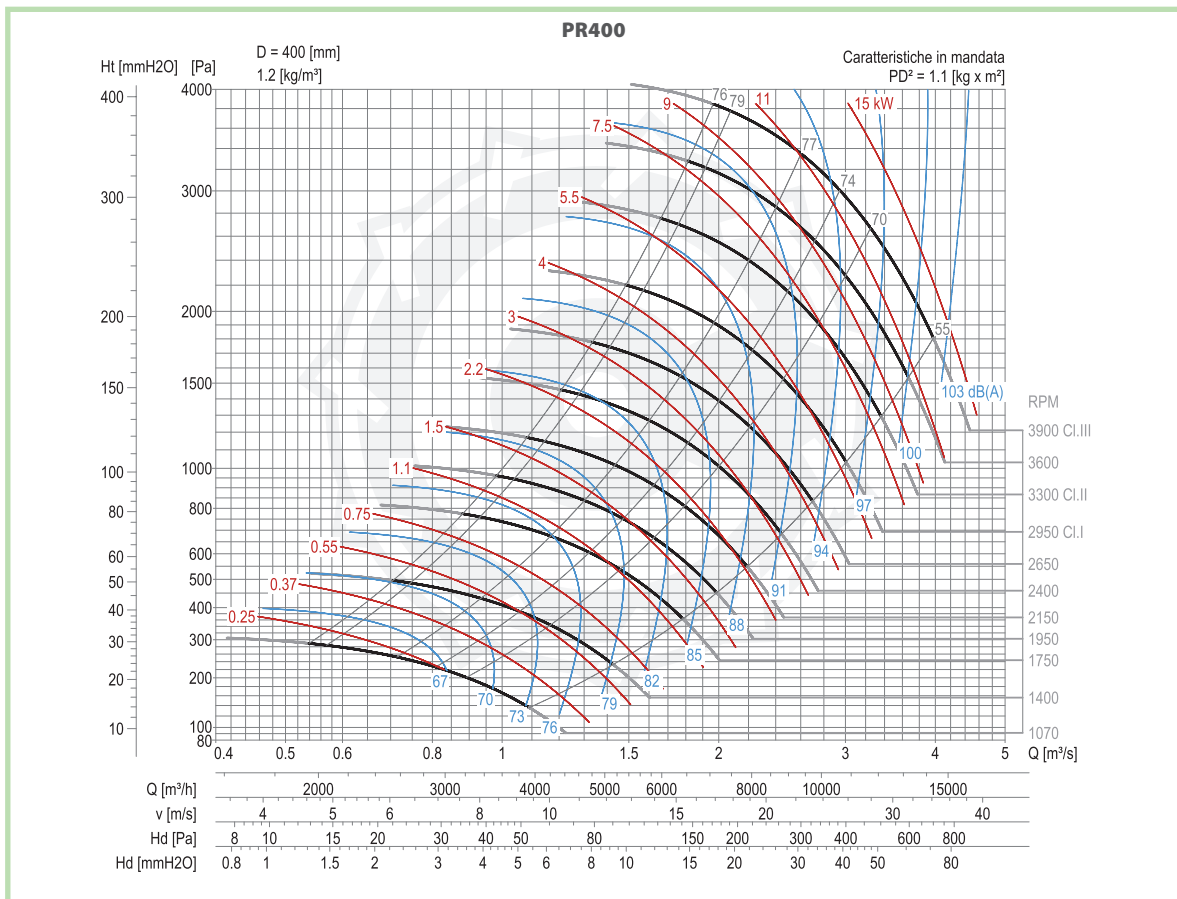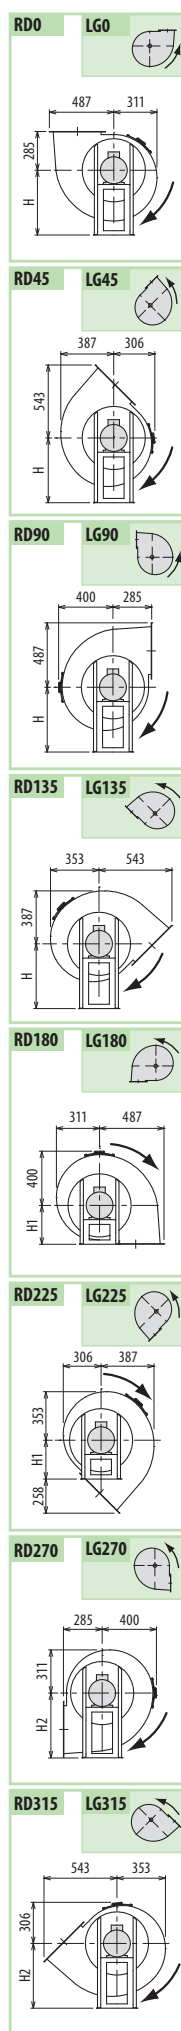



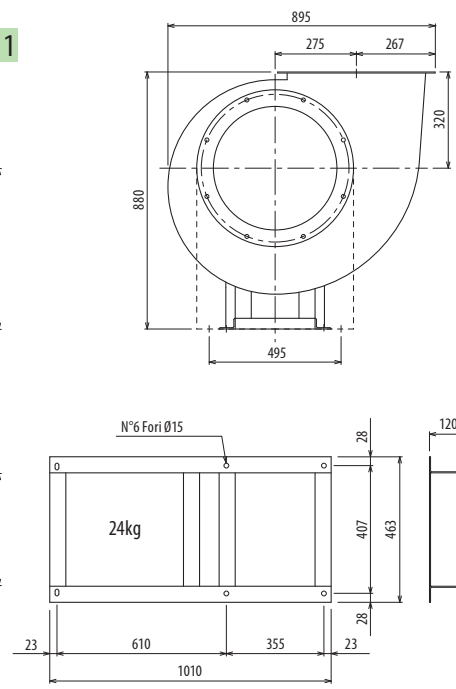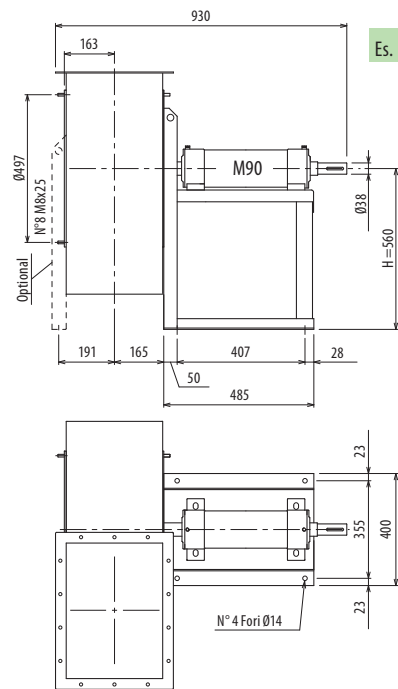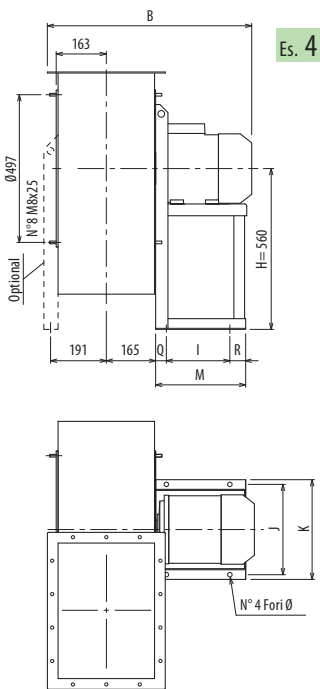


The fan is revolvable - The weight indicated in the table includes motor

Further information and sizes


Type		Weight Kg	PD ² Kg f x m ²	B	I	H	H1	H2	J	K	M	Q	R	Ø
Fan	Motor													
PR450/2R	132 S2	124	1,2	751	237	560	320	560	337	372	345	44	64	12
PR450/2	160 M2	161	1,9	860	337	560	320	560	395	440	446	55	54	14
PR450/4R	80 B4	89	1,0	600	121	560	320	560	203	225	217	46	50	10
PR450/4	90 S4	94	1,8	647	133	560	320	560	234	260	251	58	60	10
PR450/T		105	1,9			560	320	560						

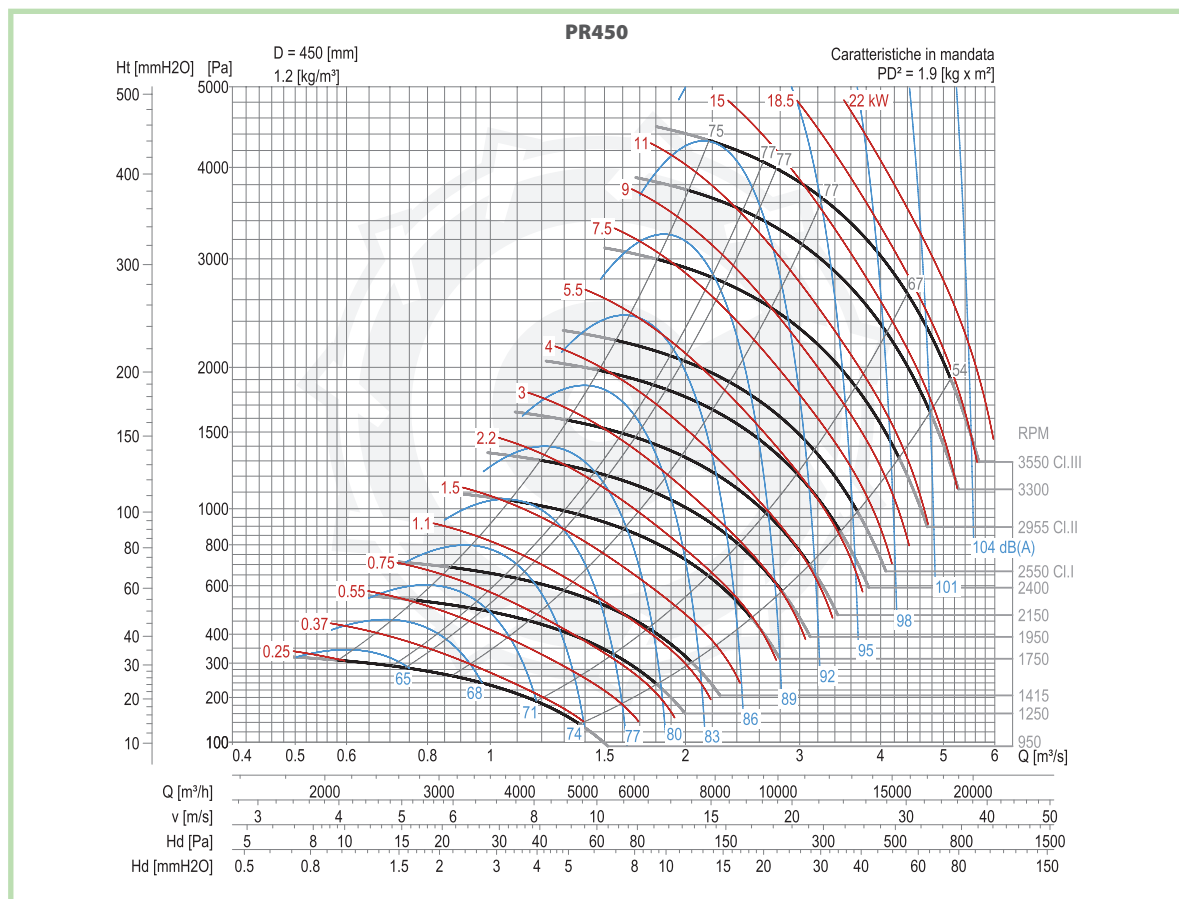










PR

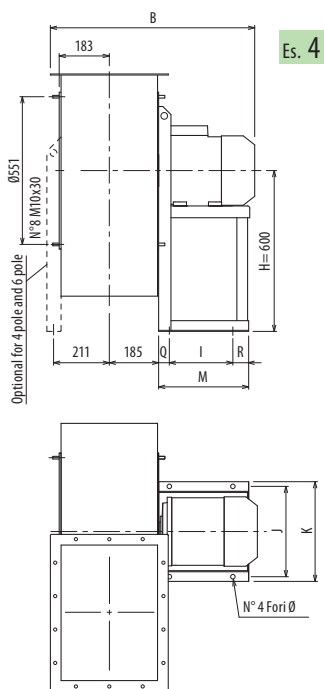

Es. 4

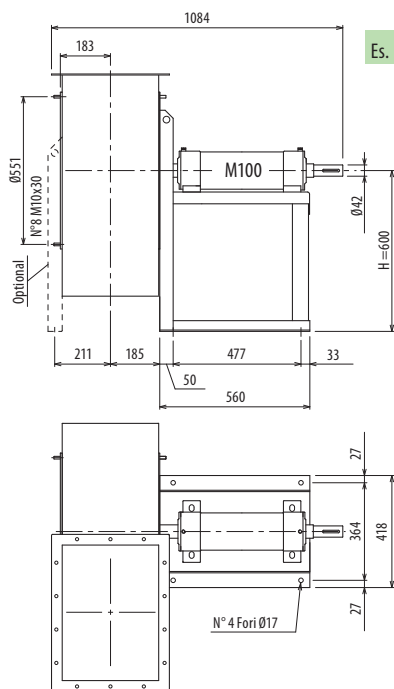

Es. 1

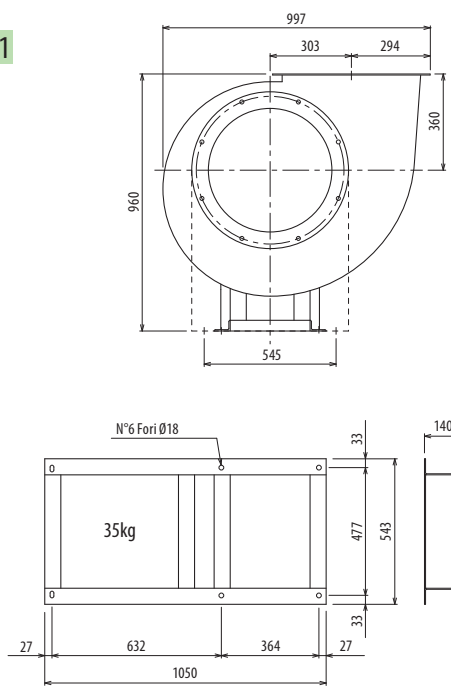


The fan is revolable - The weight indicated in the table includes motor




Further information and sizes

Type		Weight	PD ²												
Fan	Motor	Kg	Kgf x m ²	B	I	H	H1	H2	J	K	M	Q	R	Ø	
PR500/2R	160 M2	187	2,4	913	337	600	360	600	395	440	446	55	54	14	
PR500/2	160 L2	196	2,7	913	337	600	360	600	395	440	446	55	54	14	
PR500/4R	90 L4	123	2,3	687	133	600	360	600	234	260	251	58	60	10	
PR500/4	100 L4	130	2,6	718	197	600	360	600	289	324	285	34	54	12	
PR500/6R	80 A6	115	2,2	640	121	600	360	600	203	225	217	48	48	10	
PR500/6	80 B6	117	2,5	640	121	600	360	600	203	225	217	48	48	10	
PR500/T		145	2,7			600	360	600							

pg. / s.
4,6

pg. / s.
4,5










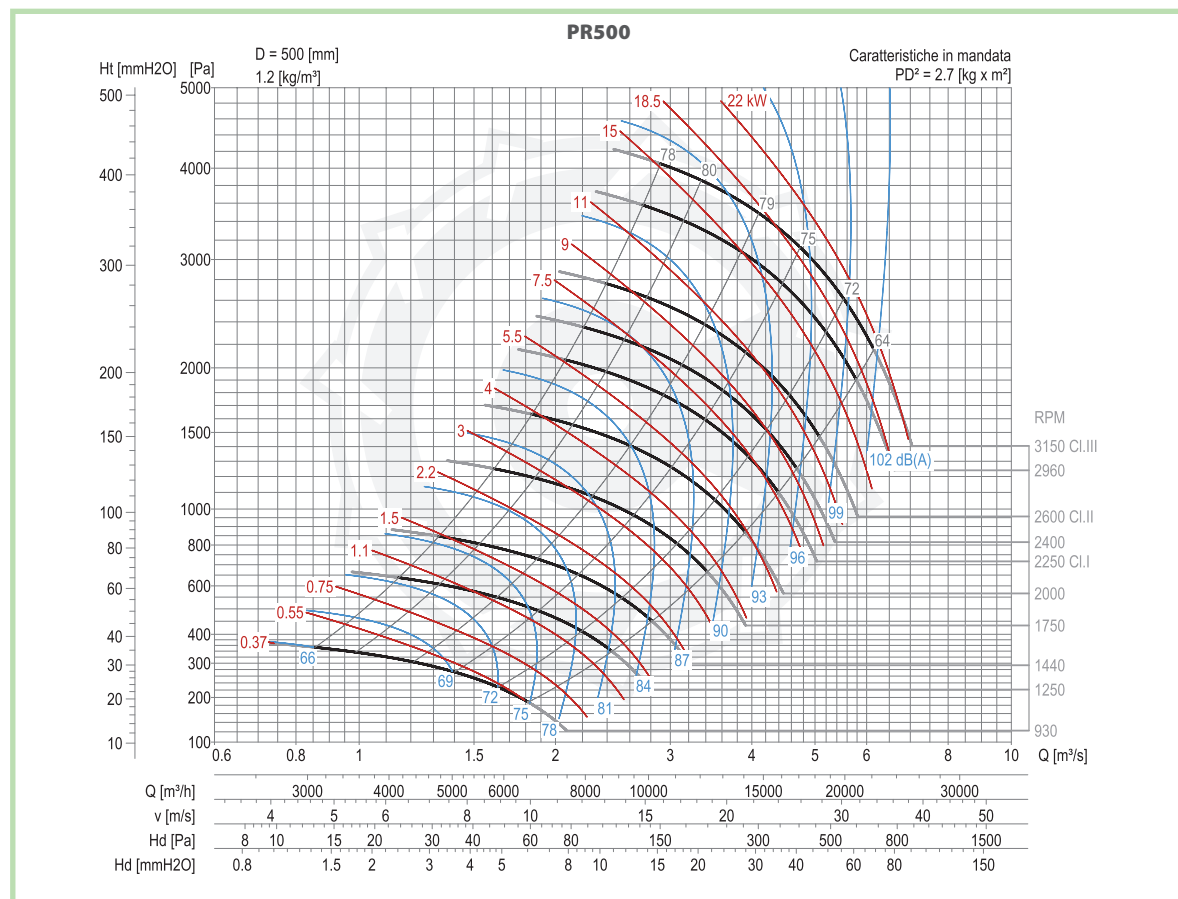










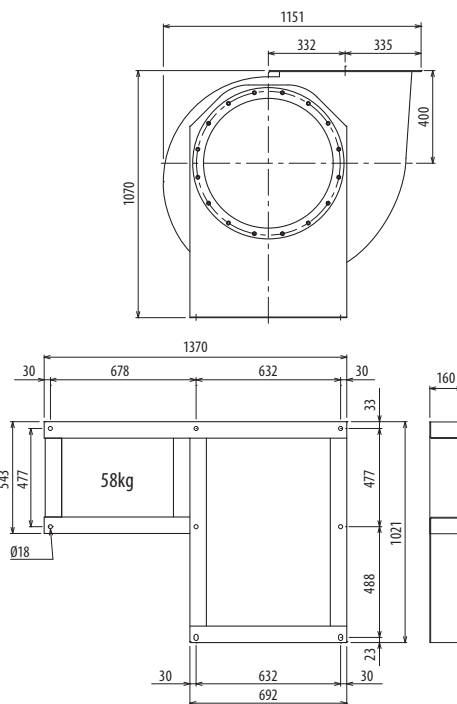
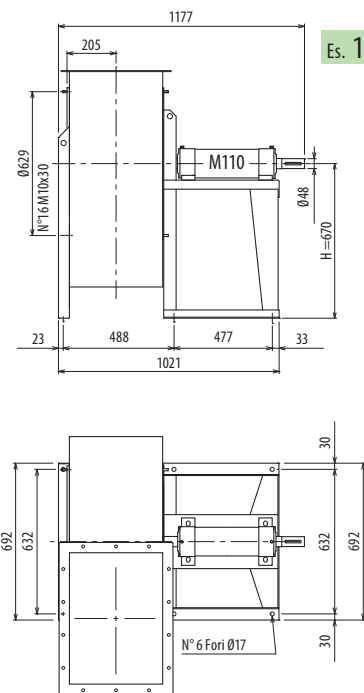
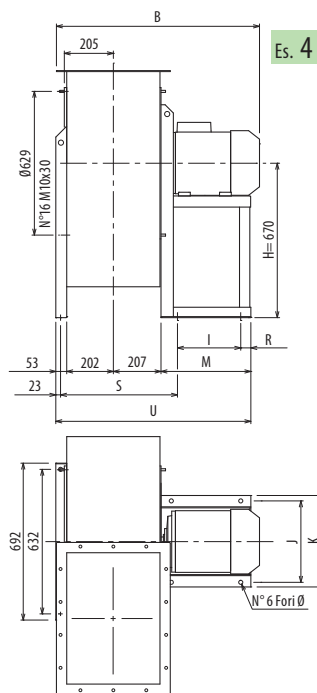


The fan is revolvable • The weight indicated in the table includes motor

TIPO • Type		PESO	PD ²												
VENTILATORE	MOTORE	Weight		B	I	H	H1	H2	J	K	M	R	S	U	Ø
Fan	Motor	Kg	Kgf x m ²												
PR560/4R	100 L4	153	3,7	774	197	670	400	670	289	324	280	54	468	742	12
PR560/4	112 M4	158	4,3	795	197	670	400	670	289	324	280	54	468	742	12
PR560/6R	90 S6	141	3,5	743	133	670	400	670	234	260	247	60	493	709	10
PR560/6	90 L6	145	4,1	743	133	670	400	670	234	260	247	60	493	709	10
PR560/T		196	4,6			670	400	670							

Further information and sizes

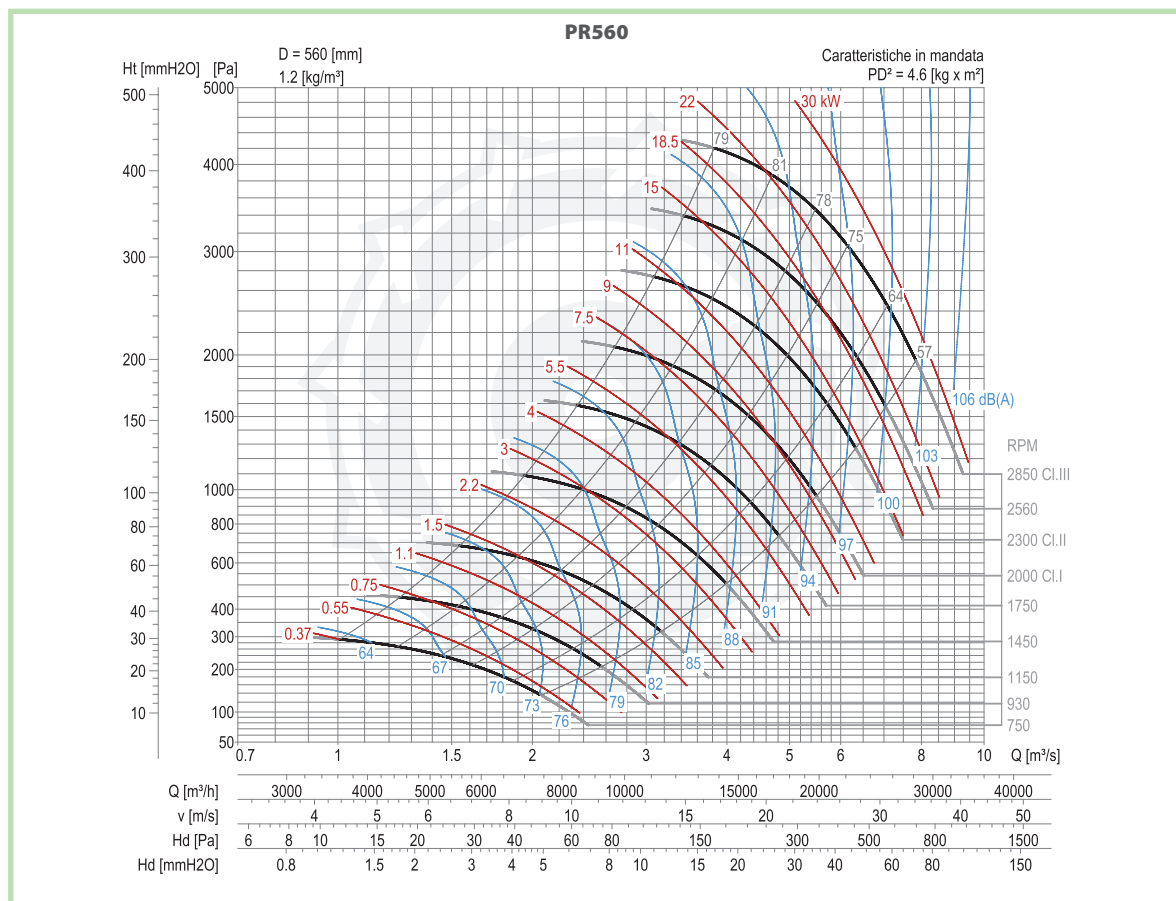



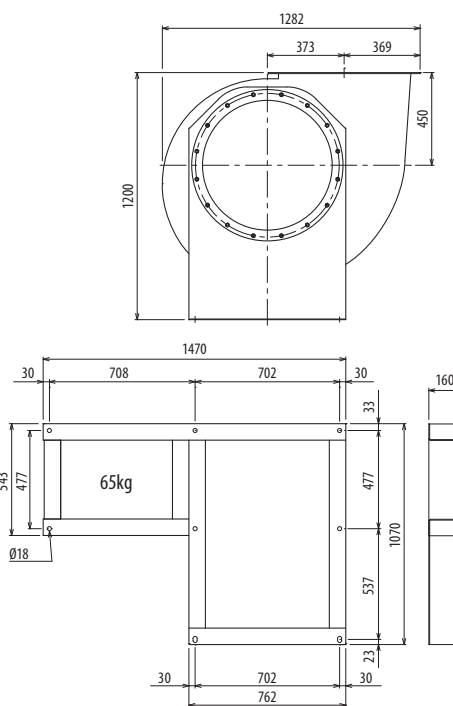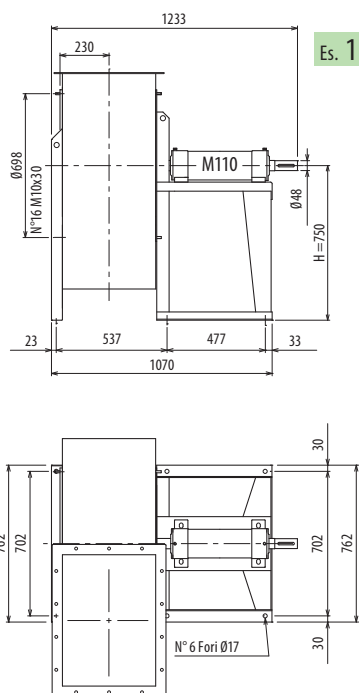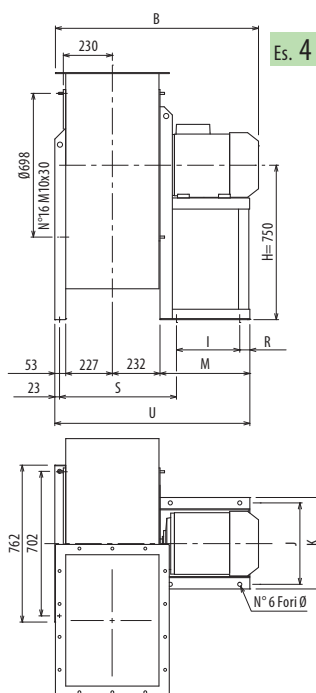


The fan is revolvable - The weight indicated in the table includes motor


Further information and sizes

Type		Weight	PD ²														
Fan	Motor	Kg	Kgf x m ²	B	I	H	H1	H2	J	K	M	R	S	U	Ø		
PR630/4R	132 S4	202	6,2	885	237	750	450	750	337	372	340	64	527	851	12		
PR630/4	132 M4	214	7,5	885	237	750	450	750	337	372	340	64	527	851	12		
PR630/6R	100 L6	173	6	824	197	750	450	750	289	324	280	54	517	791	12		
PR630/6	112 M6	180	7,2	845	197	750	450	750	289	324	280	54	517	791	12		
PR630/T		239	8,1			750	450	750									

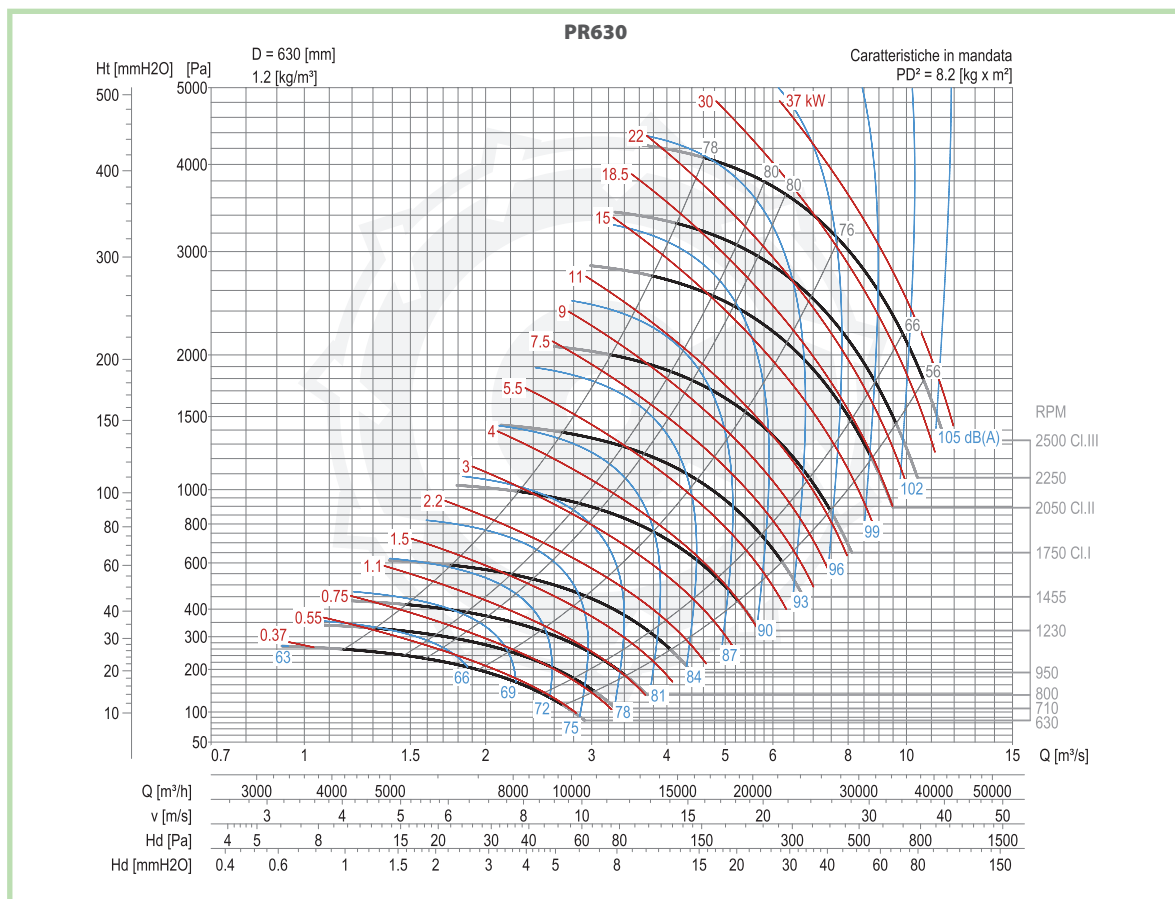


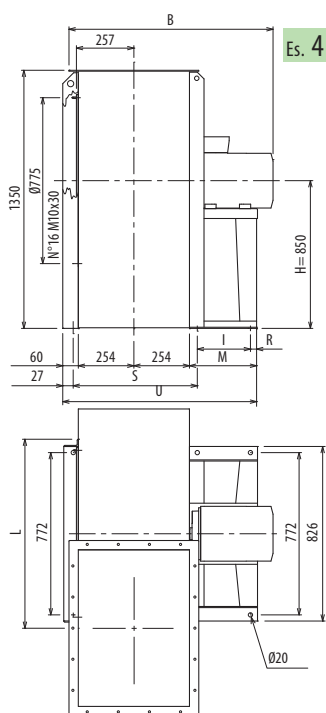

Es. 4

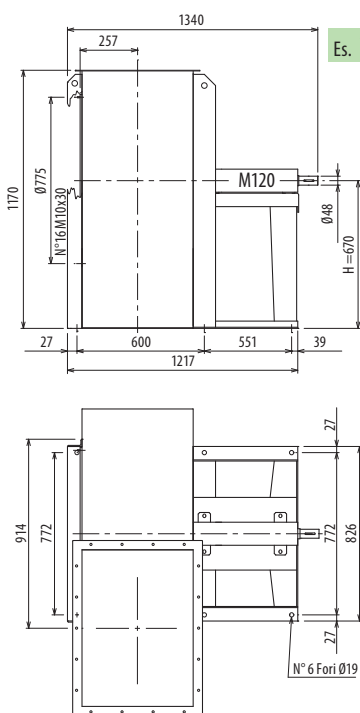

Es. 1









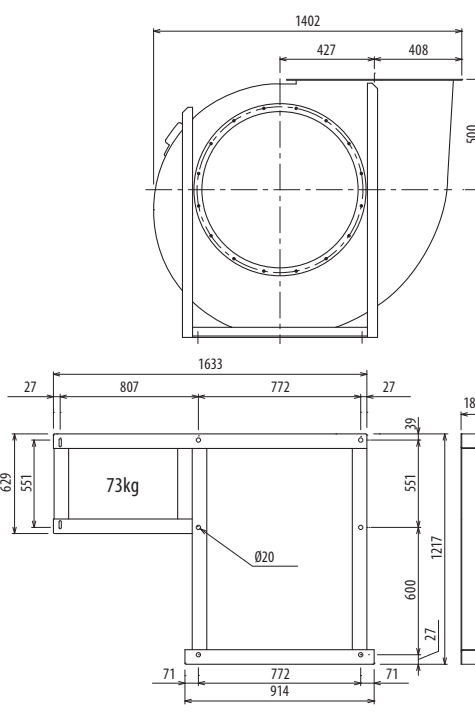


The fan is not revolvable - The weight indicated in the table includes motor













Type	Fan	Motor	Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	L	R	M	S	U
PR700/4R*	160 M4	315	13	1045	316	850	500	850	832	60	439	606	1009	
PR700/4*	160 L4	326	15	1045	316	850	500	850	832	60	439	606	1009	
PR700/6R*	132 S6	276	13	940	201	850	500	850	832	75	336	606	909	
PR700/6*	132 M6	286	15	940	201	850	500	850	832	75	336	606	909	
PR700/T		360	16		670	500	850							

* The fan is revolvable

Further information and sizes

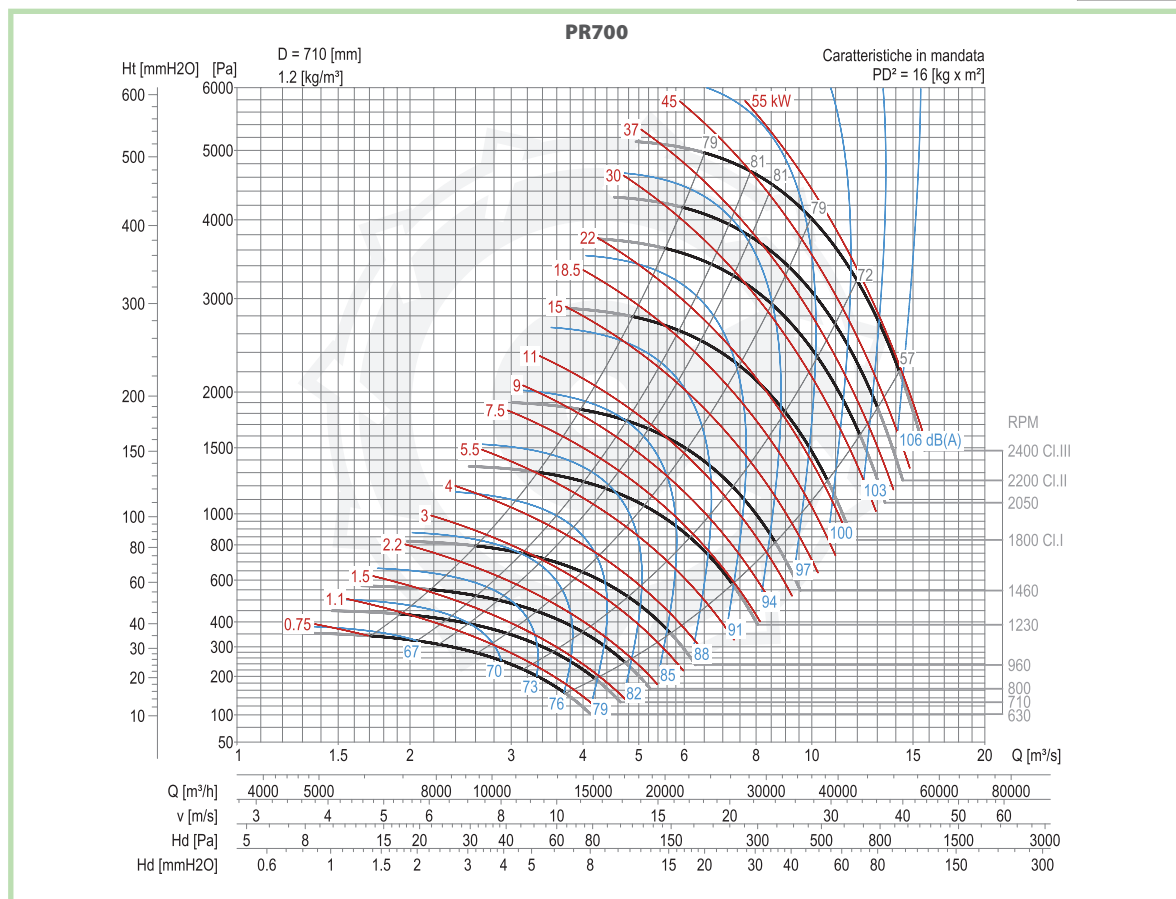

PR

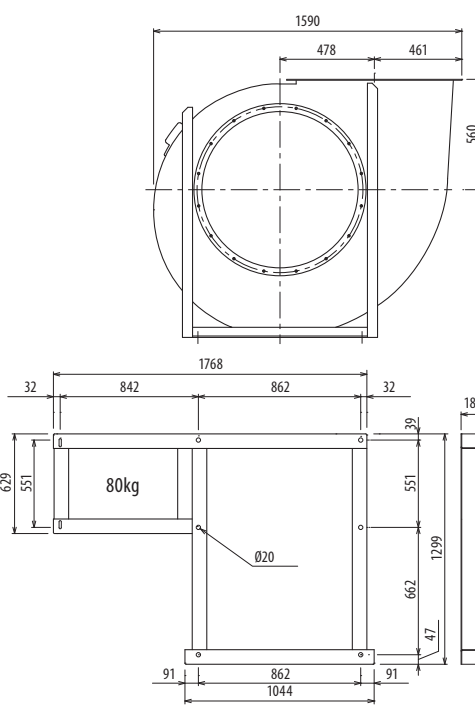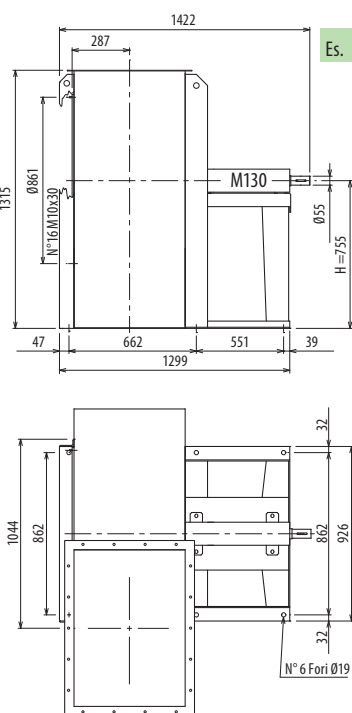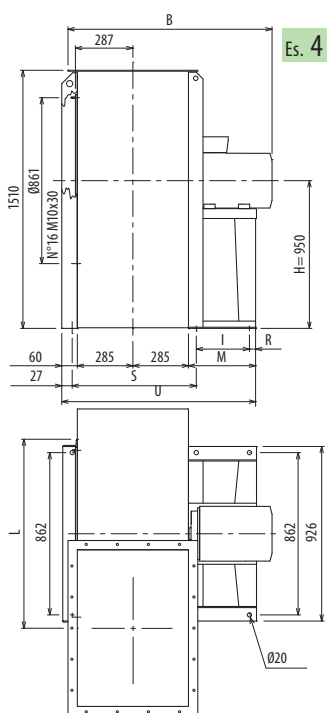

The fan is not revolvable - The weight indicated in the table includes motor

Type	Fan	Motor	Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	L	R	M	S	U
PR800/4R*	180 M4	465	25	1188	361	950	560	950	932	39	463	668	1095	
PR800/4*	180 L4	484	30	1239	361	950	560	950	932	39	463	668	1095	
PR800/6R*	132 M6	367	20	1002	201	950	560	950	932	75	336	668	971	
PR800/6*	160 M6	397	25	1107	316	950	560	950	932	60	439	668	1071	
PR800/T		442	30			755	560	950						


*




* The fan is revolvable




Further information and sizes




PR800

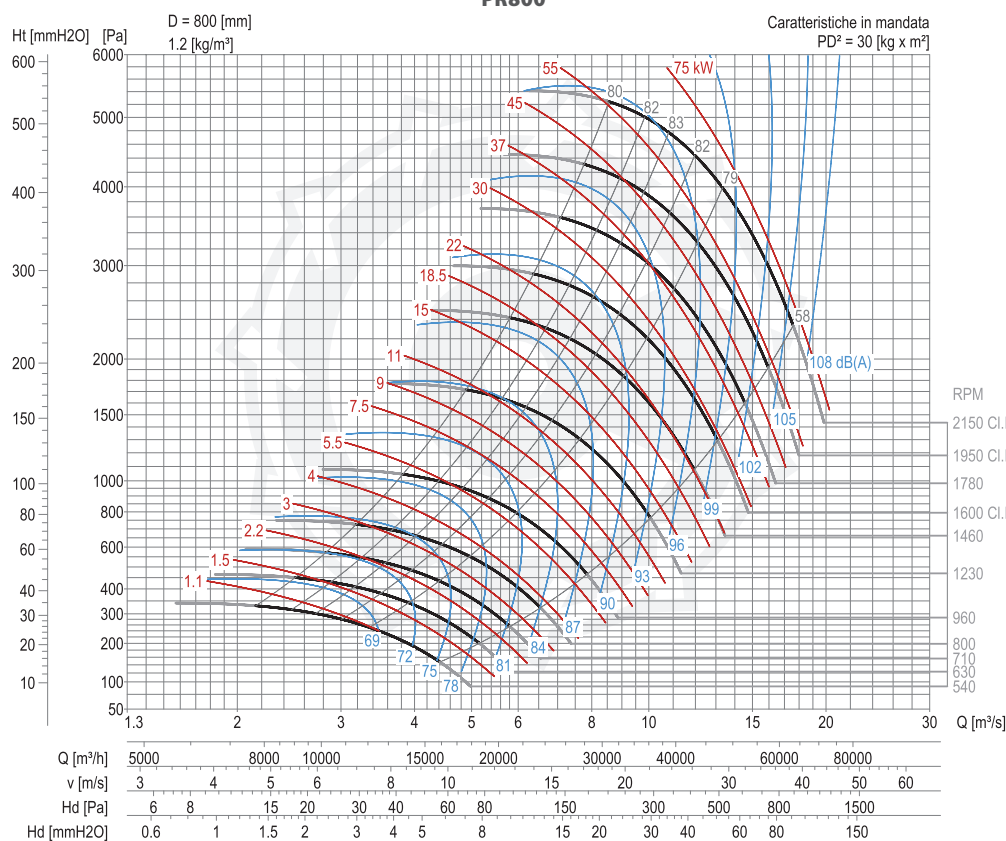


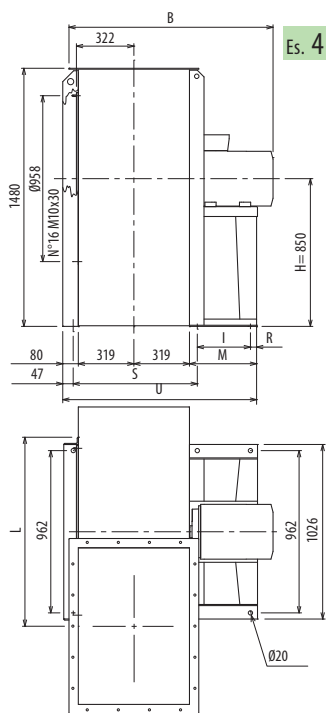

Es. 4

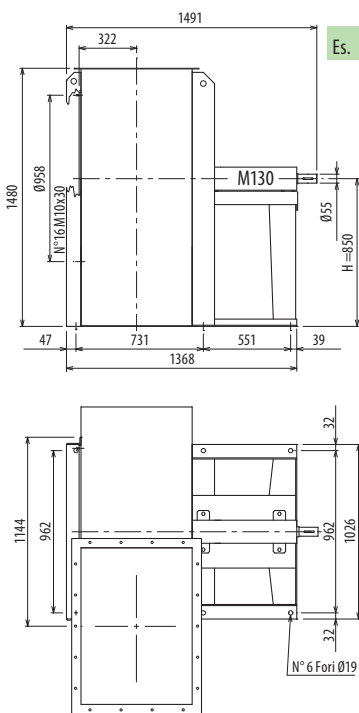











Es. 1

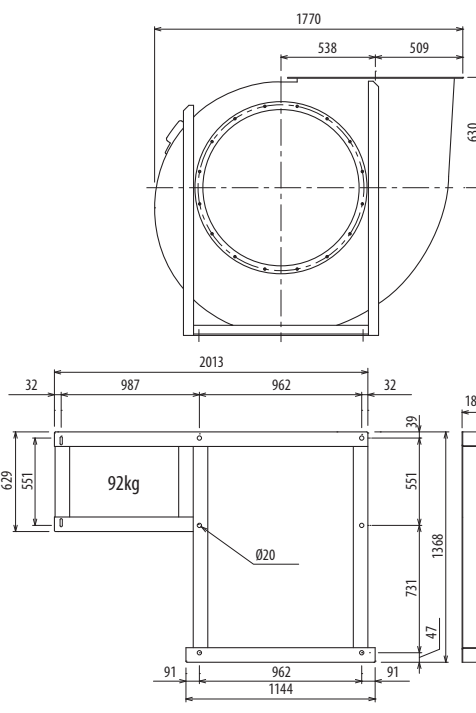


The fan is not revolvable - The weight indicated in the table includes motor


Type																			
Fan	Motor	Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	L	R	M	S	U						
PR900/4R	225 S4	840	40	1367	441	850	630	1060	1145	39	540	731	1258						
PR900/4	225 M4	847	45	1427	441	850	630	1060	1145	39	540	731	1258						
PR900/6R	160 L6	556	35	1196	316	850	630	1060	1145	60	436	731	1154						
PR900/6	180 L6	658	40	1328	361	850	630	1060	1145	39	460	731	1178						
PR900/T		570	45			850	630	1060											

Further information and sizes

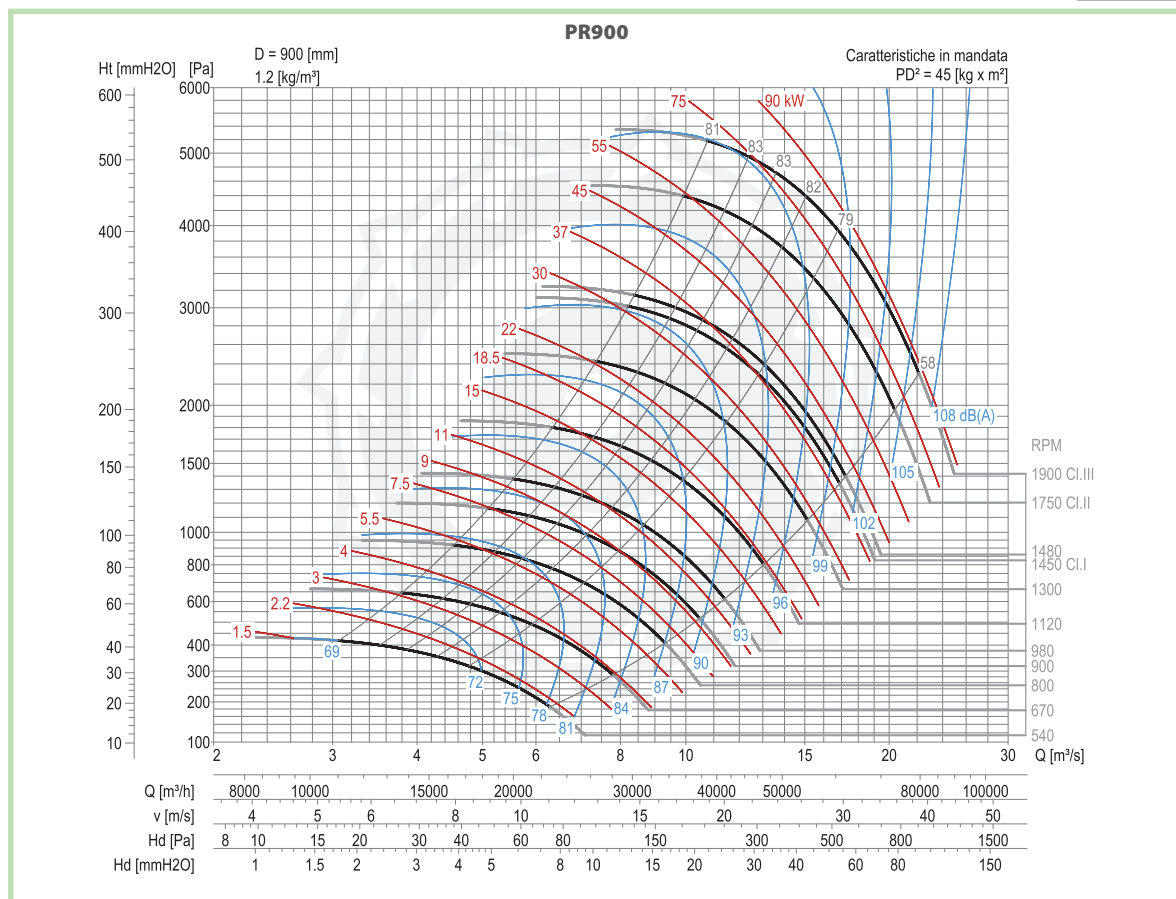


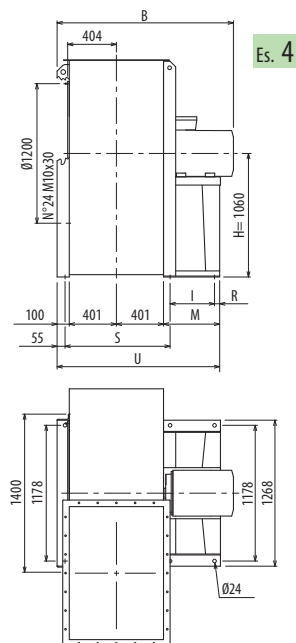

Es. 4

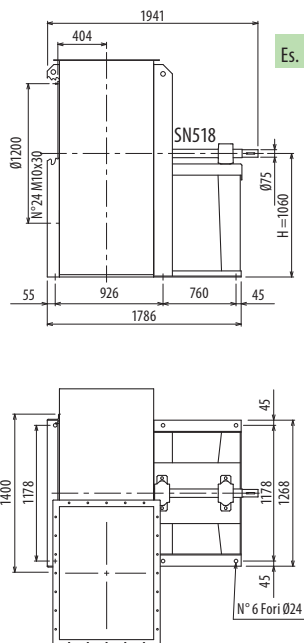










Es. 1

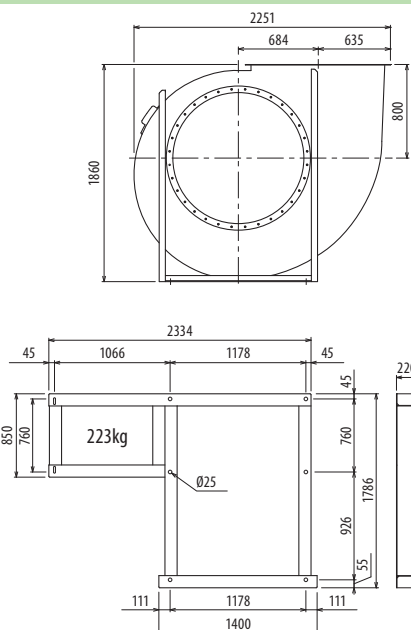


The fan is not revolable - The weight indicated in the table includes motor


Type		Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	R	S	M	U
Fan	Motor											
PR1100/6R	225 M6	1153	115	1611	415	1060	800	1320	45	926	540	1441
PR1100/6	250 M6	1242	130	1719	475	1060	800	1320	45	926	600	1501
PR1100/T		1065	135			1060	800	1320				

Further information and sizes




PR










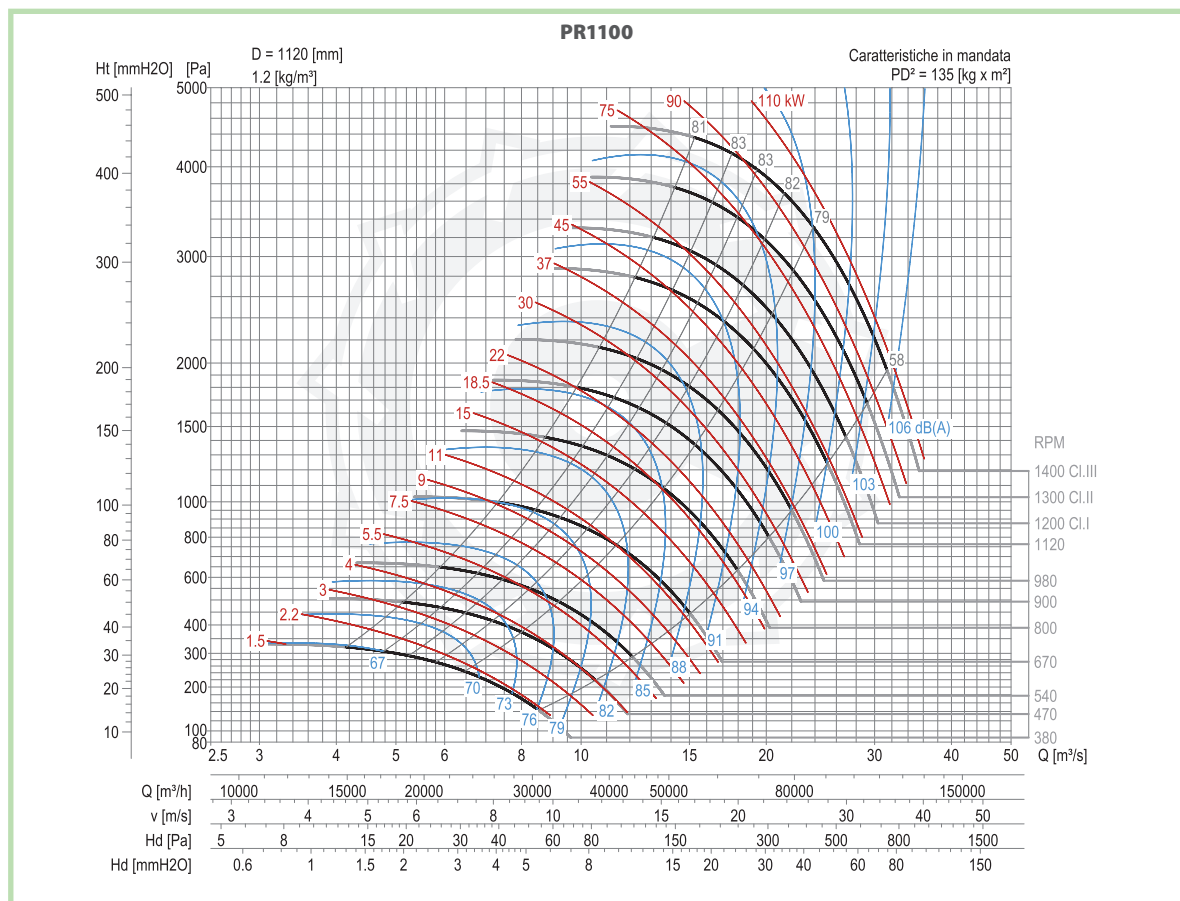


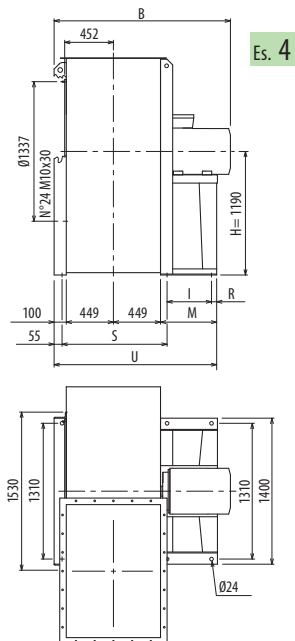

Es. 4

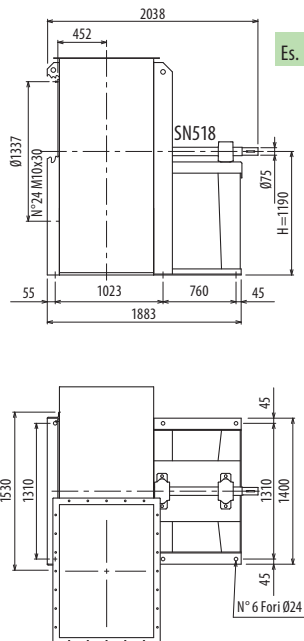



Es. 1

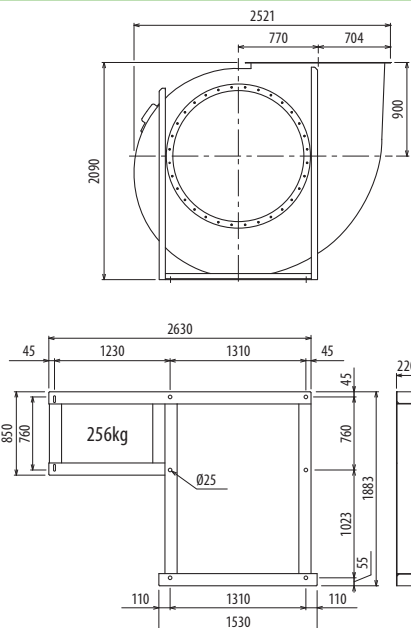


The fan is not revolable - The weight indicated in the table includes motor


Further information and sizes

TIPO • Type		PESO Weight	PD ²										
VENTILATORE Fan	MOTORE Motor	Kg	Kgf x m ²	B	I	H	H1	H2	R	S	M	U	
PR1250/6R	280 M6	1739	210	1818	565	1190	900	1500	45	1023	690	1688	
PR1250/6	315 S6	1980	240	2030	675	1190	900	1500	45	1023	800	1798	
PR1250/T		1258	240			1190	900	1500					









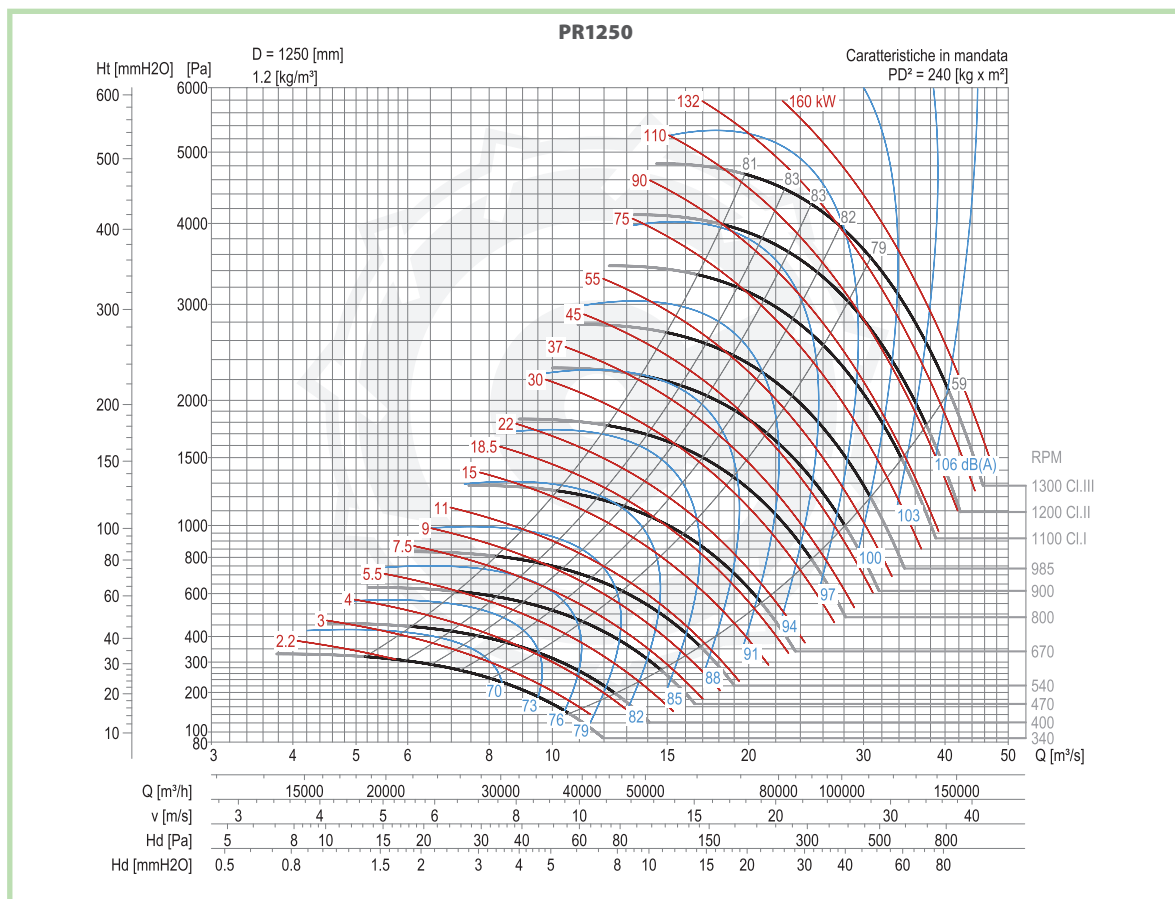



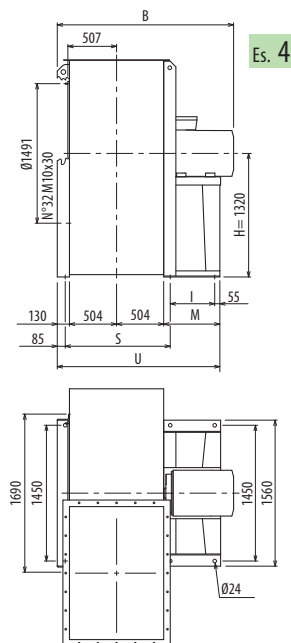

Es. 4

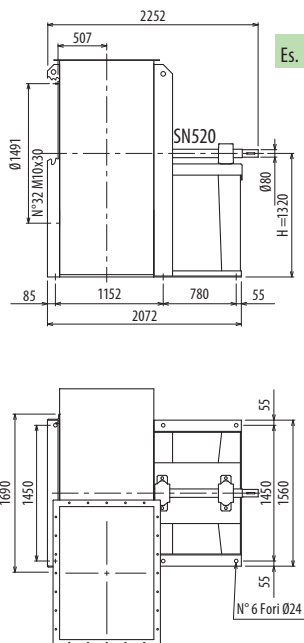



Es. 1


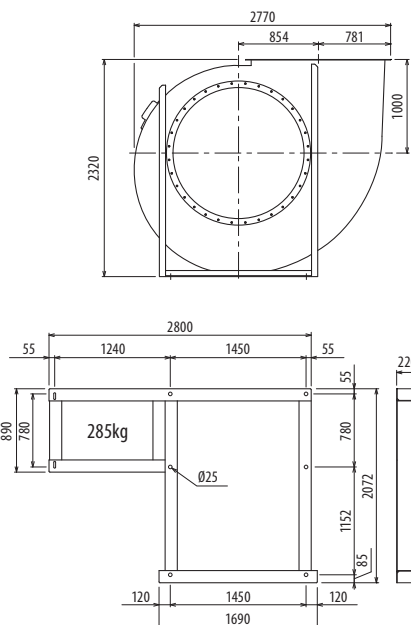


The fan is not revolvable - The weight indicated in the table includes motor

Type		Weight Kg	PD ² Kg x m ²	B	I	H	H1	H2	H3	H4	M	S	U
Fan	Motor												
PR1400/6R	315 M6	2630	379	2330	645	1320	1000	1700	1320	1700	800	1152	1937
PR1400/6	315 M6	2651	379	2330	645	1320	1000	1700	1320	1700	800	1152	1937
PR1400/T		1712	379			1320	1000	1700	1120	1500			

Further information and sizes


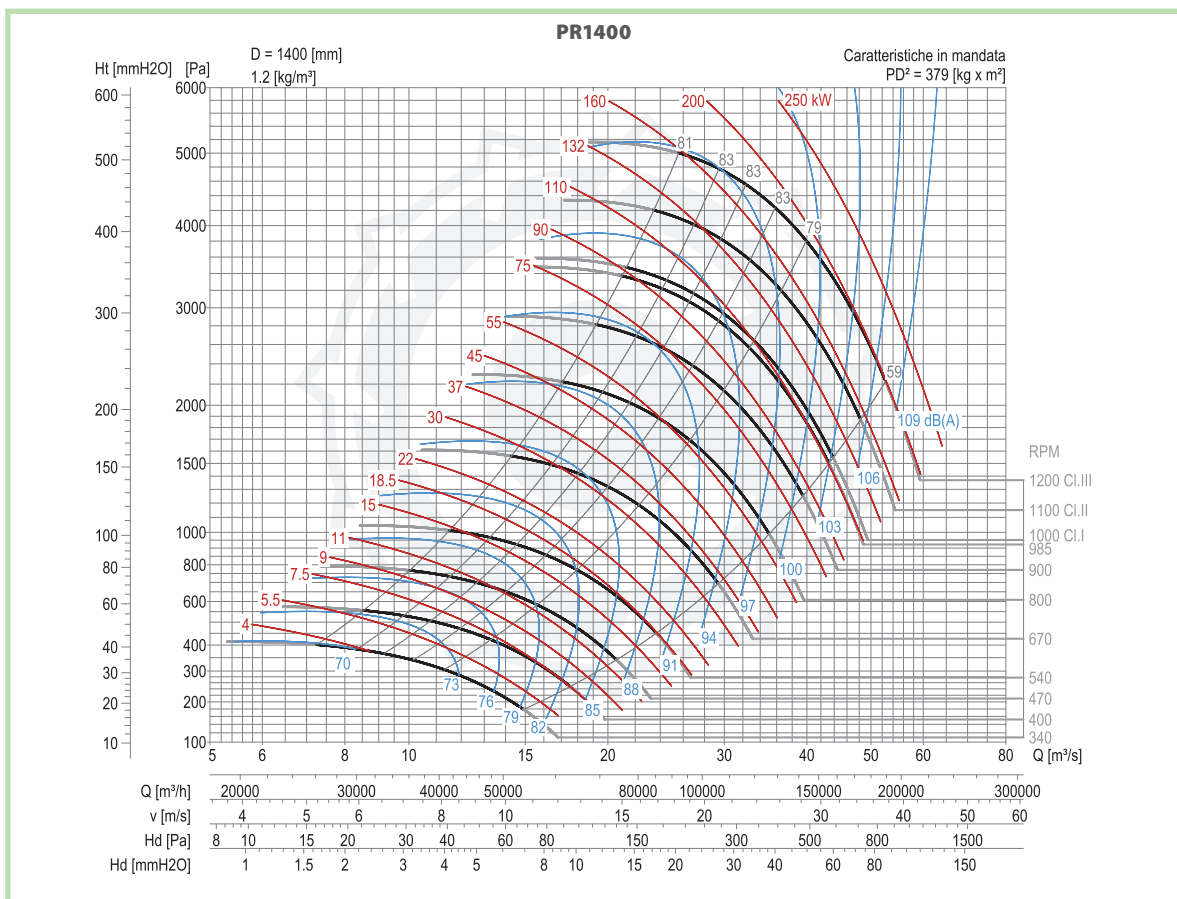



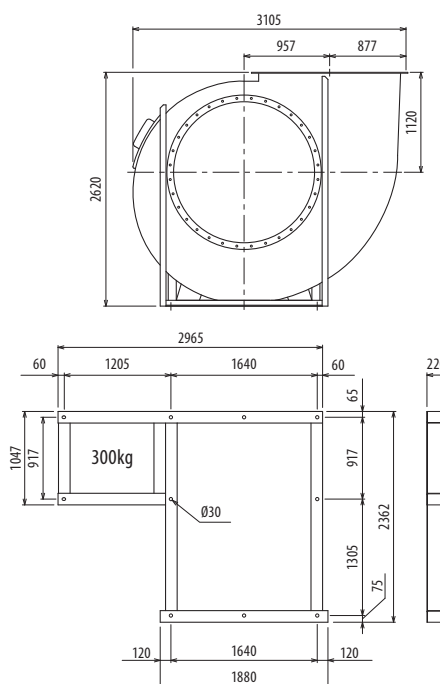
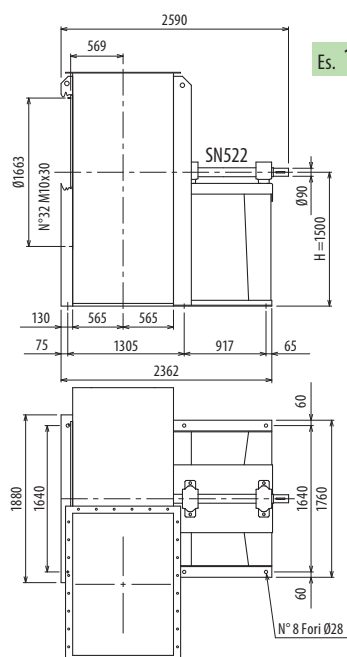


The fan is not revolvable

Further information and sizes

TIPO • Type		PESO Weight Kg	PD² Kgf x m²	B	I	H	H1	H2	H3	H4	H5				
VENTILATORE Fan	MOTORE Motor														
PR1600/T		2363	635			1500	1120	1900	1250	1600					

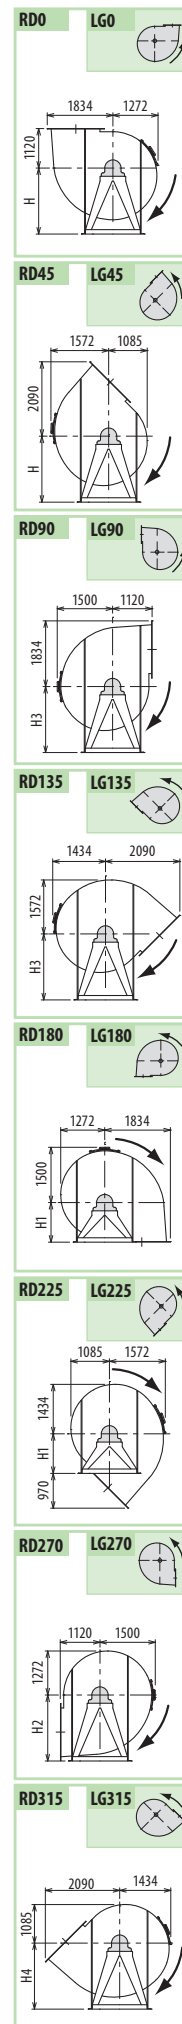
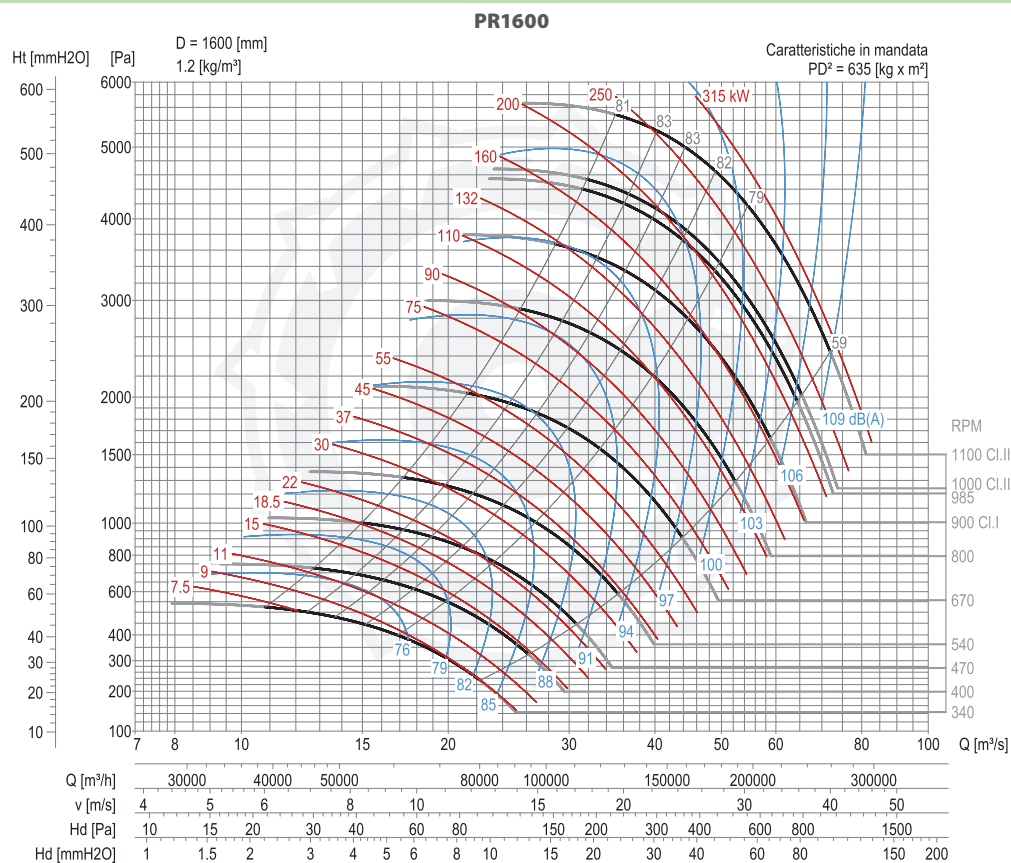



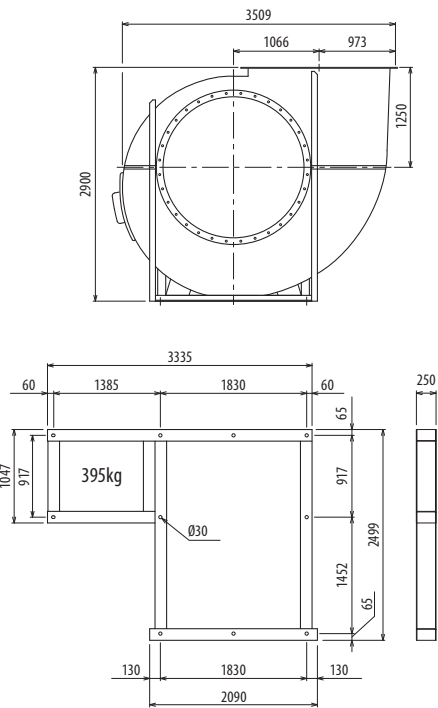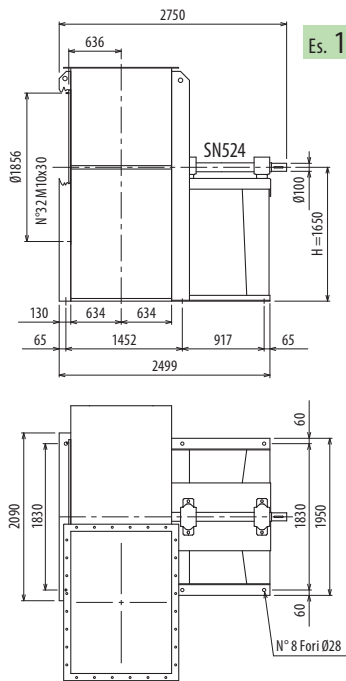


The fan is not revolvable

Further information and sizes


Type		Weight Kg	PD ² Kg x m ²	B	I	H	H1	H2	H3	H4	H5	H6								
Fan	Motor																			
PR1800/T		2912	1405			1650	1250	2120	1570	1400	1320	1800								

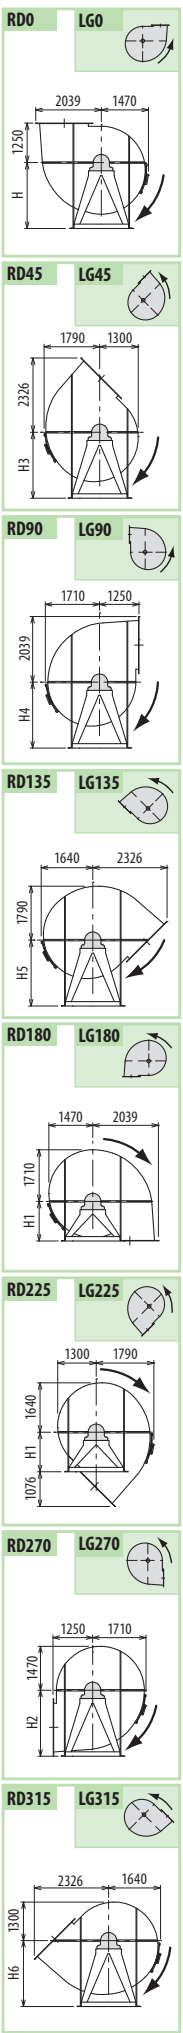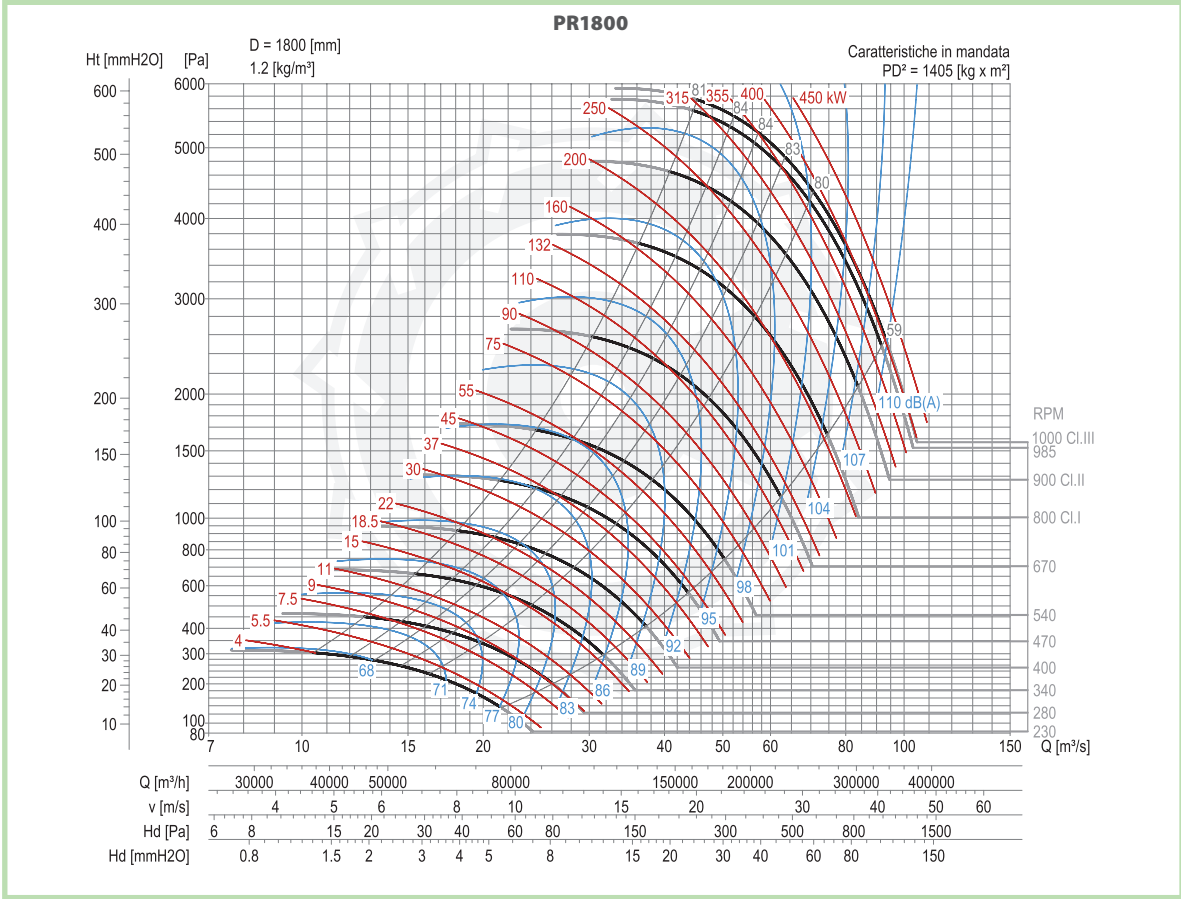

PR

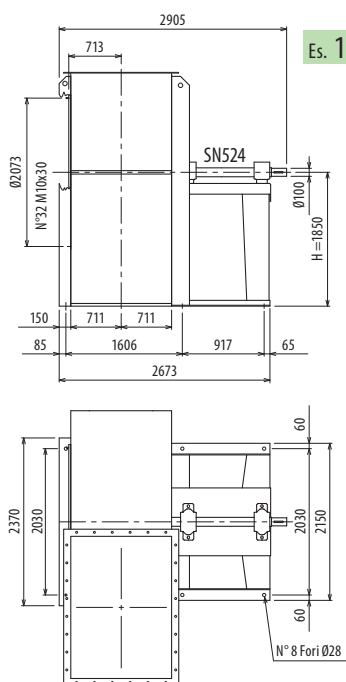

Es. 1

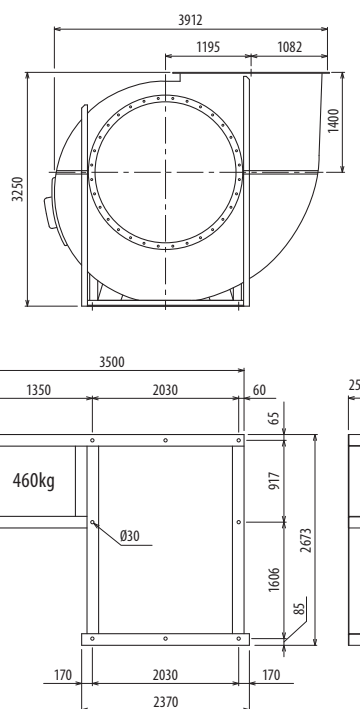

The fan is not revolable

Further information and sizes

Type		Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	H3	H4	H5	H6
Fan	Motor											
PR2000/T		3413	2260			1850	1400	2360	1750	1600	1450	2000

