


Mod. PRU

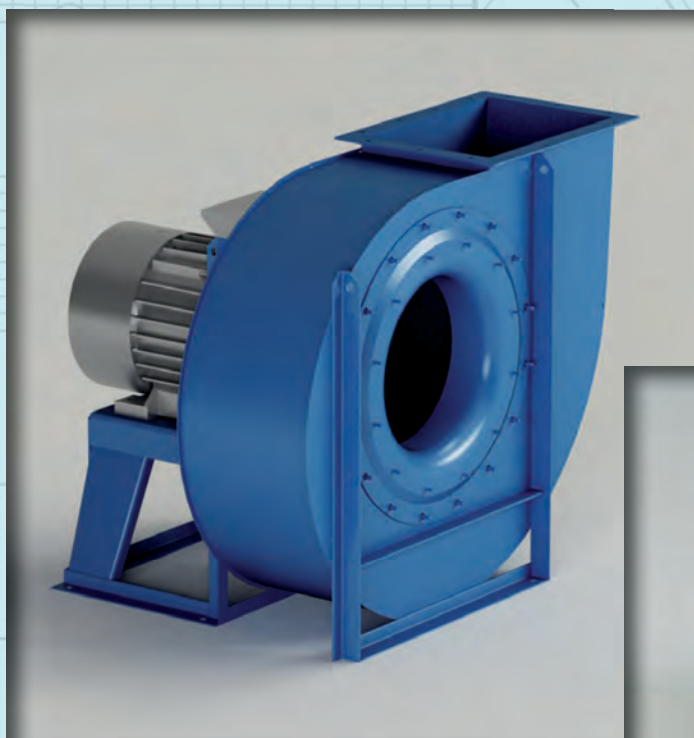


$Q = 360 \div 216000 \text{ m}^3/\text{h}$

$Q = 0.1 \div 60 \text{ m}^3/\text{s}$

$p_t = 70 \div 915 \text{ mmH}_2\text{O}$

$p_t = 700 \div 9000 \text{ Pa}$

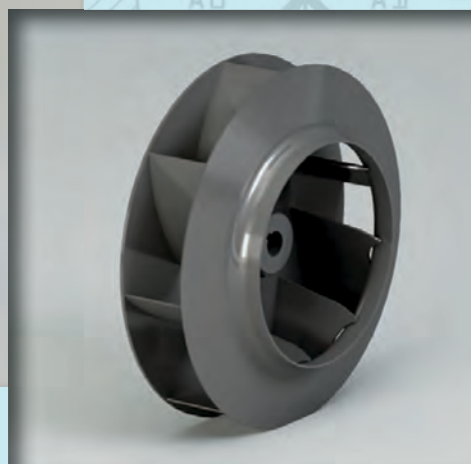

• Values valid up to 60°C

	60°C	100°C	4%
	100°C	150°C	10%
	150°C	200°C	16%
	200°C	250°C	23%
• between	250°C	300°C	30%
• zwischen	300°C	350°C	37%
	350°C	400°C	45%
	400°C	450°C	54%
	450°C	500°C	64%

• and • degrade speed

Field of operation

Low-medium-high flow rates. Average pressures.

Blade type

Curve, backward (negative), see pg. 2.2.

Applications

For the inlet and transport of clean or dusty air, also containing low quantities of sawdust, various chips, granular materials, with the exclusion of filaments.

Standard constructional arrangements

Arr.1-Arr.4-Arr.5-Arr.8-Arr.9-Arr.12, see pgs. 2.5 - 2.6.

Standard fluid temperatures

-10÷+60°C. For other temperatures see pgs. 1.12 to 1.15.

Type of construction

Fan in Fe360 plate, impeller in Fe360 statically and dynamically balanced. For other materials see pgs. 1.12 to 1.15.

Operating specifications

Condition of inlet air T=20°C, 0 m above sea level and $\rho=1.205 \text{ kg/m}^3$.

Noise level

Expressed as sound power L_w A [dB(A)] measured in free field with ducted fan, see pgs. 1.43 to 1.49.

Orientations

No.8 RD (clockwise viewed from transmission side) and No.8 LG. Fan in bolted orientable version for sizes 400-630, fixed orientation for sizes 710-2000. See pg. 2.7.

Special applications


See pgs. 2.20 to 2.34.

Impeller classes

The above table refers to standard operating conditions, in heavy-duty service conditions it is advisable to contact the CORAL Customer Service to establish the most suitable type of impeller.

GRANDEZZA VENTILATORE	Max rpm			
	CLASSE I	CLASSE II	CLASSE III	CLASSE IV
Size				
PRU250	5000			
PRU280	4750			
PRU310	4500			
PRU350	4250			
PRU400	4000	5600		
PRU450/R	3750	5400		
PRU450	3600	5000		
PRU500/R	3500	4750		
PRU500	3400	4500	5000	
PRU560/R	3300	4250	4750	
PRU560	3200	4000	4500	
PRU630/R	3100	3750	4250	
PRU630	2960	3600	4000	
PRU710/R	2800	3400	3750	
PRU710	2600	3200	3550	
PRU800/R	2500	3000	3350	3570
PRU800	2350	2800	3150	3500
PRU900/R	2200	2650	3000	3300
PRU900	2100	2500	2800	3100
PRU1000/R	2000	2350	2700	
PRU1000	1900	2250	2550	
PRU1120/R	1800	2150	2400	
PRU1120	1700	2000	2250	
PRU1250/R	1600	1900	2100	
PRU1250	1500	1800	2000	
PRU1400/R	1400	1700	1900	
PRU1400	1300	1600	1800	
PRU1600	1100	1400	1600	
PRU1800	1200	1350	1450	
PRU2000	1000	1150	1250	

pt [mmH₂O]

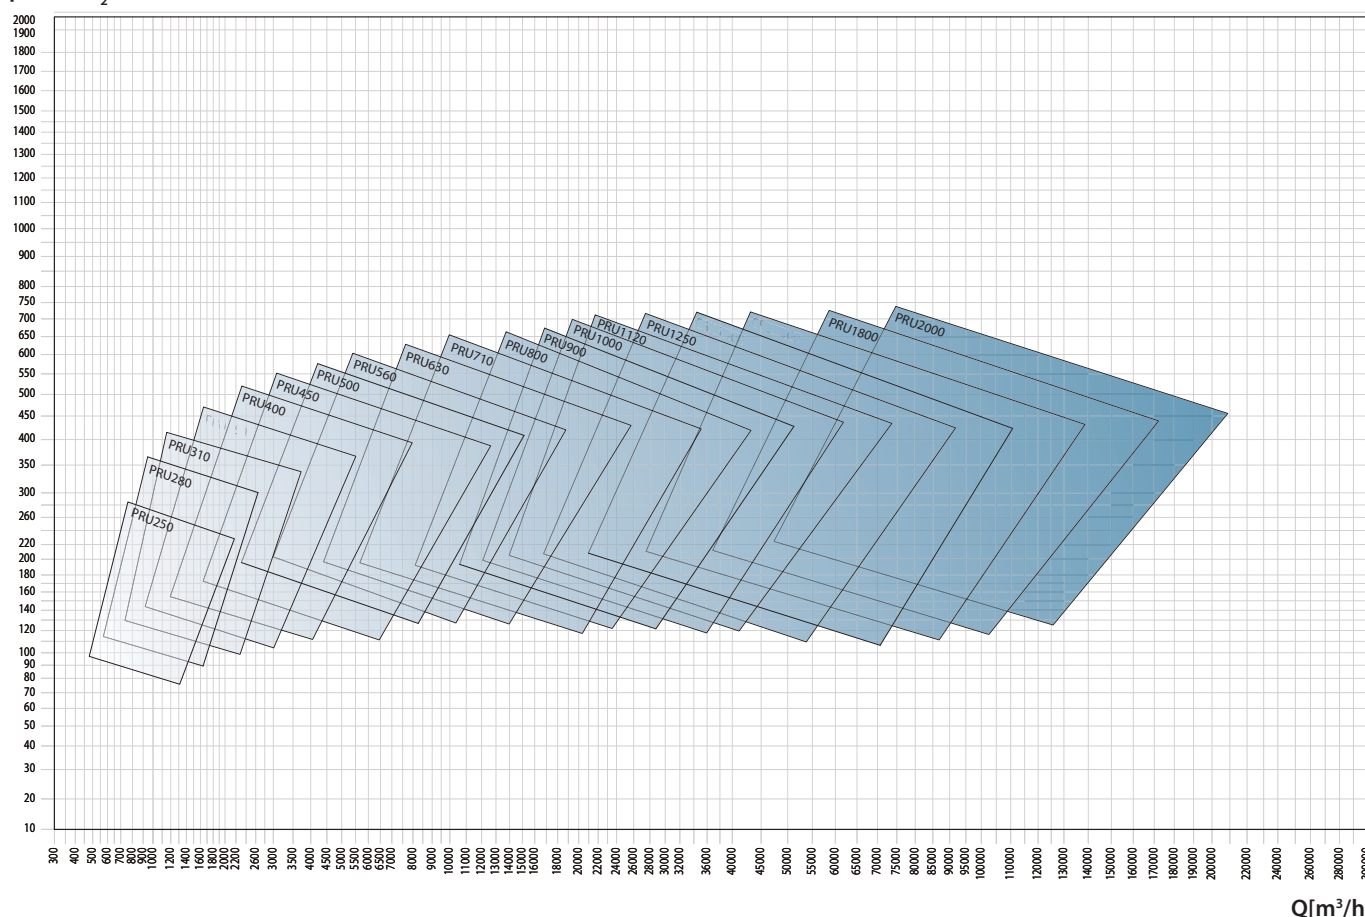











Type		P inst. [kW]	n	LpA [dB(A)]	• Load tolerance ±5%																			
Fan	Motor																							
					Q [m³/h]																			
					470	540	650	720	790	865	935	1080	1225	1370	1440	1620	1800	2160	2520	2880	3240	3600	3960	4320
pt[mmH₂O]																								
PRU250/2	71	0,37	2800	56	91	90	88	86	84	82	80	74												
PRU280/2	71	0,55	2800	59		115	114	113	112	111	109	106	101	96	93									
PRU310/2	80	1,1	2845	60					154	154	153	153	152	151	150	148	145	138						
PRU350/2	90	2,2	2920	64								200	198	197	196	195	194	192	189	183				
PRU400/2	100	3	2930	68												257	256	255	255	254	249			
PRU400/2	112	4	2940	68												257	256	255	255	254	249	243	235	230
PRU450/2R	132	5,5	2940	71															308	304	299	294	287	279
PRU450/2	132	5,5	2940	67																340	336	333	327	321
PRU450/2	132	7,5	2940	73																340	336	333	327	321
PRU500/2R	132	7,5	2940	68																		386	382	378
PRU500/2	132	9,2	2940	69																			418	416
PRU500/2	160	11	2960	74																			426	423
PRU560/2R	160	15	2960	74																				
PRU560/2	160	15	2960	70																				
PRU560/2	160	18,5	2960	77																				
PRU630/2R	180	22	2960	74																				
PRU630/2R	200	30	2960	78																				
PRU630/2	200	30	2960	74																				
PRU630/2	200	37	2960	79																				
PRU710/2R	225	45	2970	75																				
PRU710/2R	250	55	2970	80																				
PRU710/2	250	55	2970	76																				
PRU710/2	280	75	2970	82																				
PRU800/2R	280	90	2970	82																				
PRU800/2	315	110	2970	83																				
PRU500/4	90	1,1	1415	56													97	96	94	92	88	84		
PRU560/4	100	2,2	1420	60																121	119	118	117	114
PRU630/4	112	4	1440	63																		154	153	152
PRU710/4R	132	5,5	1460	66																				
PRU710/4	132	7,5	1470	68																				
PRU800/4R	160	11	1470	69																				
PRU800/4	160	15	1470	71																				
PRU900/4R	180	18,5	1470	73																				
PRU900/4R	180	22	1470	73																				
PRU900/4	200	30	1470	74																				
PRU1000/4R	225	37	1470	75																				
PRU1000/4	225	45	1470	77																				
PRU1120/4R	250	55	1475	76																				
PRU1120/4	280	75	1480	79																				
PRU1250/4R	315	110	1485	80																				
PRU1250/4	315	132	1485	81																				
PRU1400/4R	315	200	1490	82																				
PRU1400/4	315	250	1490	84																				
PRU800/6	132	4	950	63																				
PRU900/6	160	7,5	960	63																				
PRU1000/6R	160	11	980	66																				
PRU1000/6	180	15	980	67																				
PRU1120/6R	200	18,5	980	67																				
PRU1120/6	200	22	980	70																				
PRU1250/6R	225	30	980	71																				
PRU1250/6	250	37	980	72																				
PRU1400/6R	280	45	980	74																				
PRU1400/6	315	75	980	75																				

- Noise tolerance $\pm 4\text{dB(A)}$

■ The A-weighted sound power level, L_{pA} (Chap.14), is the value measured in test conditions at the point of maximum noise level.

Type		P inst. [kW]	n	LpA [dB(A)]	• Load tolerance ±5%																			
Fan	Motor				Q [m³/h]																			
					470	540	650	720	790	865	935	1080	1225	1370	1440	1620	1800	2160	2520	2880	3240	3600	3960	4320
					pt[mmH₂O]																			
PRU250/2	71	0,37	2800	56	90	89	87	85	83	81	79	73												
PRU280/2	71	0,55	2800	59		114	113	112	111	110	108	105	100	95	91									
PRU310/2	80	1,1	2845	60					152	152	151	151	149	148	147	145	142	135						
PRU350/2	90	2,2	2920	64								196	194	193	192	191	190	188	185	179				
PRU400/2	100	3	2930	68												251	249	248	248	247	242			
PRU400/2	112	4	2940	68												251	249	248	248	247	242	236	228	223
PRU450/2R	132	5,5	2940	71															299	295	290	285	278	270
PRU450/2	132	5,5	2940	67																329	325	322	316	310
PRU450/2	132	7,5	2940	73																329	325	322	316	310
PRU500/2R	132	7,5	2940	68																		372	368	364
PRU500/2	132	9,2	2940	69																			401	399
PRU500/2	160	11	2960	74																			409	406
PRU560/2R	160	15	2960	74																				
PRU560/2	160	15	2960	70																				
PRU560/2	160	18,5	2960	77																				
PRU630/2R	180	22	2960	74																				
PRU630/2R	200	30	2960	78																				
PRU630/2	200	30	2960	74																				
PRU630/2	200	37	2960	79																				
PRU710/2R	225	45	2970	75																				
PRU710/2R	250	55	2970	80																				
PRU710/2	250	55	2970	76																				
PRU710/2	280	75	2970	82																				
PRU800/2R	280	90	2970	82																				
PRU800/2	315	110	2970	83																				
PRU500/4	90	1,1	1415	56													96	95	93	91	87	83		
PRU560/4	100	2,2	1420	60																119	117	116	115	112
PRU630/4	112	4	1440	63																		151	150	149
PRU710/4R	132	5,5	1460	66																				
PRU710/4	132	7,5	1470	68																				
PRU800/4R	160	11	1470	69																				
PRU800/4	160	15	1470	71																				
PRU900/4R	180	18,5	1470	73																				
PRU900/4R	180	22	1470	73																				
PRU900/4	200	30	1470	74																				
PRU1000/4R	225	37	1470	75																				
PRU1000/4	225	45	1470	77																				
PRU1120/4R	250	55	1475	76																				
PRU1120/4	280	75	1480	79																				
PRU1250/4R	315	110	1485	80																				
PRU1250/4	315	132	1485	81																				
PRU1400/4R	315	200	1490	82																				
PRU1400/4	315	250	1490	84																				
PRU800/6	132	4	950	63																				
PRU900/6	160	7,5	960	63																				
PRU1000/6R	160	11	980	66																				
PRU1000/6	180	15	980	67																				
PRU1120/6R	200	18,5	980	67																				
PRU1120/6	200	22	980	70																				
PRU1250/6R	225	30	980	71																				
PRU1250/6	250	37	980	72																				
PRU1400/6R	280	45	980	74																				
PRU1400/6	315	75	980	75																				



■ The A-weighted sound power level, L_{pA} (Chap.14), is the value measured in test conditions at the point of maximum noise level.








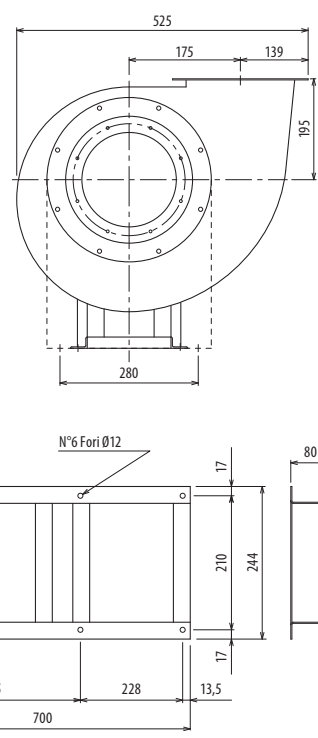
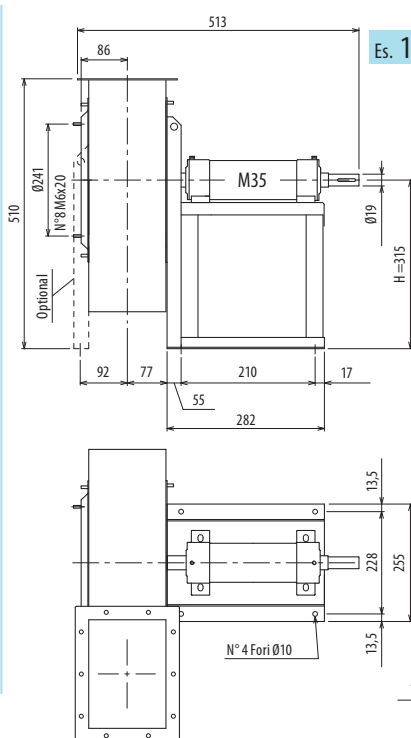
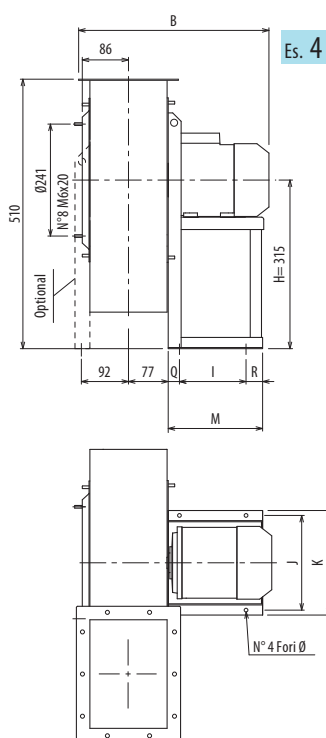


The fan is revolvable - The weight indicated in the table includes motor

Type		Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	J	K	M	Q	R	Ø
Fan	Motor													
PRU250/2	71 A2	28	0,10	396	121	315	195	315	203	225	195	48	26	10
PRU250/T		30	0,10			315	195	315						

Further information and sizes:

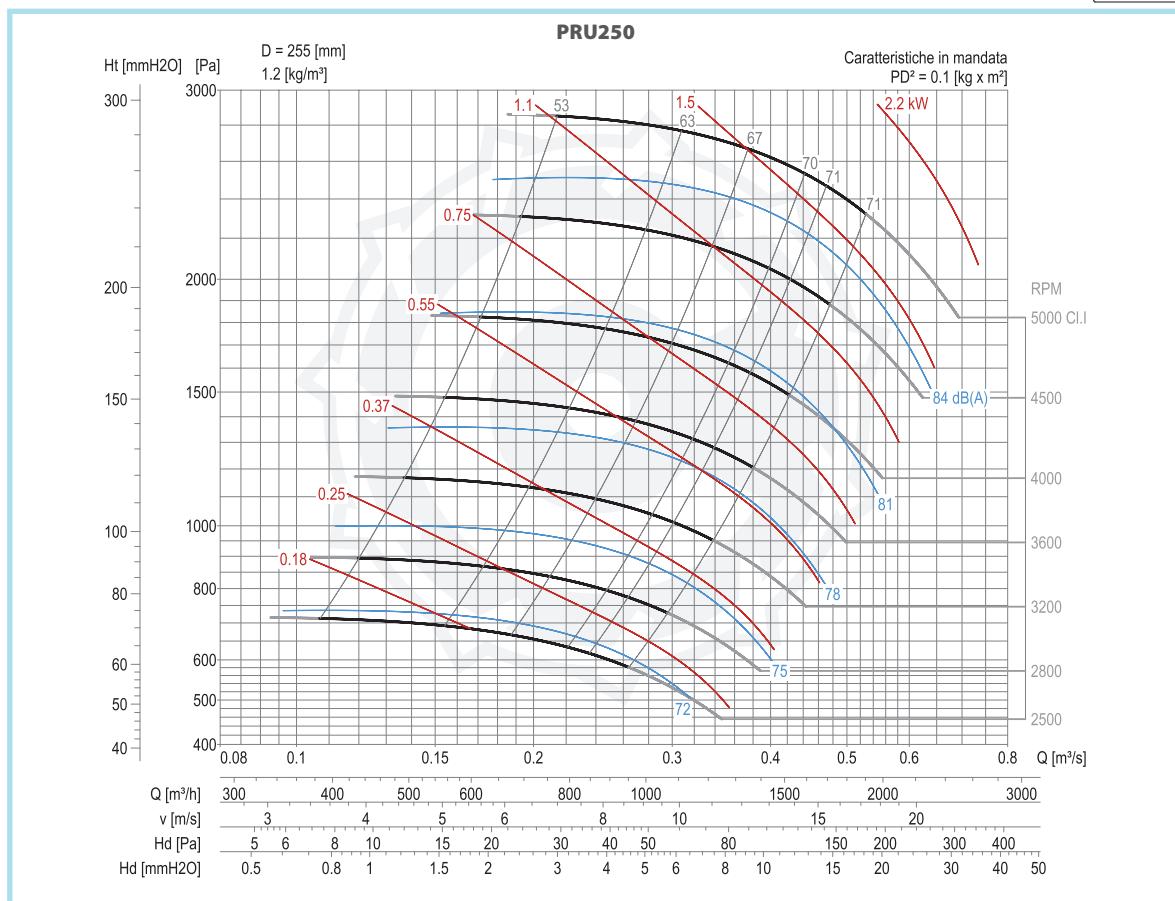



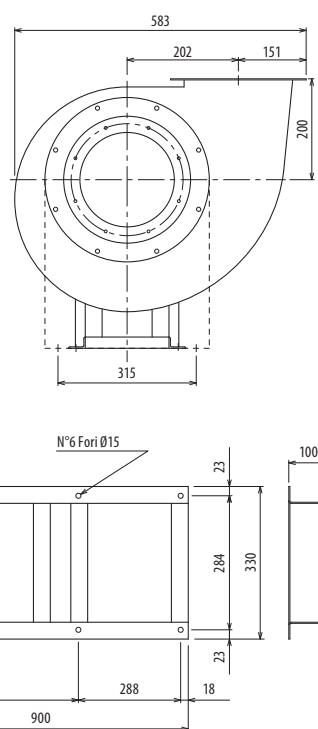
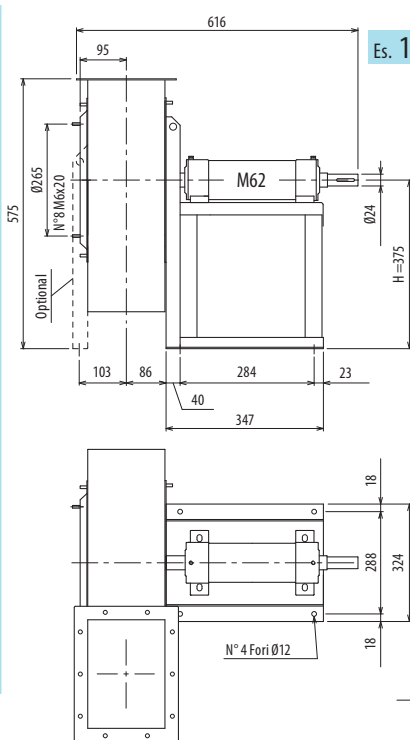
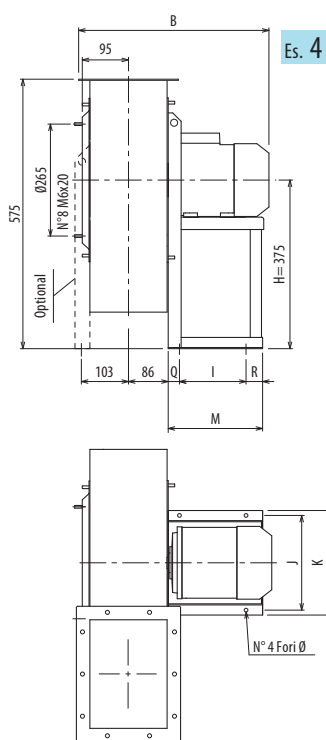


The fan is revolvable - The weight indicated in the table includes motor

Type		Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	J	K	M	Q	R	Ø
Fan	Motor													
PRU280/2	71 B2	30	0,13	414	121	375	200	375	203	225	195	48	26	10
PRU280/T		37	0,13			375	200	375						

Further information and sizes:








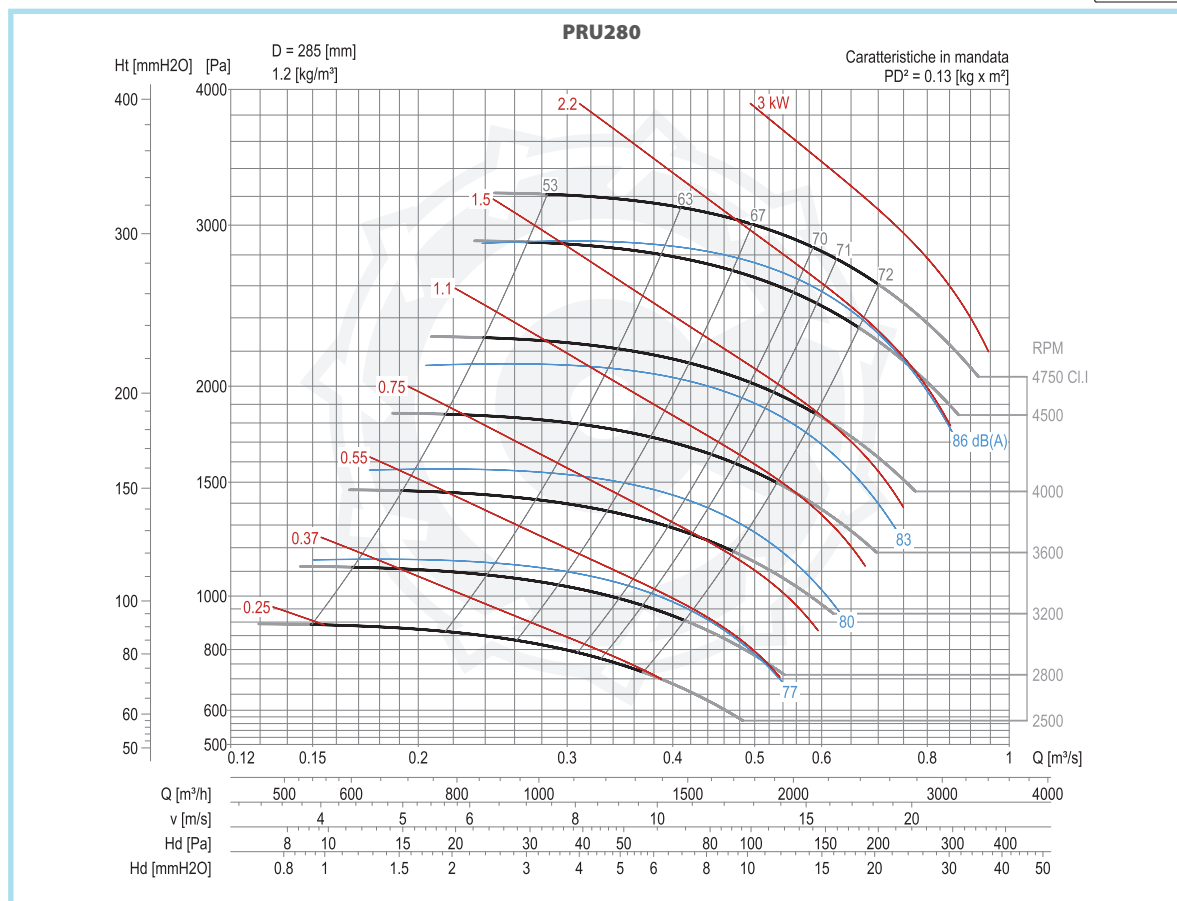



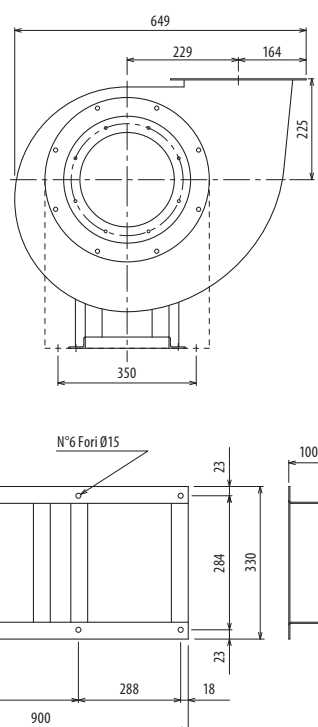
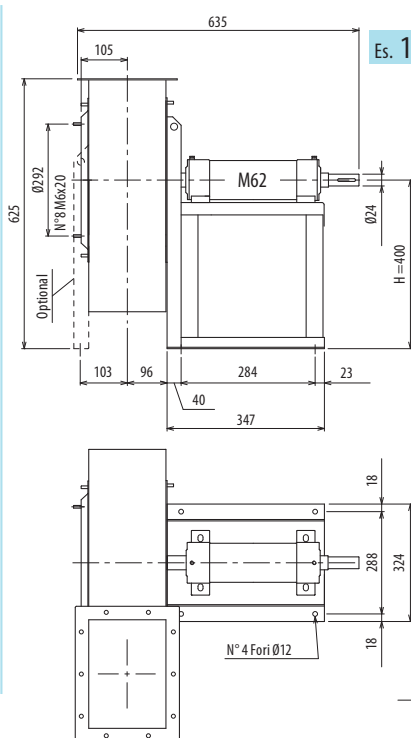
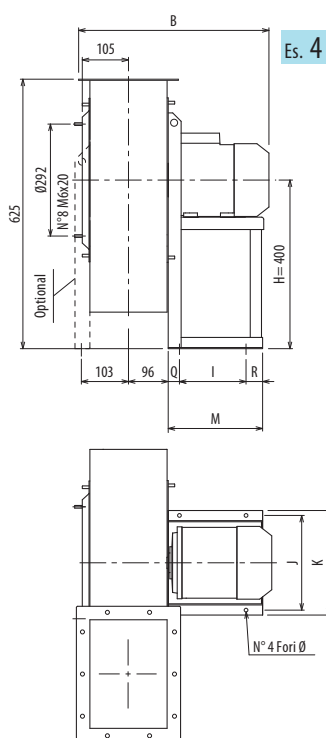


The fan is revolable - The weight indicated in the table includes motor

Type		Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	J	K	M	Q	R	Ø
Fan	Motor													
PRU310/2	80 B2	42	0,24	458	121	400	225	400	203	225	217	48	48	10
PRU310/T		55	0,24			400	225	400						

Further information and sizes:

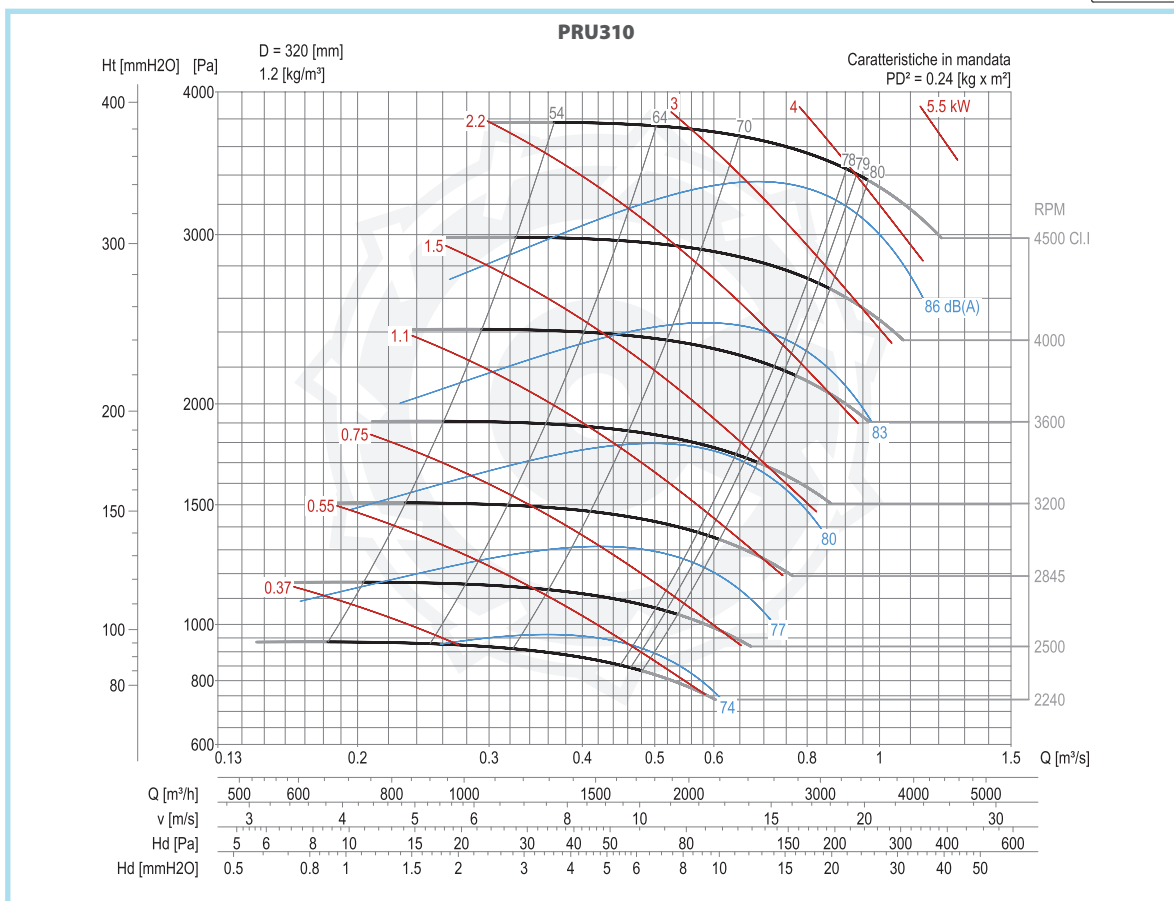







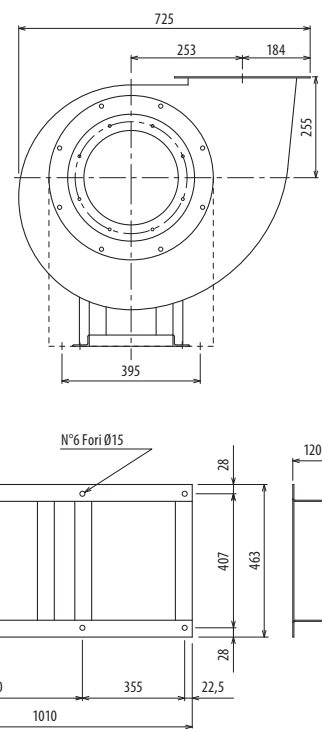
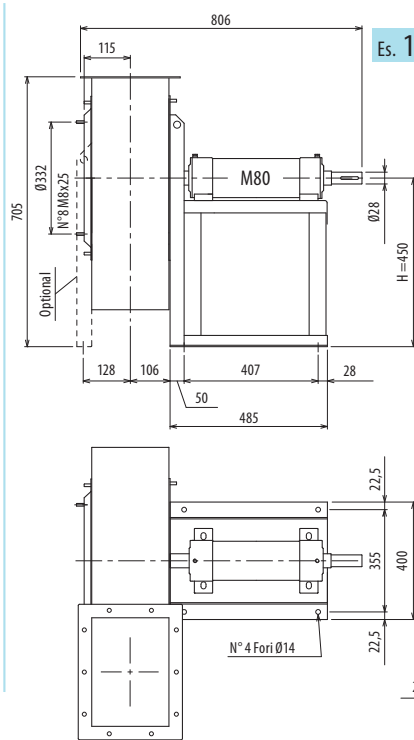
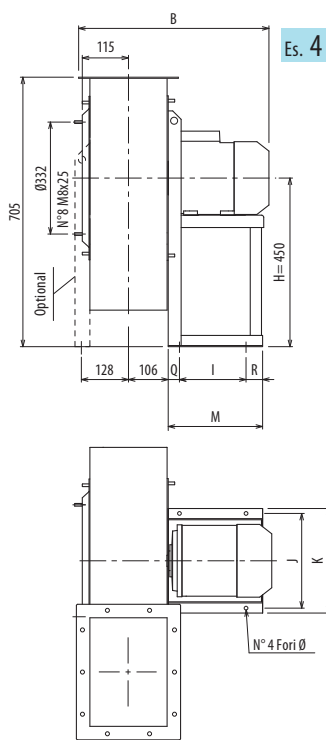


The fan is revolable - The weight indicated in the table includes motor

Type		Weight Kg	PD ² Kg x m ²	B	I	H	H1	H2	J	K	M	Q	R	Ø
Fan	Motor													
PRU350/2	90 L2	62	0,41	530	133	450	255	450	234	260	251	58	60	10
PRU350/T		72	0,41			450	255	450						

Further information and sizes:





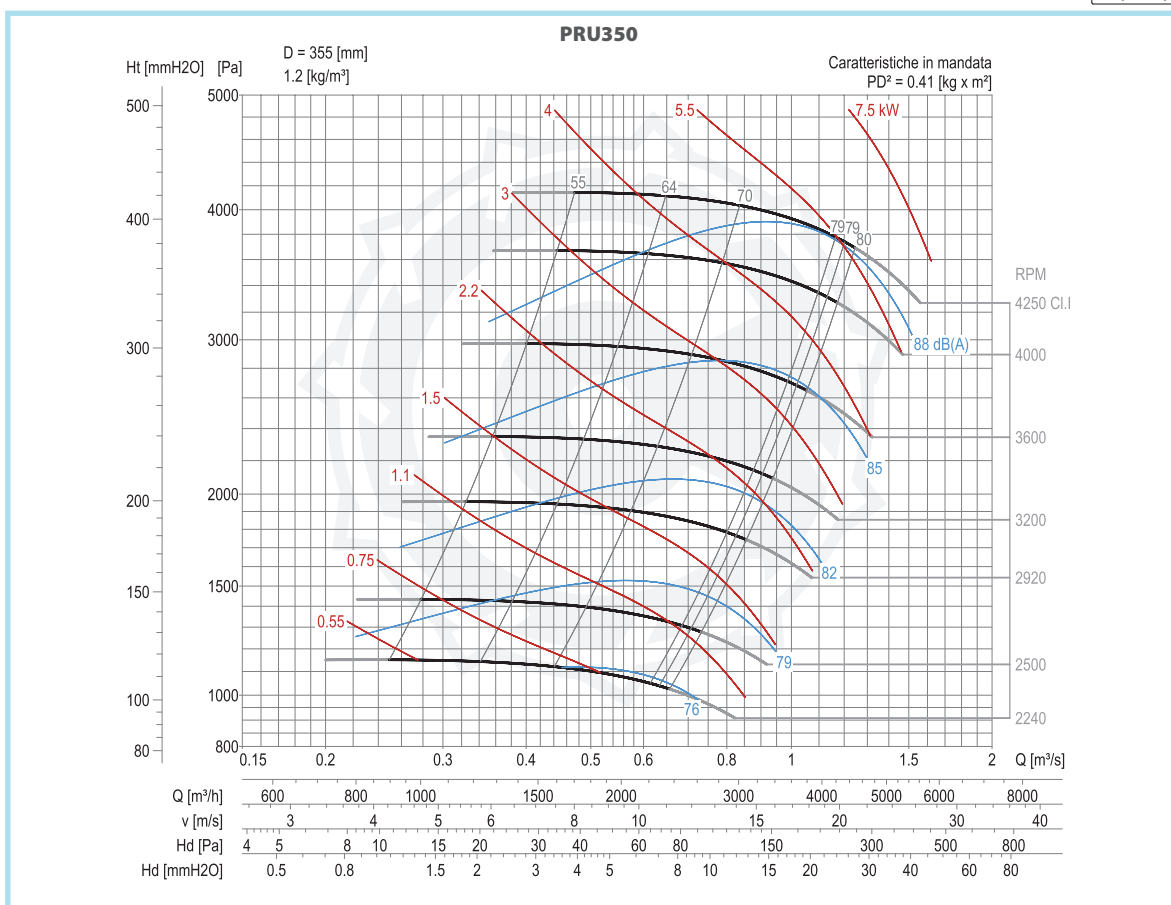
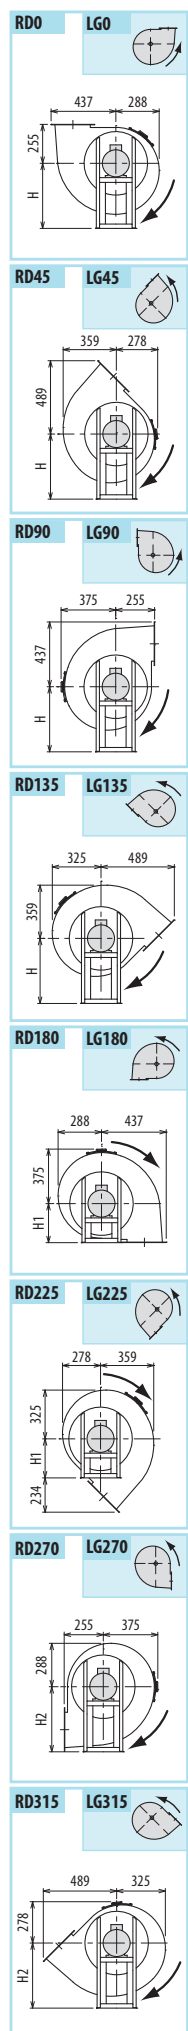



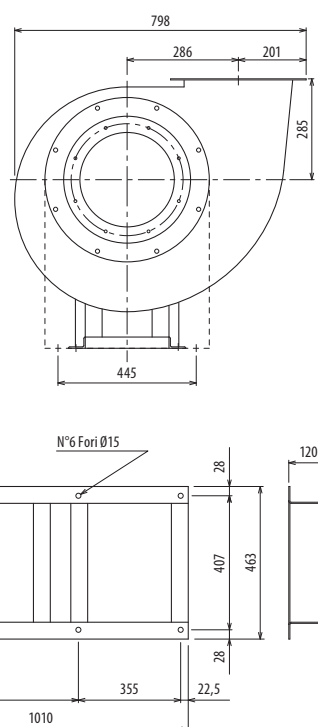
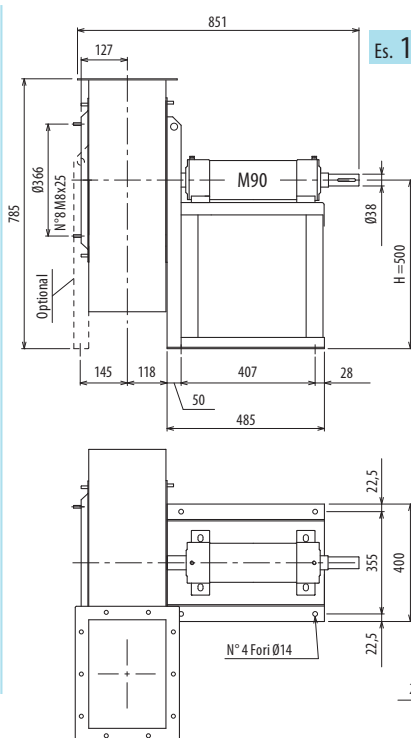
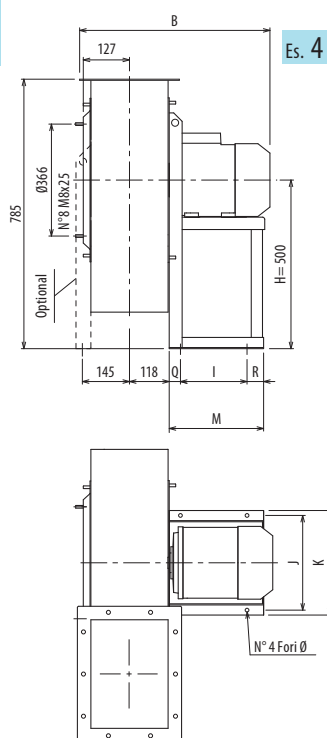


The fan is revolvable · The weight indicated in the table includes motor

Type		Weight	PD²	B	I	H	H1	H2	J	K	M	Q	R	Ø	
Fan	Motor														
PRU400/2	100 L2	82	0,73	580	197	500	285	500	289	324	283	34	52	12	
PRU400/2	112 M2	90	0,73	606	197	500	285	500	289	324	286	35	54	12	
PRU400/T		82	0.73			500	285	500							

Further information and sizes:








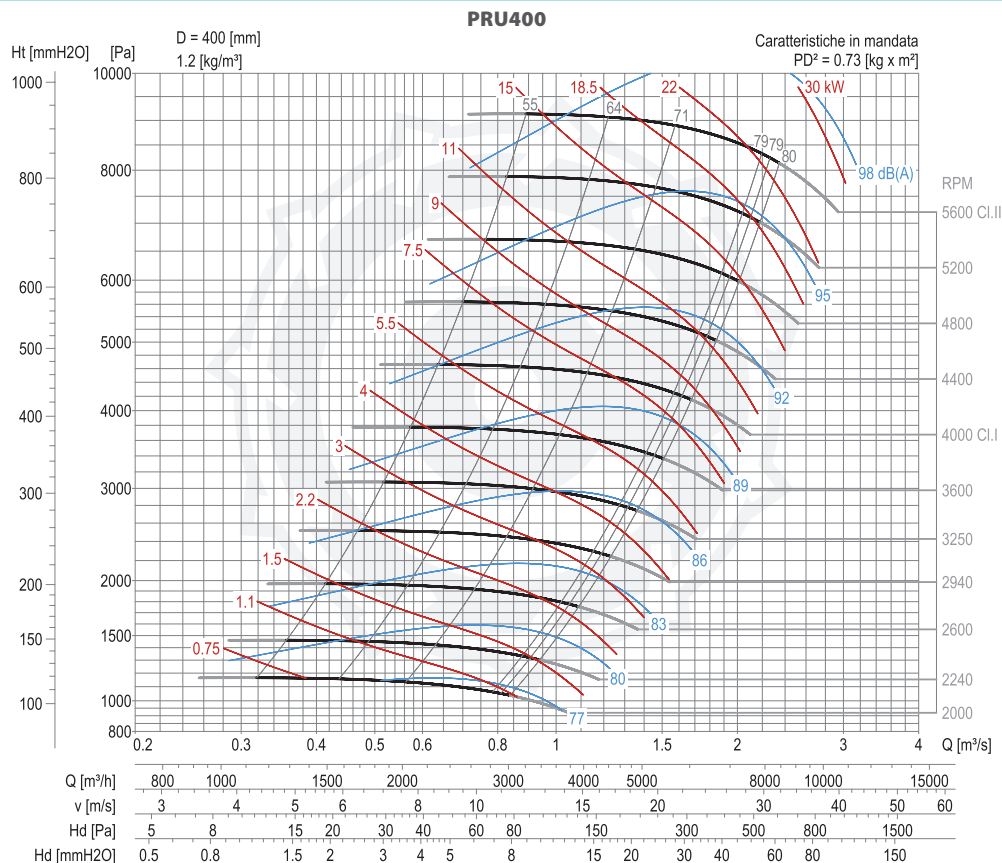



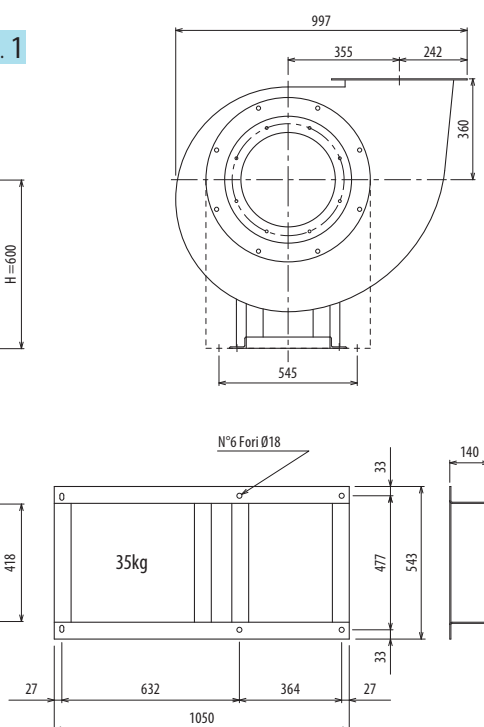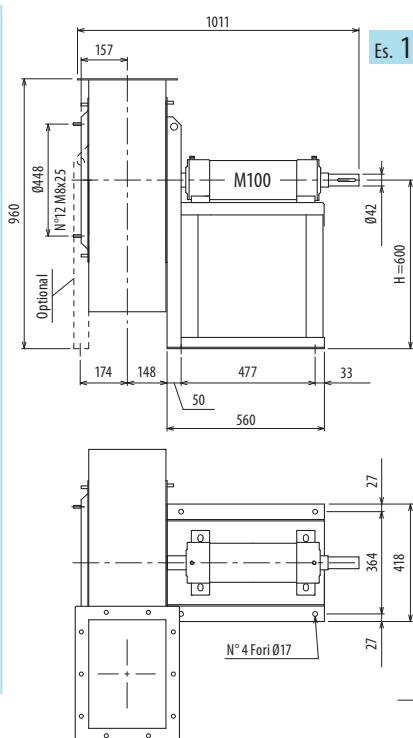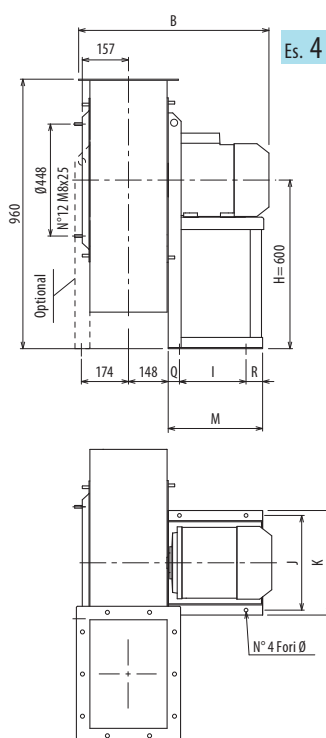


The fan is revolvable - The weight indicated in the table includes motor


Type		Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	J	K	M	Q	R	Ø
Fan	Motor													
PRU500/2R	132 SB2	141	2,1	705	237	600	360	600	337	372	345	44	64	12
PRU500/2	132 M2	149	2,2	705	237	600	360	600	337	372	345	44	64	12
PRU500/2	160 MA2	175	2,2	810	337	600	360	600	395	440	446	55	54	14
PRU500/4	90 S4	100	2,3	613	133	600	360	600	234	260	251	58	60	10
PRU500/T		135	2,20			600	360	600						

Further information and sizes:

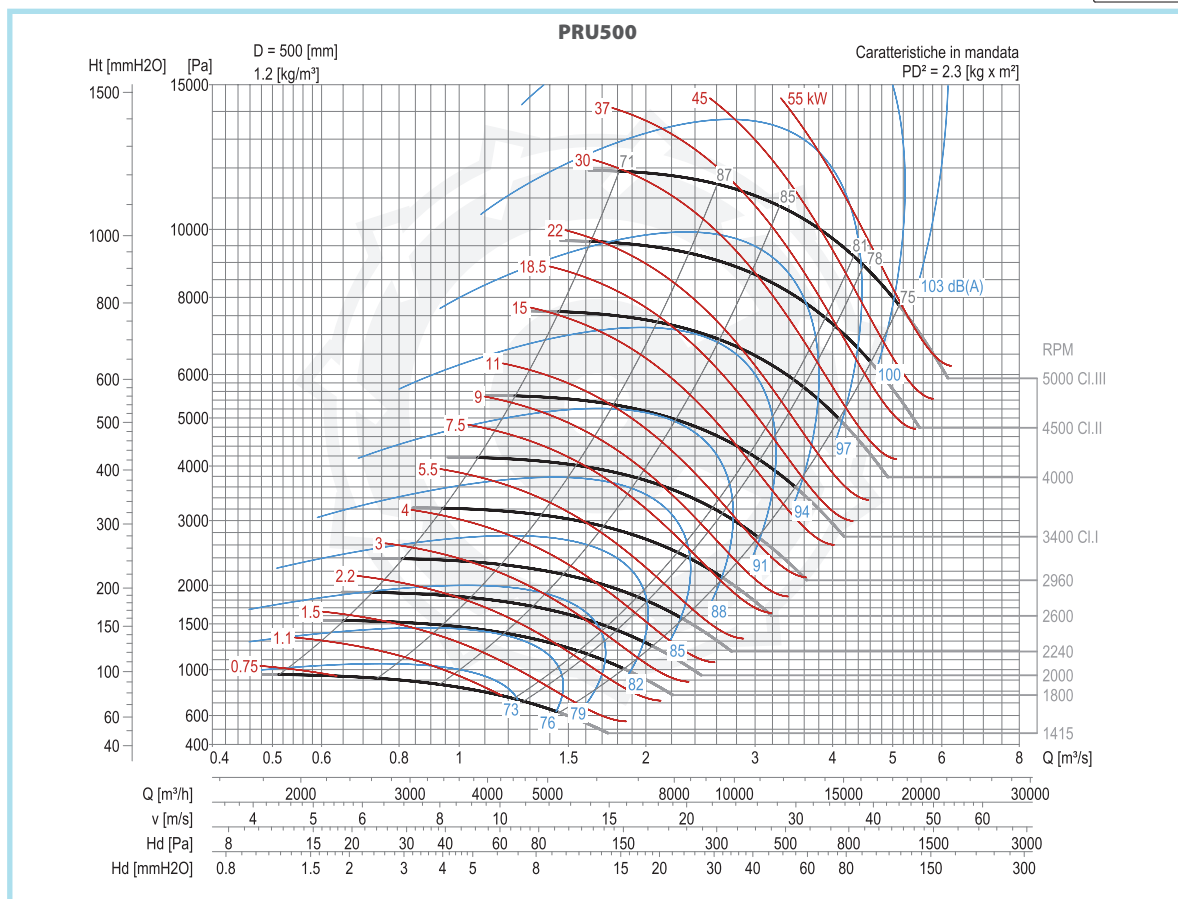


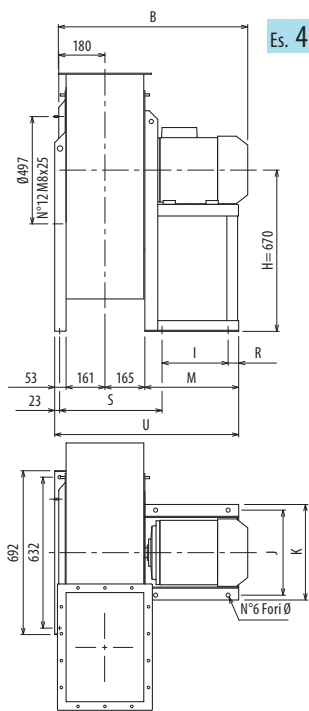

Es. 4

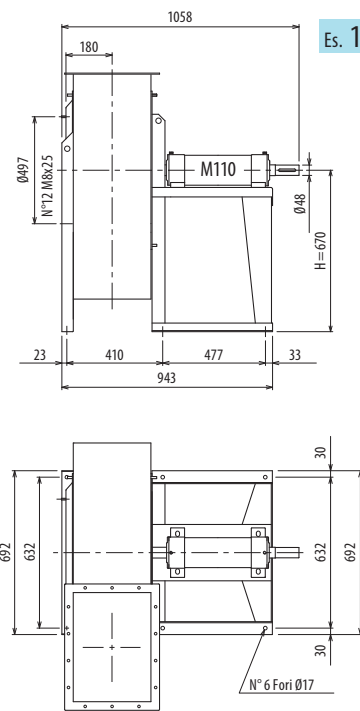

Es. 1

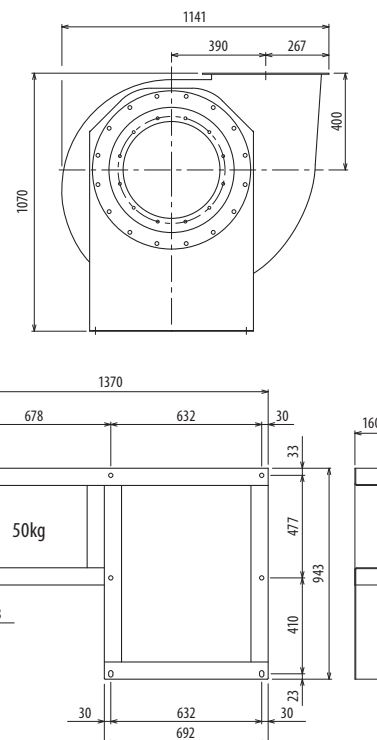










The fan is revolvable - The weight indicated in the table includes motor


Type		Weight Kg	PD ² Kg x m ²	B	I	H	H1	H2	J	K	M	R	S	U	Ø
Fan	Motor														
PRU560/2R	160 MB2	217	3,4	857	337	670	400	670	395	440	446	54	406	820	14
PRU560/2	160 MB2	218	3,8	857	337	670	400	670	395	440	446	54	406	820	14
PRU560/2	160 L2	228	3,8	857	337	670	400	670	395	440	446	54	406	820	14
PRU560/4	100 L4	143	3,2	691	197	670	400	670	289	324	281	54	386	660	12
PRU560/T		182	3,8			670	400	670							

Further information and sizes:


pg. / S.
4,6

pg. / S.
4,5

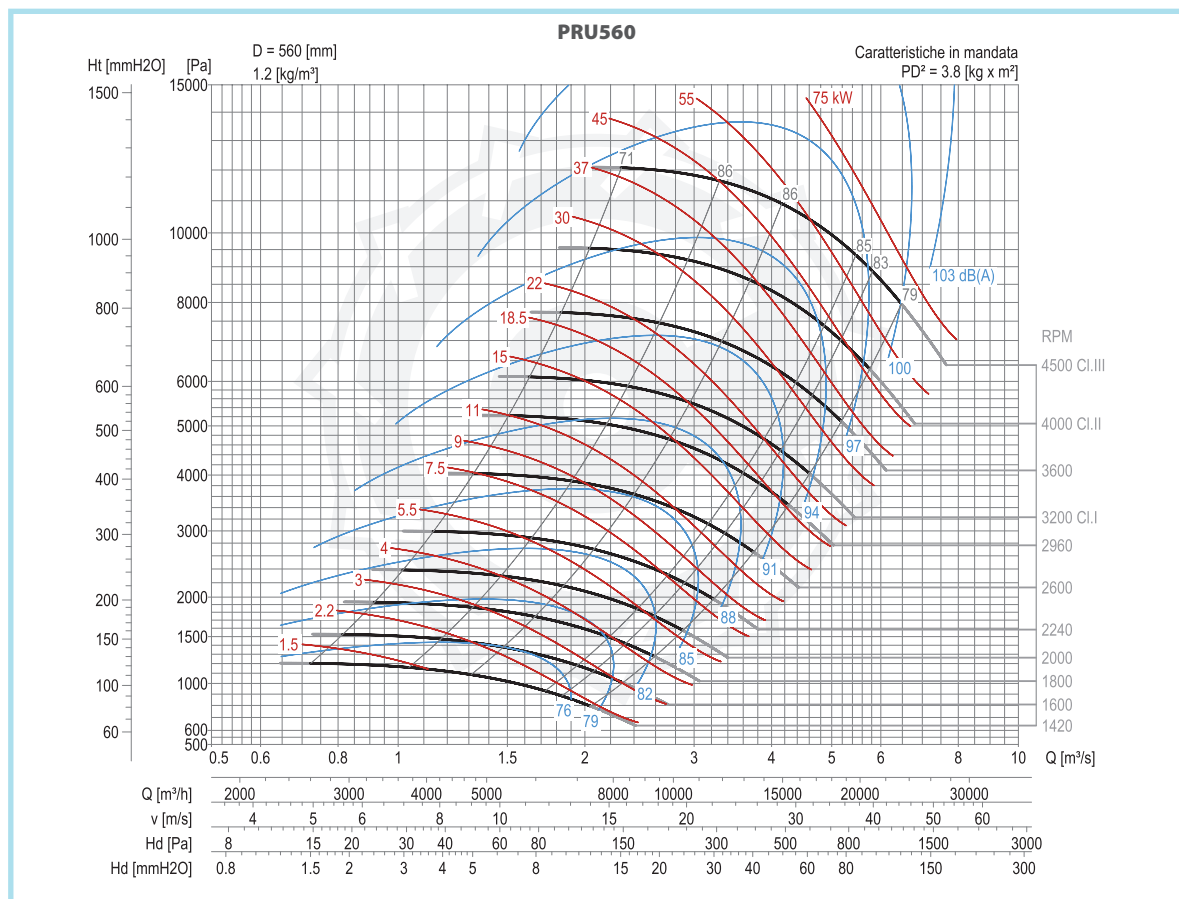


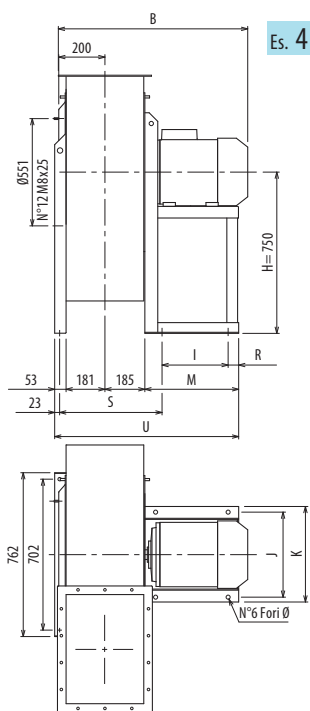

Es. 4

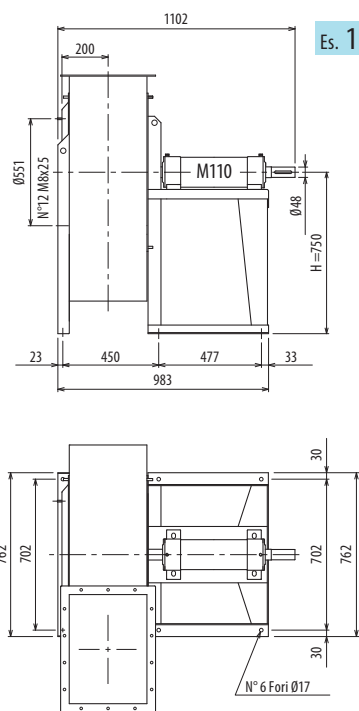









Es. 1

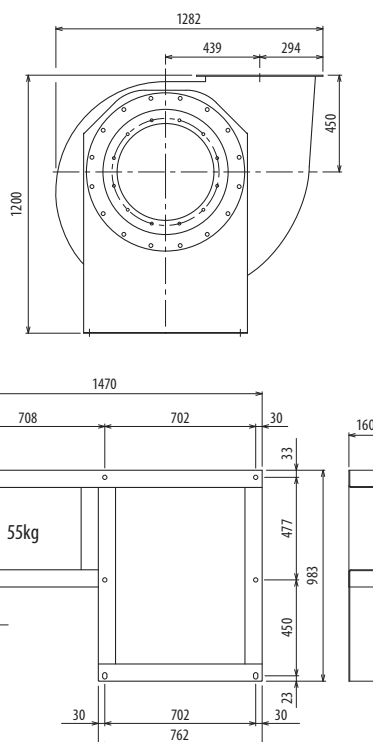


The fan is revolvable - The weight indicated in the table includes motor


Type		Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	J	K	M	R	S	U	Ø
Fan	Motor														
PRU630/2R	180 M2	375	5,5	1021	357	750	450	750	434	488	465	38	466	884	18
PRU630/2R	200 LA2	438	5,5	1086	381	750	450	750	506	568	509	48	475	927	20
PRU630/2	200 LA2	443	7,1	1086	381	750	450	750	506	568	509	48	475	927	20
PRU630/2	200 LB2	443	7,1	1086	381	750	450	750	506	568	509	48	475	927	20
PRU630/4	112 M4	190	6,6	752	197	750	450	750	289	324	285	54	425	699	12
PRU630/T		218	7,1			750	450	750							

Further information and sizes:

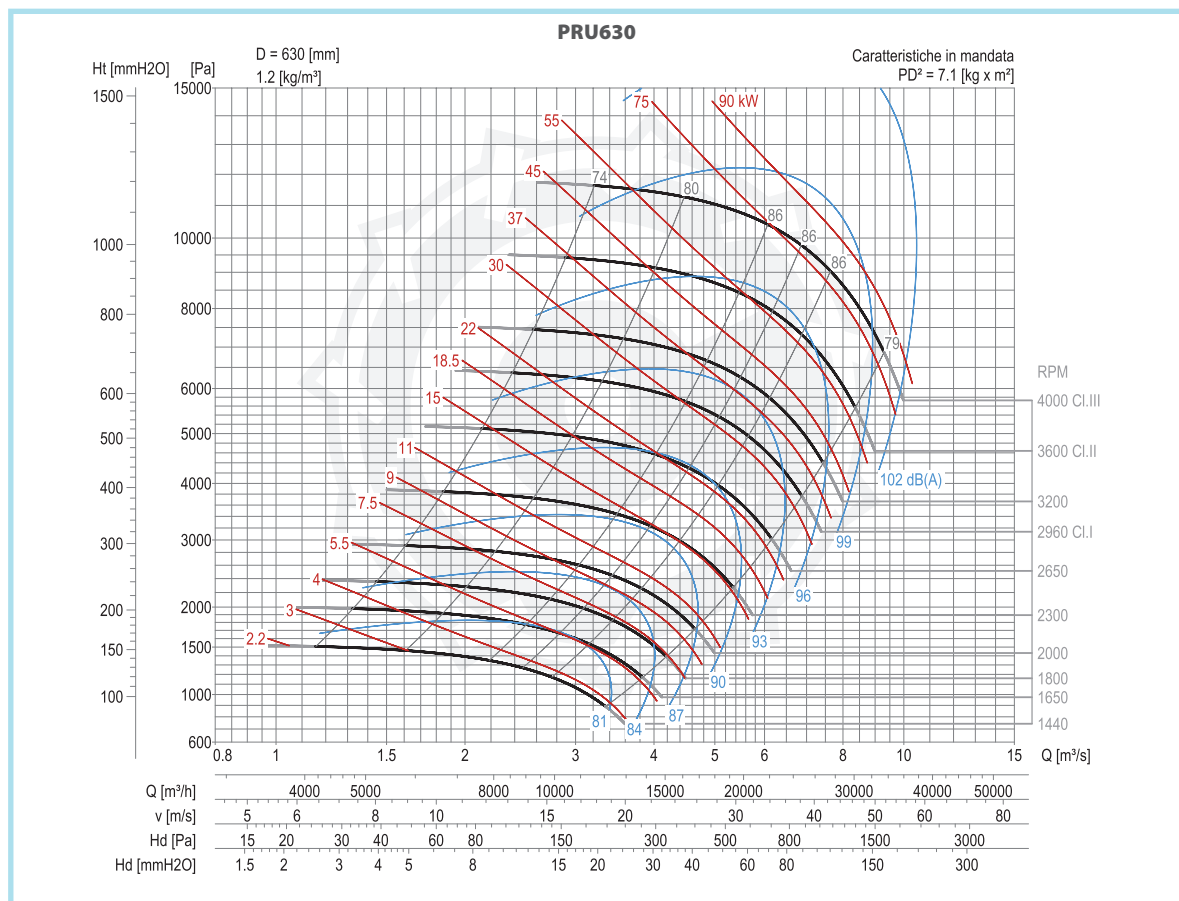


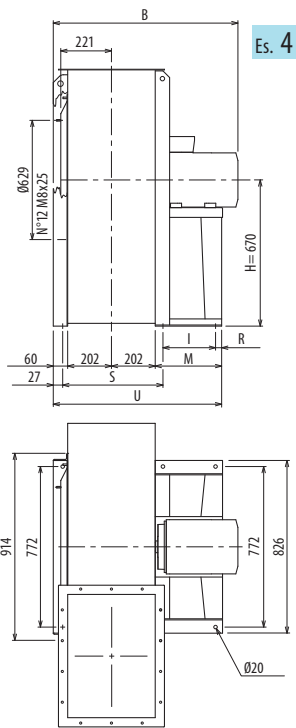

Es. 4

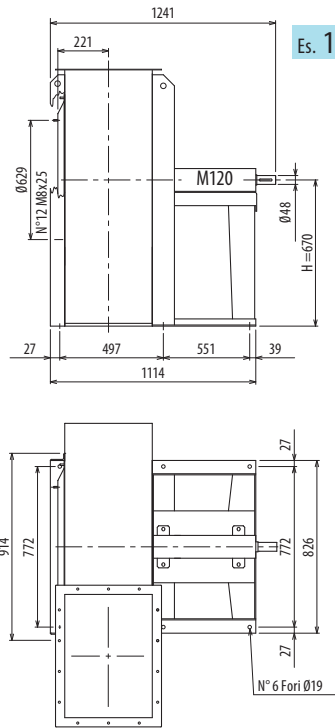

Es. 1

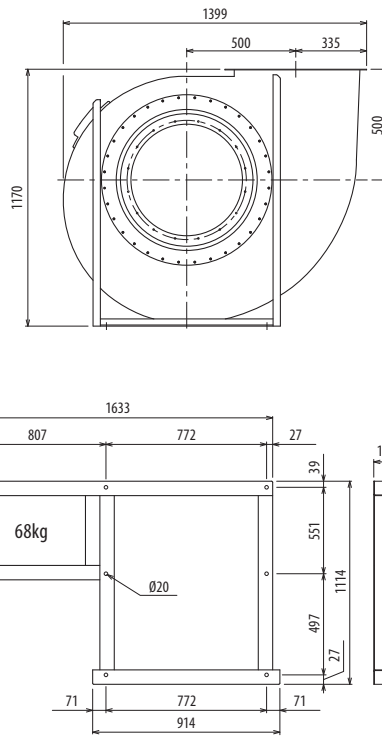




The fan is not revolable - The weight indicated in the table includes motor


Further information and sizes

TIPO • Type		PESO Weight	PD ²	B	I	H	H1	H2	R	S	M	U			
VENTILATORE Fan	MOTORE Motor														
PRU710/2R	225 M2	540	10	1173	441	670	500	850	39	497	540	1004			
PRU710/2R	250 M2	625	10	1281	501	670	500	850	39	497	600	1064			
PRU710/2	250 M2	626	11	1281	501	670	500	850	39	497	600	1064			
PRU710/2	280 S2	760	11	1284	591	670	500	850	39	497	690	1154			
PRU710/4R	132 S4	275	10	837	201	670	500	850	75	497	336	800			
PRU710/4	132 M4	288	11	837	201	670	500	850	75	497	336	800			
PRU710/T		325	11			670	500	850							


pg. / S. 4,6

pg. / S. 4,5

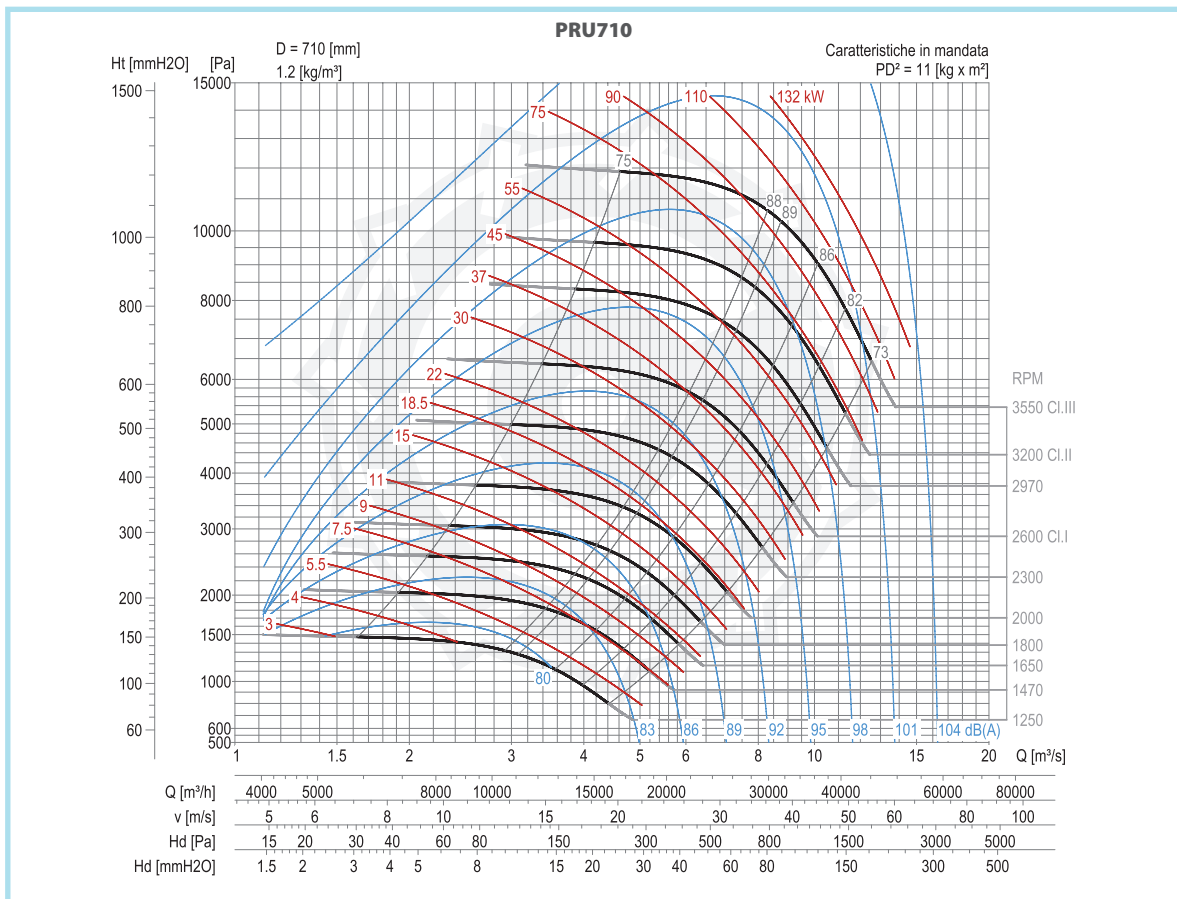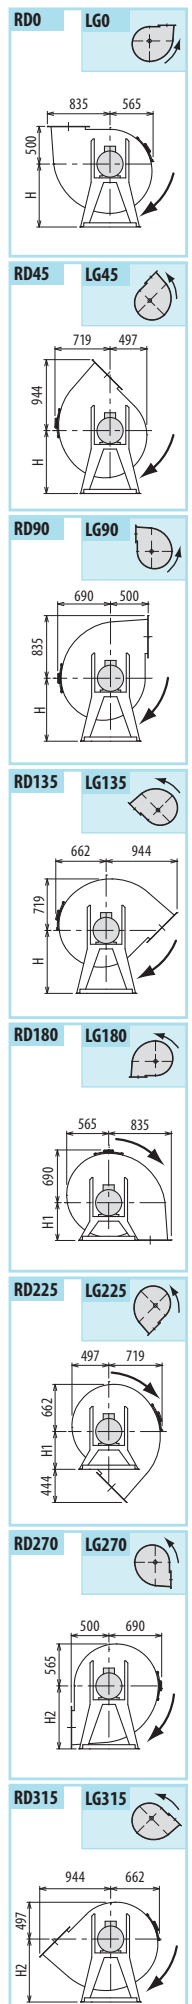


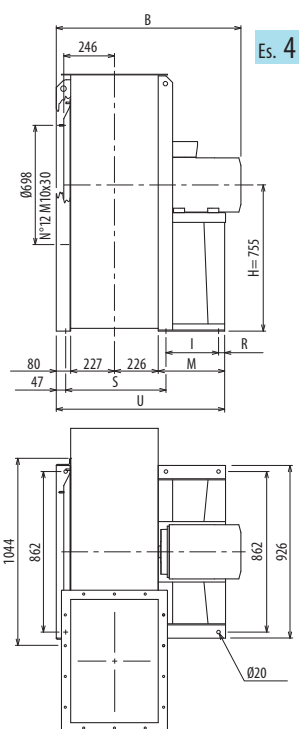

Es. 4

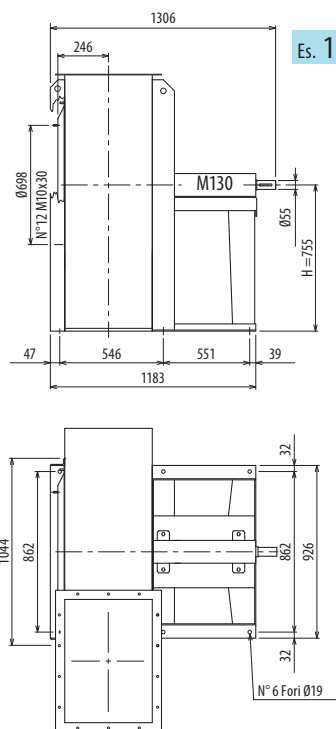




Es. 1

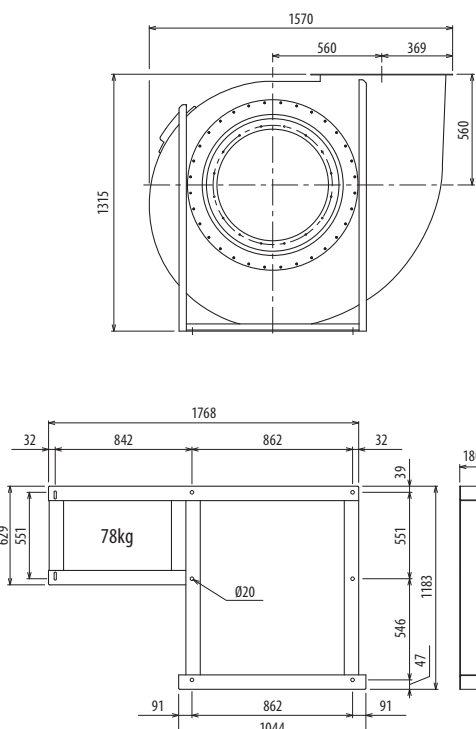

The fan is not revolable - The weight indicated in the table includes motor

Further information and sizes

Type		Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	R	S	M	U
Fan	Motor											
PRU800/2R	280 M2	904	18	1353	591	755	560	950	39	546	690	1223
PRU800/2	315 S2	1046	20	1565	675	755	560	950	65	546	800	1333
PRU800/4R	160 M4	418	18	1011	315	755	560	950	60	546	436	968
PRU800/4	160 L4	432	20	1011	315	755	560	950	60	546	436	968
PRU800/6	132 M6	390	19	906	201	755	560	950	75	546	336	869
PRU800/T		400	20			755	560	950				

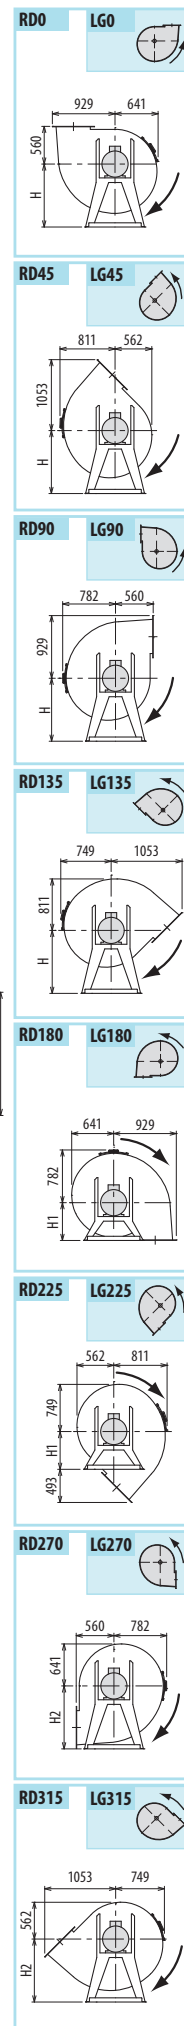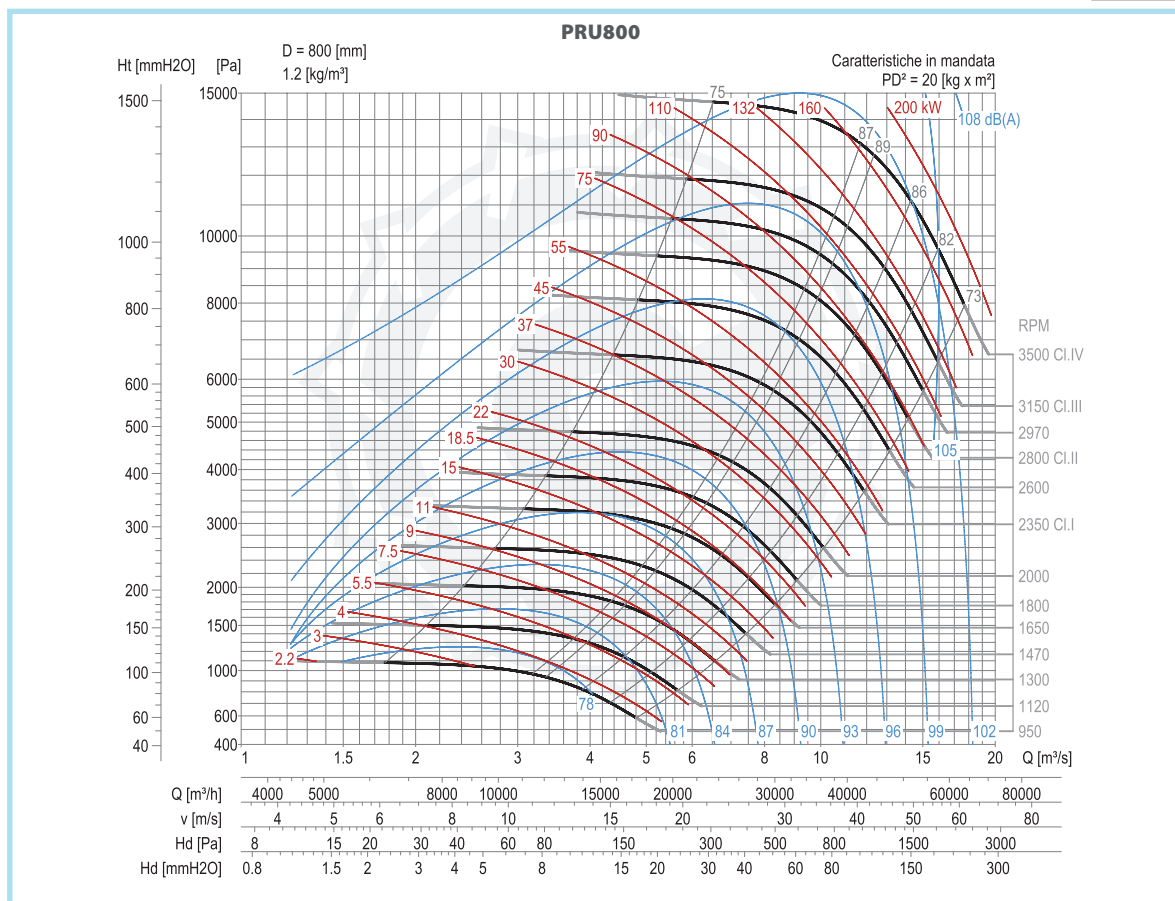

Technical drawing of the M130 machine, showing front and side views with dimensions.

Front View Dimensions:

- Overall width: 1360
- Distance from left edge to start of main body: 277
- Height of main body: $\varnothing 775$
- Height of main body (N°16 M10x30): N°16 M10x30
- Distance from left edge to start of main body (bottom): 47
- Distance from left edge to start of main body (bottom): 600
- Distance from left edge to start of main body (bottom): 1237
- Distance from left edge to start of main body (bottom): 551
- Distance from left edge to start of main body (bottom): 39
- Height of main body (bottom): $\varnothing 55$
- Height of main body (bottom): H=850

Side View Dimensions:

- Overall height: 1144
- Distance from top edge to start of main body: 962
- Distance from top edge to start of main body: 32
- Distance from top edge to start of main body: 1026
- Distance from top edge to start of main body: 962
- Distance from top edge to start of main body: 32
- Distance from top edge to start of main body: N° 6 Fori $\varnothing 19$

Technical drawing of the 89 kg weight stack assembly, showing front and side views with dimensions.


Front View Dimensions:

- Overall width: 1758
- Distance from center to the right edge of the stack: 630
- Distance from the center to the right edge of the frame: 408
- Overall height: 1480
- Distance from the top of the stack to the top of the frame: 630


Side View Dimensions:

- Overall width: 2013
- Distance from the left edge to the center of the stack: 987
- Distance from the center of the stack to the right edge of the frame: 962
- Distance from the right edge of the frame to the right edge of the stack: 32
- Distance from the top of the stack to the top of the frame: 39
- Distance from the top of the frame to the top of the weight stack: 551
- Distance from the top of the weight stack to the top of the base: 600
- Distance from the top of the base to the top of the frame: 47
- Overall height: 1237
- Weight: 89 kg
- Pin diameter: $\varnothing 20$
- Distance from the left edge to the center of the stack: 91
- Distance from the center of the stack to the right edge of the frame: 962
- Distance from the right edge of the frame to the right edge of the stack: 91
- Overall width: 1144


RDO	LGO	
------------	------------	---




RD45 LG45




RD90	LG90	
------	------	---




RD135 LG135




RD180 LG180




RD225 LG225 



RD270 LG270







RD315 LG315




Further information and sizes

Type		Weight	PD ²	B	I	H	H1	H2	R	S	M	U			
Fan	Motor														
PRU900/4R	180 M4	590	34	1146	361	850	630	1060	39	600	460	1047			
PRU900/4R	180 L4	605	34	1146	361	850	630	1060	39	600	460	1047			
PRU900/4	200 L4	687	37	1254	401	850	630	1060	39	600	500	1087			
PRU900/6	160 M6	504	36	1065	316	850	630	1060	60	600	436	1023			
PRU900/T		485	34			850	630	1060							

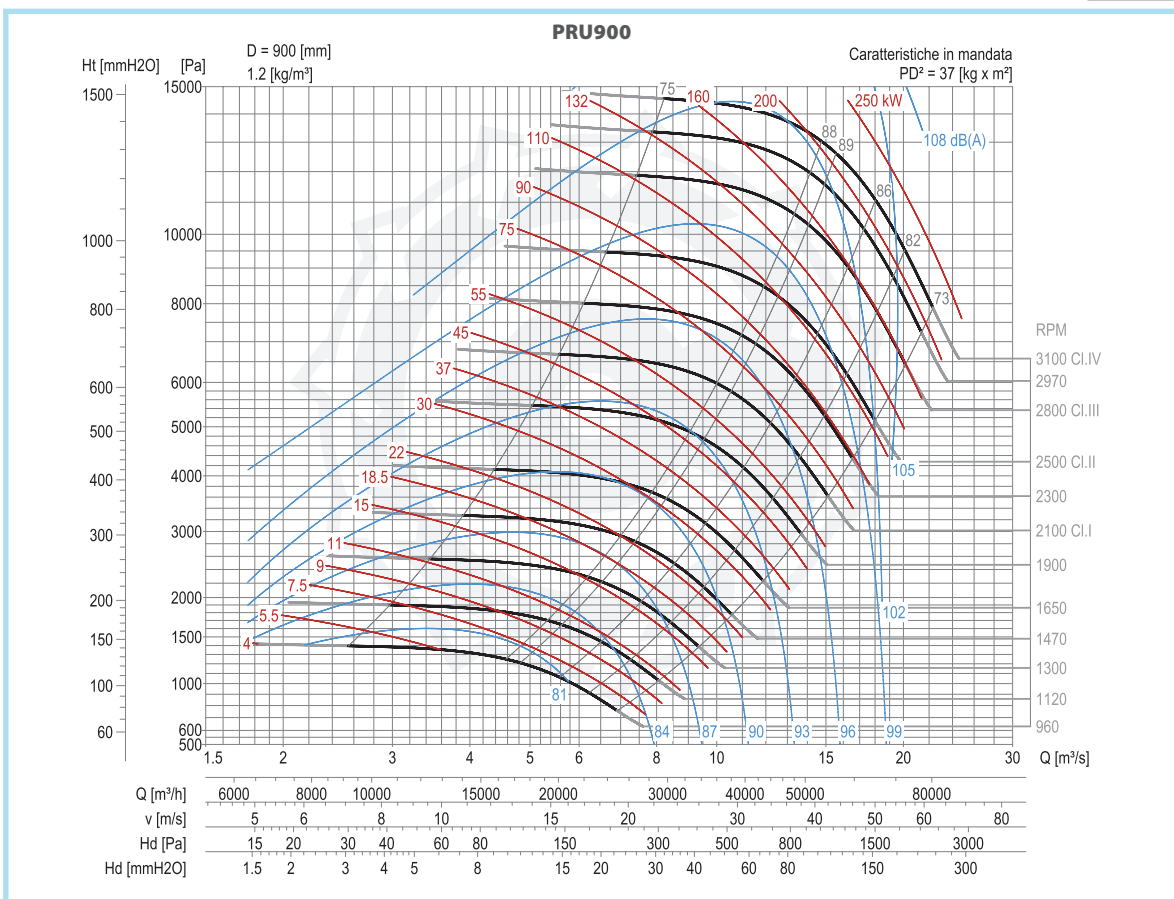
pg. / S.
4.6pg. / S.
4.5

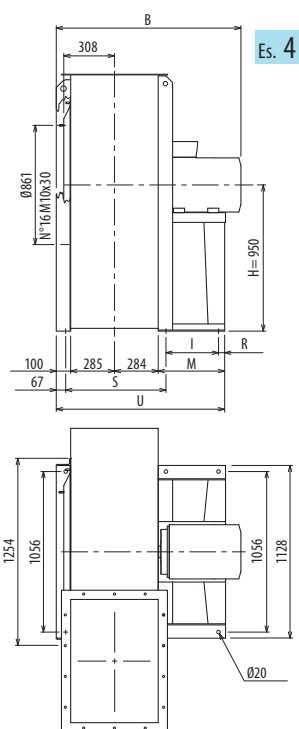

Es. 4

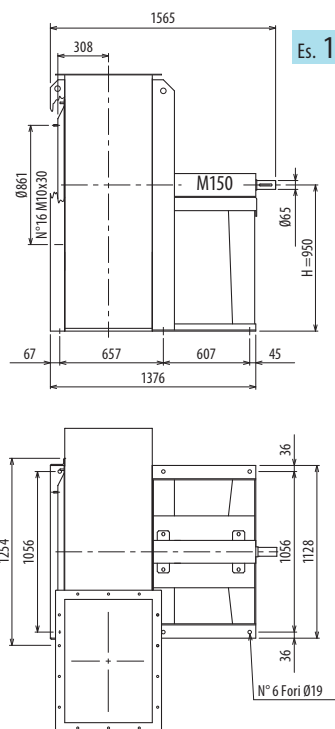









Es. 1

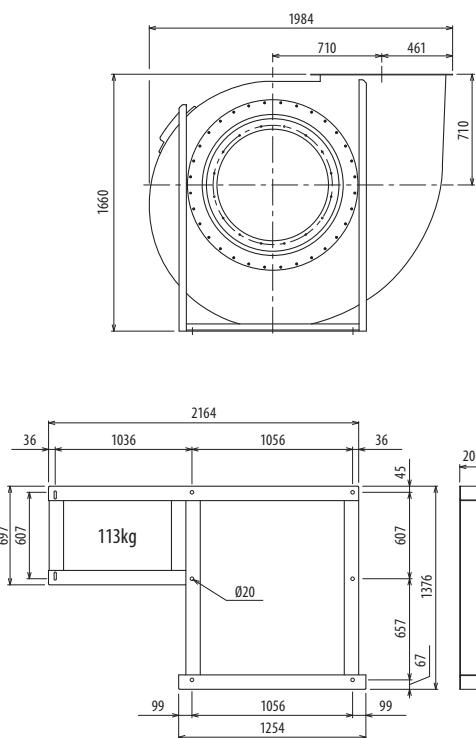


The fan is not revolable - The weight indicated in the table includes motor


Type		Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	R	S	M	U
Fan	Motor											
PRU1000/4R	225 S4	933	60	1318	440	950	710	1180	45	657	540	1209
PRU1000/4	225 M4	975	65	1378	440	950	710	1180	45	657	540	1209
PRU1000/6R	160 L6	684	58	1147	315	950	710	1180	66	657	436	1105
PRU1000/6	180 L6	759	62	1279	360	950	710	1180	45	657	460	1129
PRU1000/T		710	65			950	710	1180				

Further information and sizes

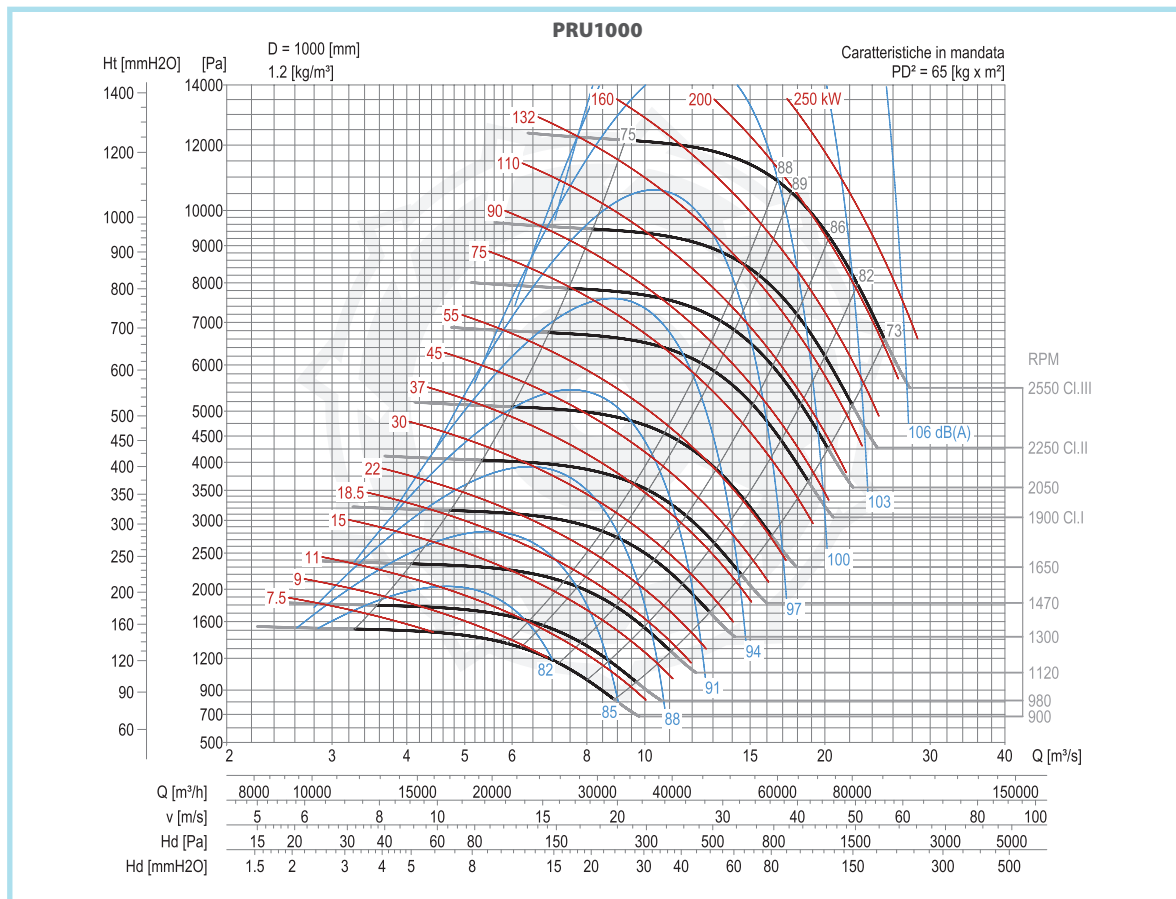


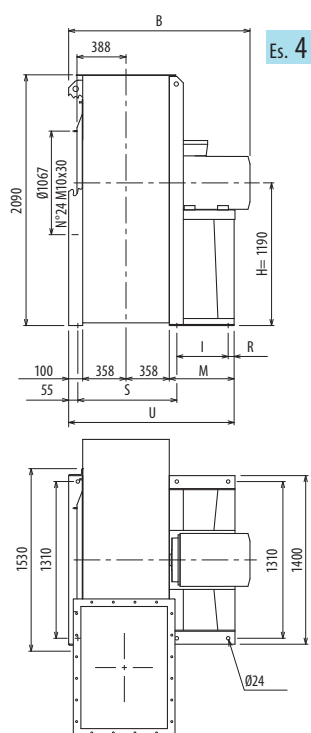

Es. 4

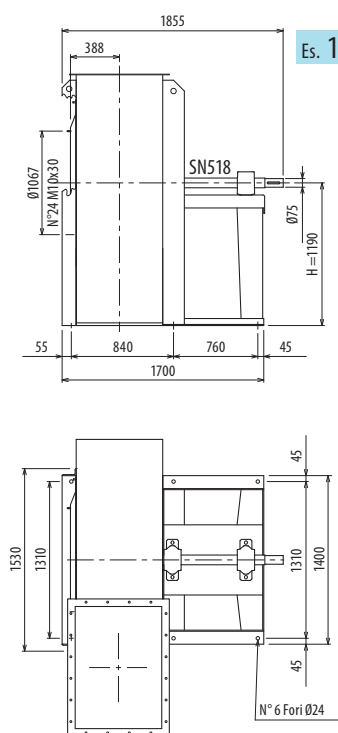




Es. 1




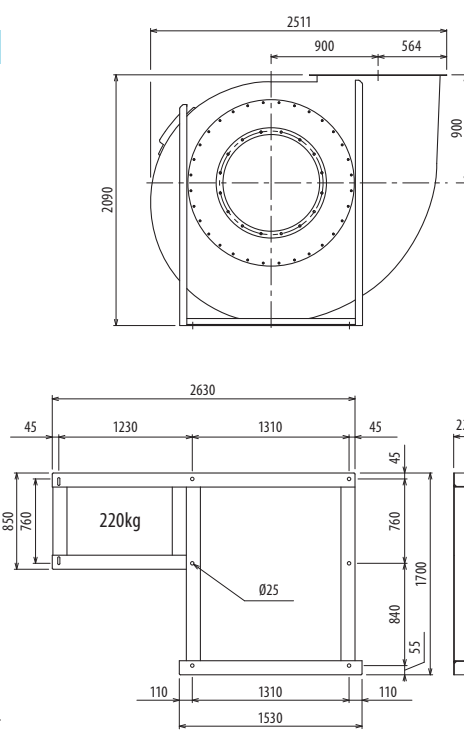


The fan is not revolvable • The weight indicated in the table includes motor

Type		Weight	PD ²	B	I	H	H1	H2	R	S	M	U			
Fan	Motor														
PRU1250/4R	315 S4	1860	210	1847	675	1190	900	1500	45	840	800	1615			
PRU1250/4	315 M4	2055	215	1847	675	1190	900	1500	45	840	800	1615			
PRU1250/6R	225 M6	1283	205	1524	415	1190	900	1500	45	840	540	1355			
PRU1250/6	250 M6	1378	210	1632	475	1190	900	1500	45	840	600	1415			
PRU1250/T		1145	214			1190	900	1500							

Further information and sizes

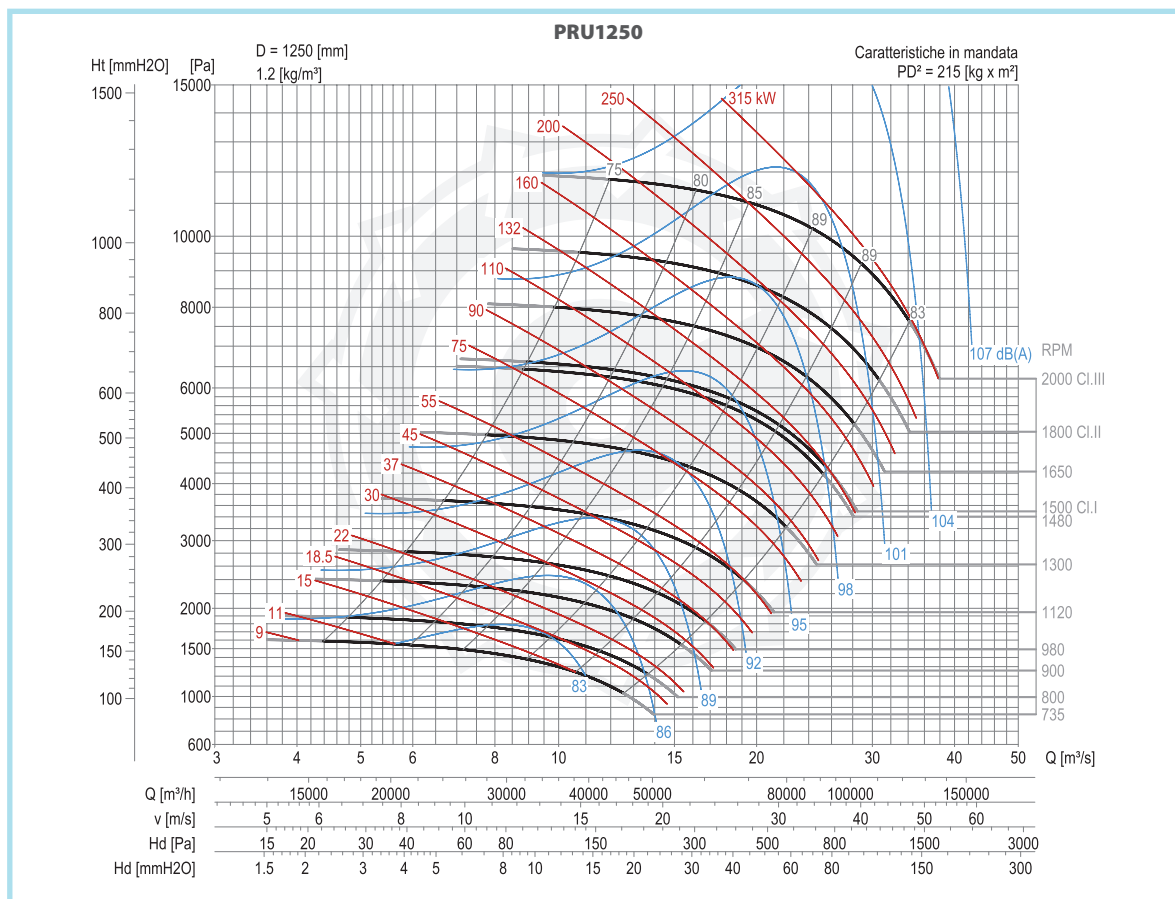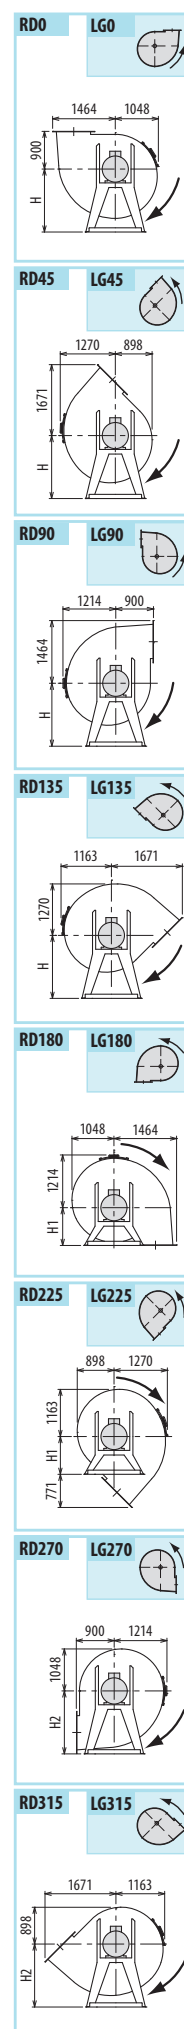



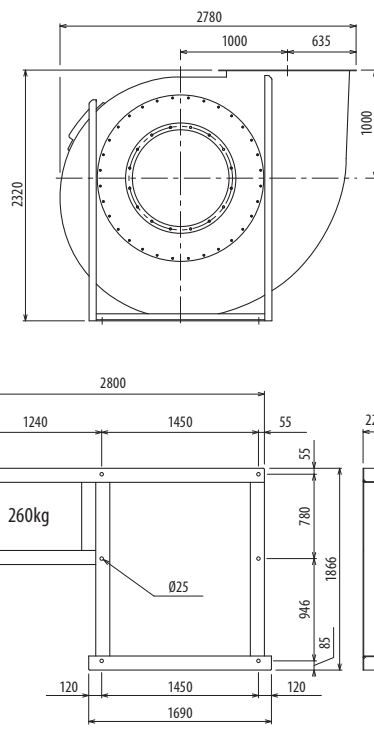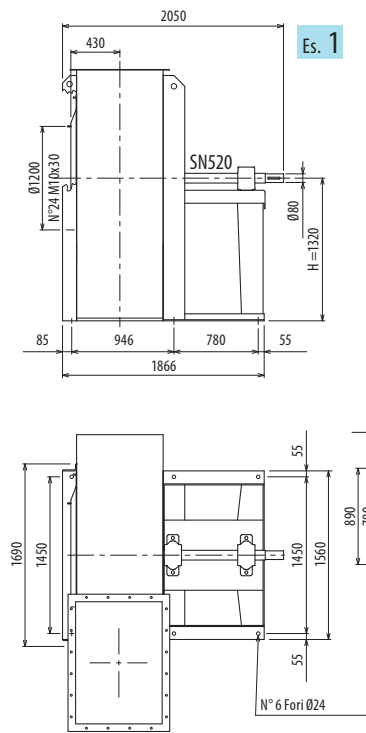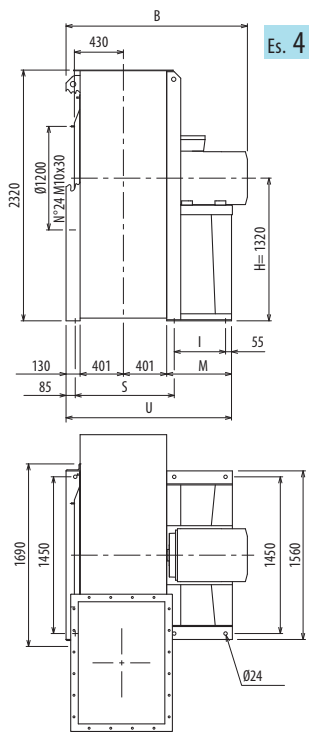


The fan is not revolvable - The weight indicated in the table includes motor


Type		Weight Kg	PD ² Kgf x m ²	B	I	H	H1	H2	H3	H4	M	S	U
Fan	Motor												
PRU1400/4R	315 LB4	2766	280	1963	645	1320	1000	1700	1320	1700	800	946	1731
PRU1400/4	315 S4	2766	380	1963	645	1320	1000	1700	1320	1700	800	946	1731
PRU1400/6R	280 S6	2150	280	1751	535	1320	1000	1700	1320	1700	690	946	1621
PRU1400/6	315 S6	2356	380	1963	645	1320	1000	1700	1320	1700	800	946	1731
PRU1400/T		1740	380			1320	1000	1700	1120	1500			

Further information and sizes

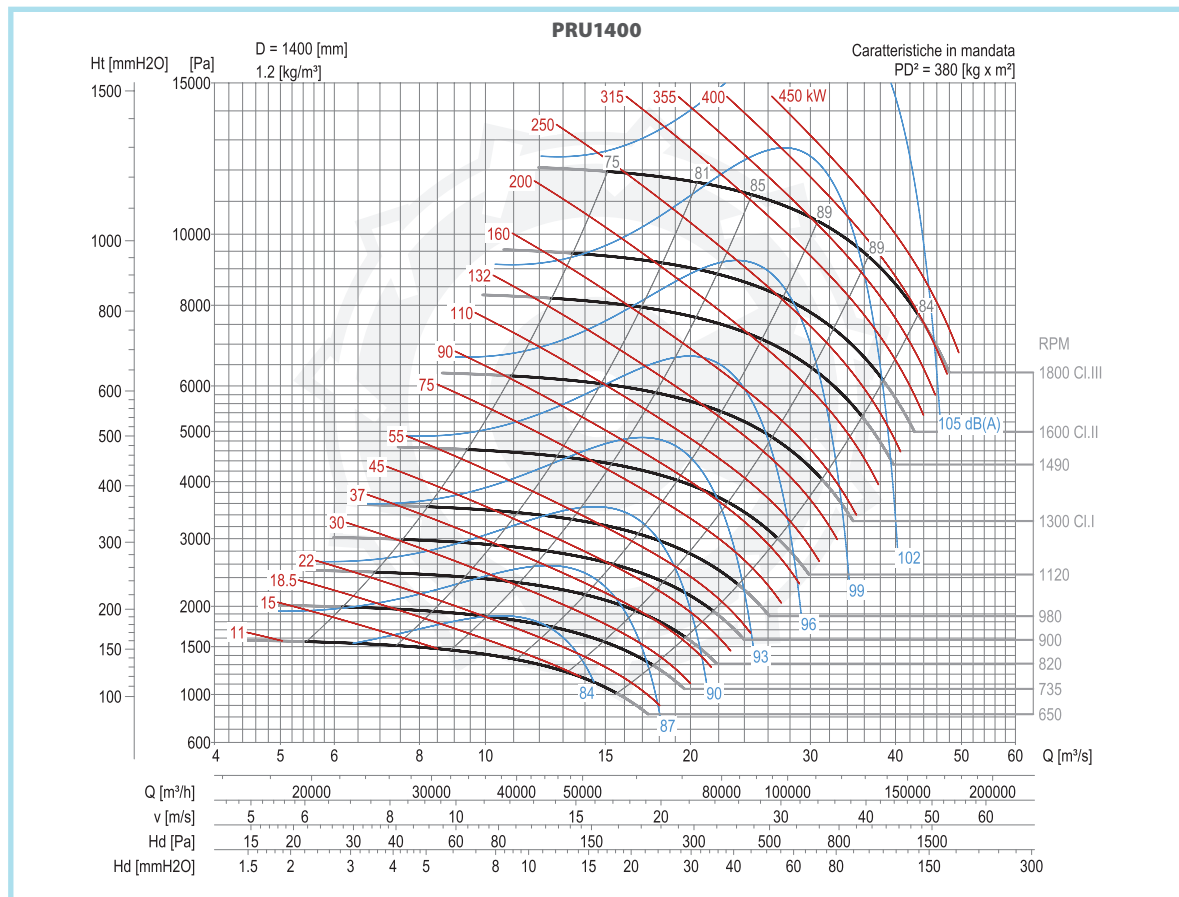

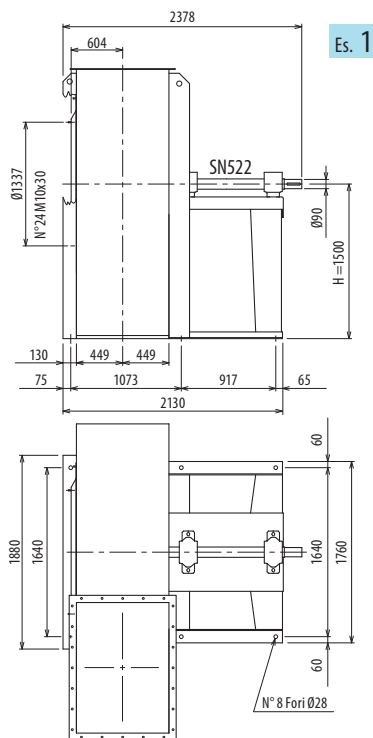




Es. 1


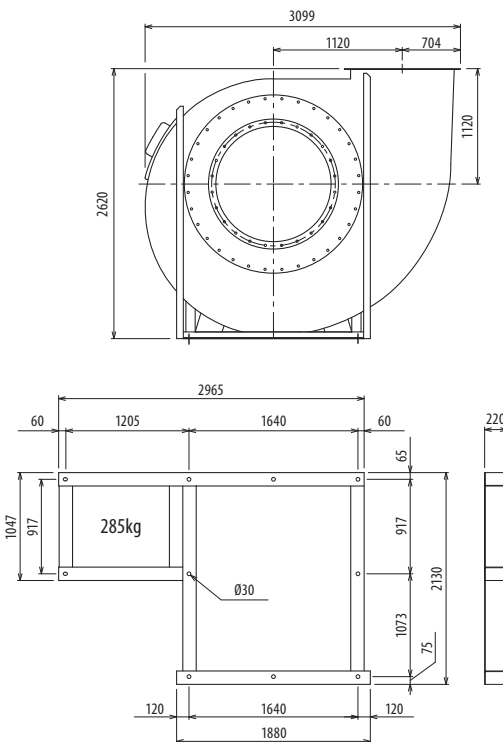


The fan is not revolvable • The weight indicated in the table includes motor

Type		Weight Kg	PD² Kgf x m²	B	I	H	H1	H2	H3	H4					
Fan	Motor														
PRU1600/T		2462	680			1500	1120	1900	1250	1600					

Further information and sizes

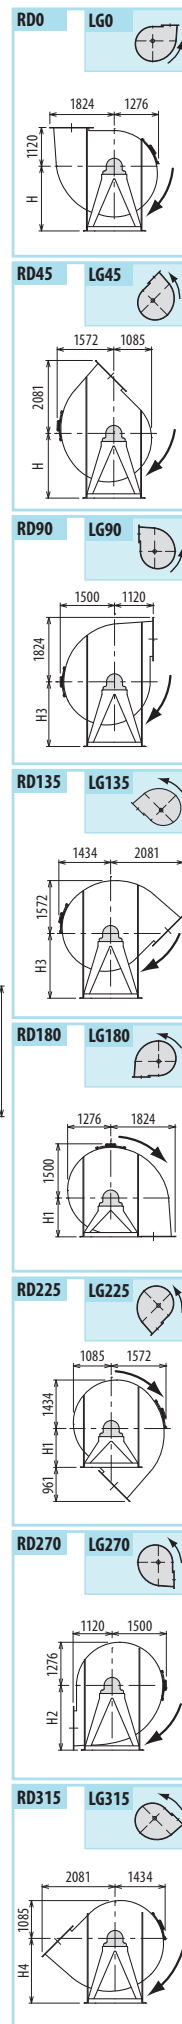
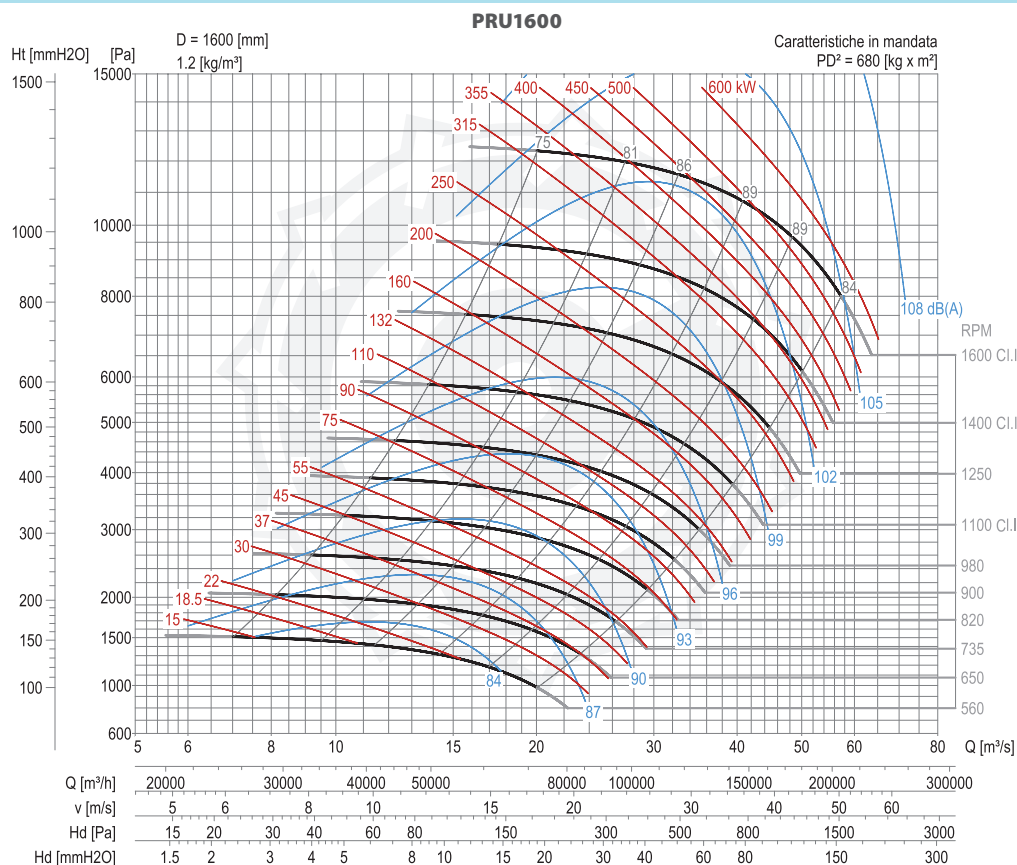



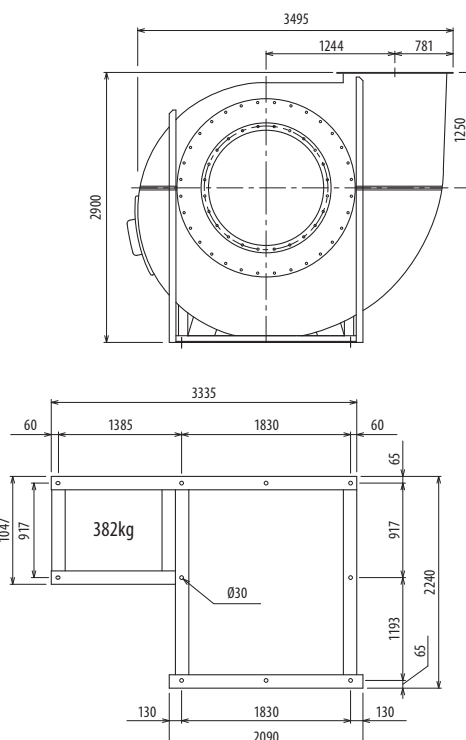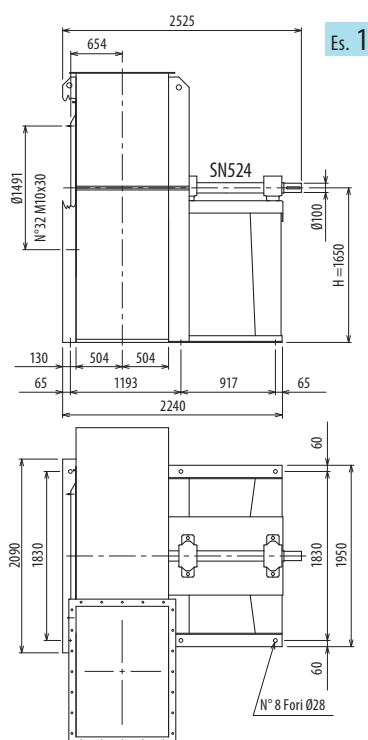


The fan is not revolable


TIPO • Type		PESO	PD ²												
VENTILATORE	MOTORE	Weight	Kgf x m ²	B	I	H	H1	H2	H3	H4	H5	H6			
Fan	Motor	Kg													
PRU1800/T		2790	1130			1650	1250	2120	1570	1400	1320	1800			

Further information and sizes

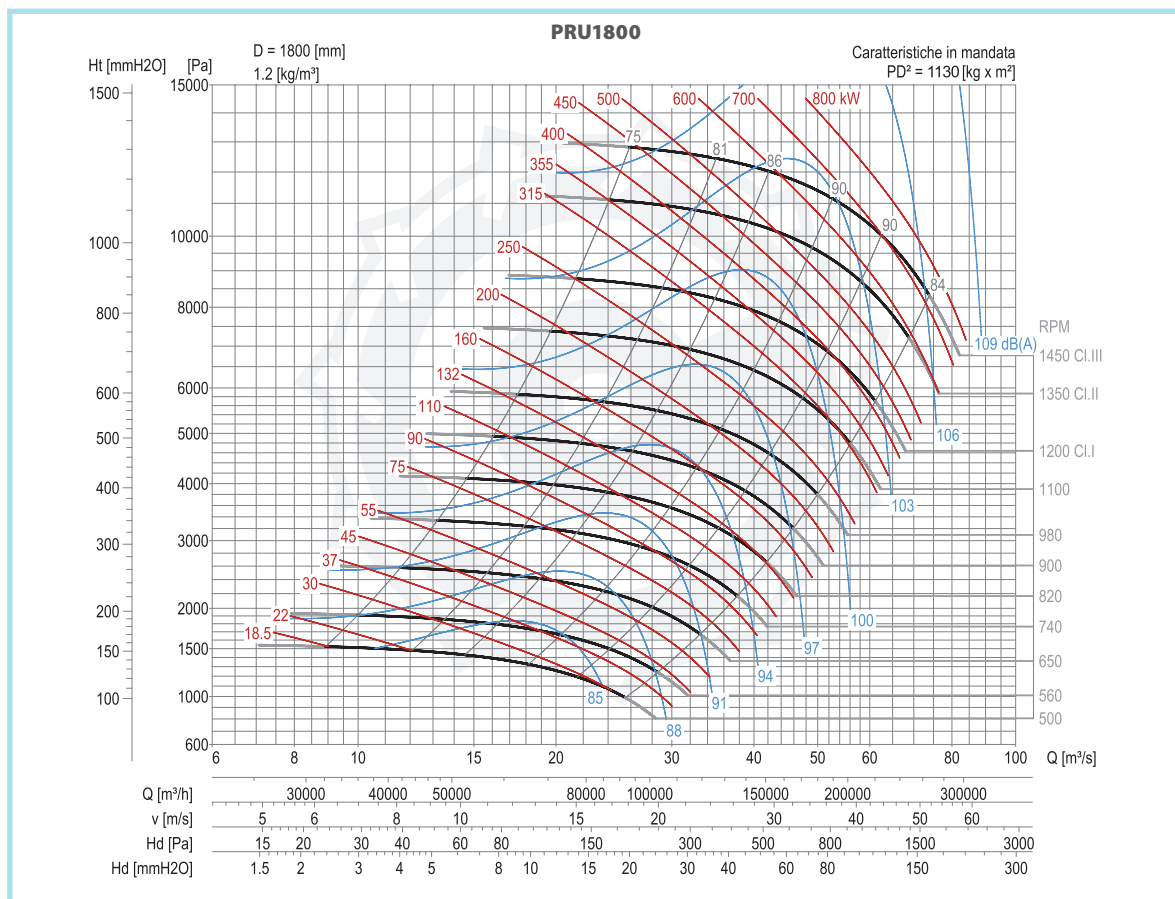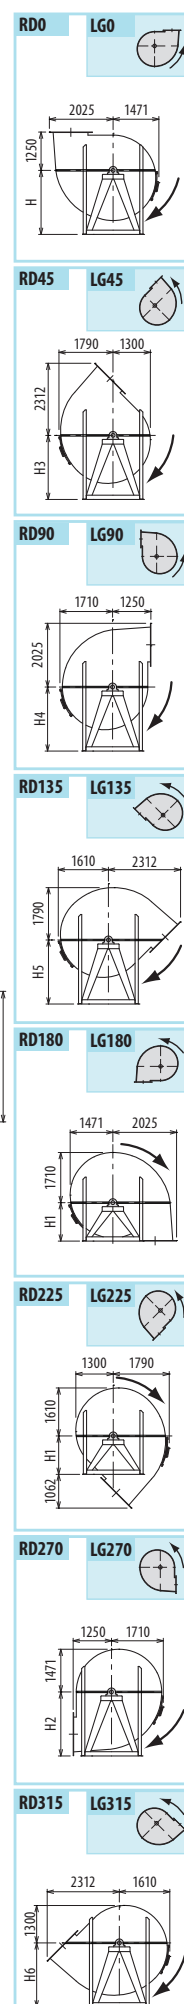

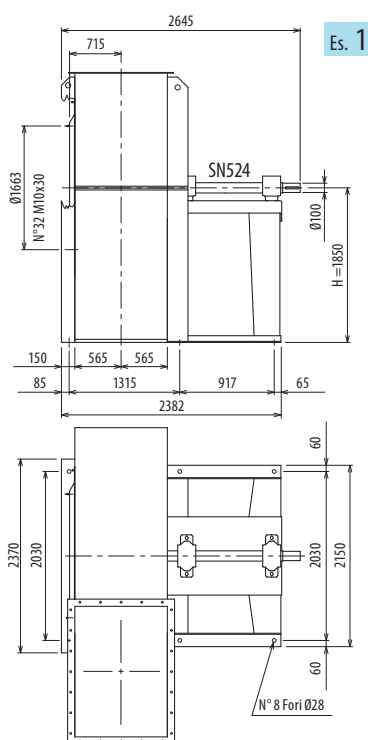

Es. 1

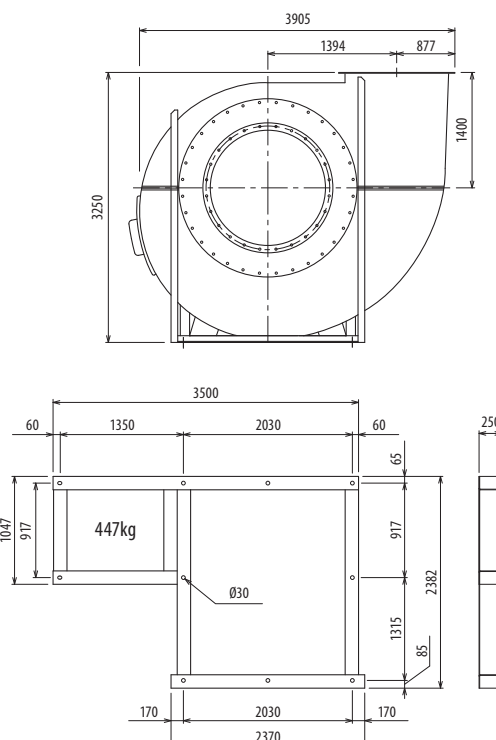

The fan is not revolable

Further information and sizes

TIPO • Type		PESO	PD ²												
VENTILATORE	MOTORE	Weight		B	I	H	H1	H2	H3	H4	H5	H6			
Fan	Motor	Kg	Kgf x m ²												
PRU2000/T		4300	2000			1850	1400	2360	1750	1600	1450	2000			

