

PROBIS



ARTICULATED ARM MOD. PROBIS




APPPLICATIONS: the PROBIS self-supporting articulated arm, made by CORAL represents the best technical solution and has the necessary versatility for extracting fumes emitted by soft soldering, laboratory vapours, electronics in general, small-scale craft work goldsmithery, dental laboratories, research laboratories, analytical laboratories, etc. The CORAL PROBIS/A, arm is available with two articulated joints fitted with fast-tightening screws for correct positioning at the workstation, according to the specific type of use required. The PROBIS arm can be fixed to the ceiling or the workbench.

OPERATING PRINCIPLE: the polluted air is sucked in by one of the seven types of hoods, interchangeable according to the type of use with ideal positioning possibilities as it can rotate 360° about its axis, passes through the anodized aluminium pipe with articulated joints made of a resistant plastic material, to the CORAL suction and filter unit or the centralized suction system.


ACCESORIES: in addition to the various types of hoods available, the circular hood can be fitted with halogen light for a greater and more clearly defined area of visibility CORAL also provide special hoods made of plexiglas for automatic welding so that these operations can be kept under visual control and a damper to set the desired air flow.

Application



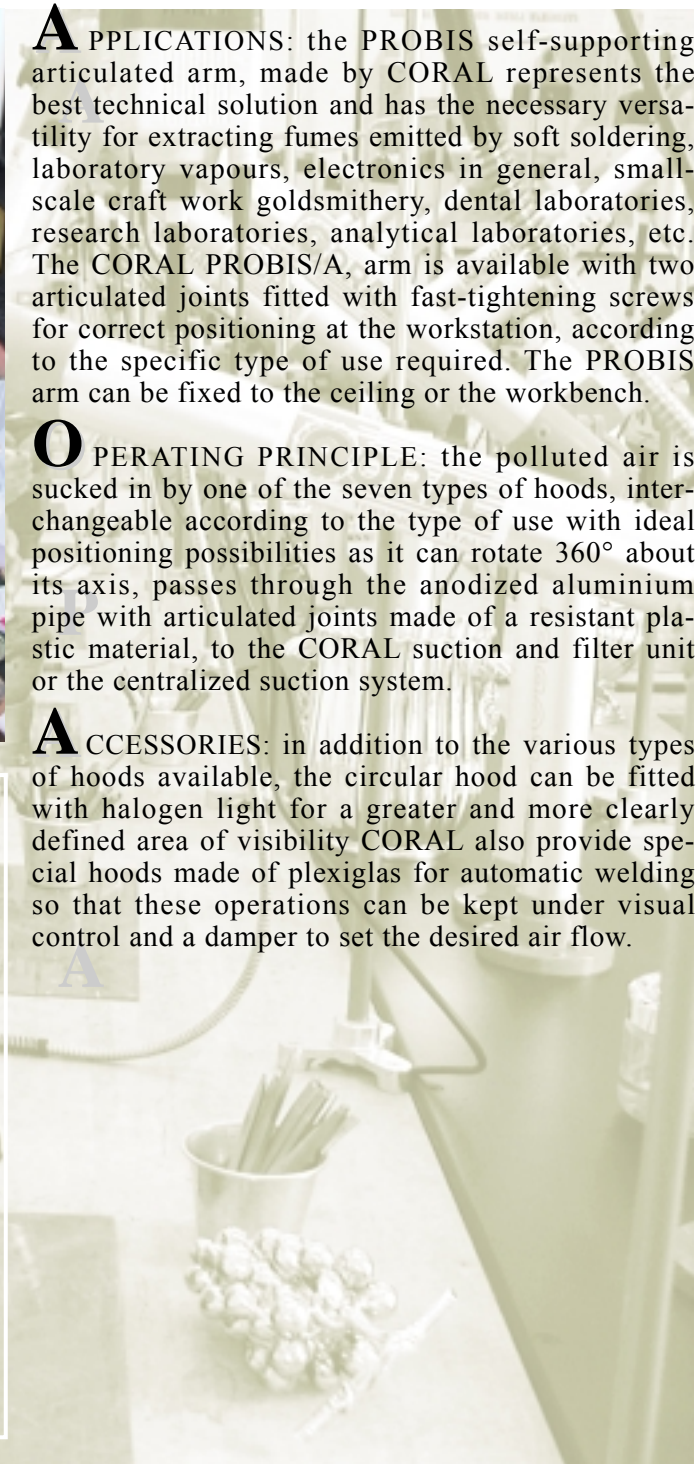


T

E C H N I C A L F E A T U R E S

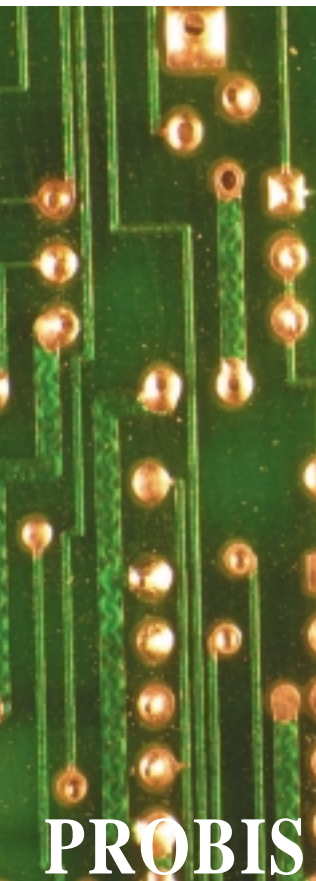

PROBIS

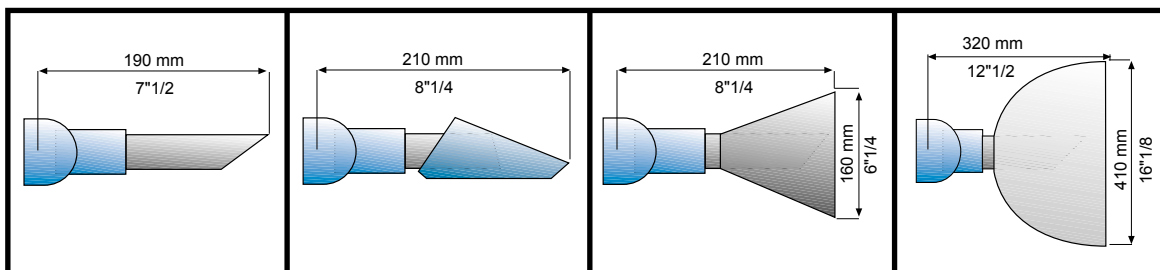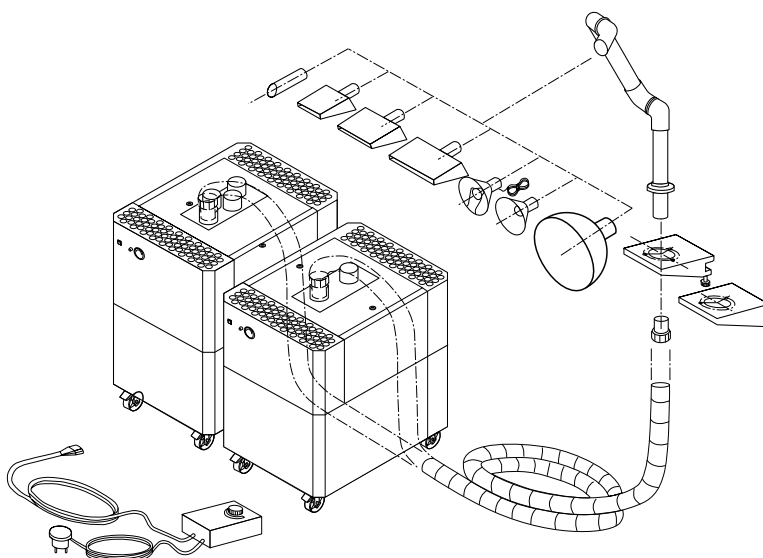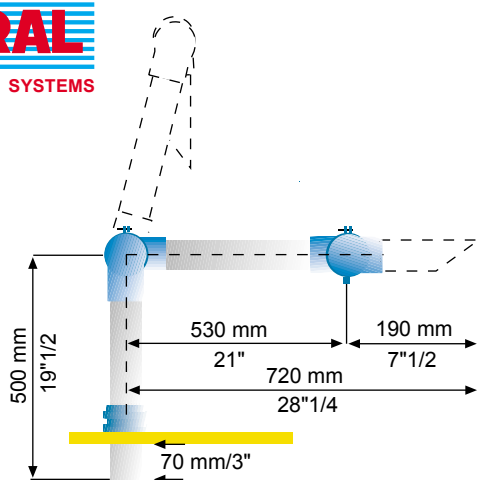

PROBIS/A





The PROBIS/A is the best technical solution for suction of various pollutants.


► *LABORATORIO DI RESTAURO METALLI PREZIOSI (ISTITUTO UNIVERSITARIO SUOR ORSOLA BENINCASA, NAPOLI)*
Application PROBIS/A

PROBIS/C


It is the new version of the PROBIS articulated arm. It maintains always the versatility to grant an easy use and a higher quality.

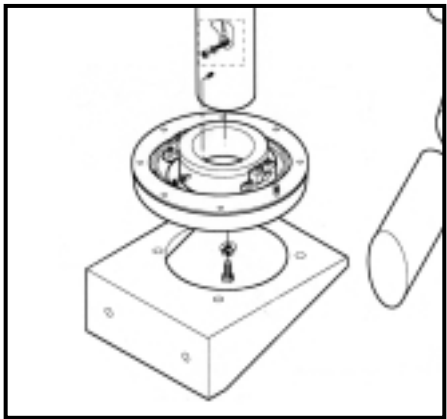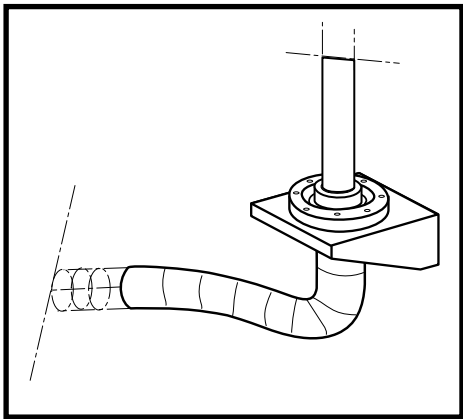

Dimensions (mm)

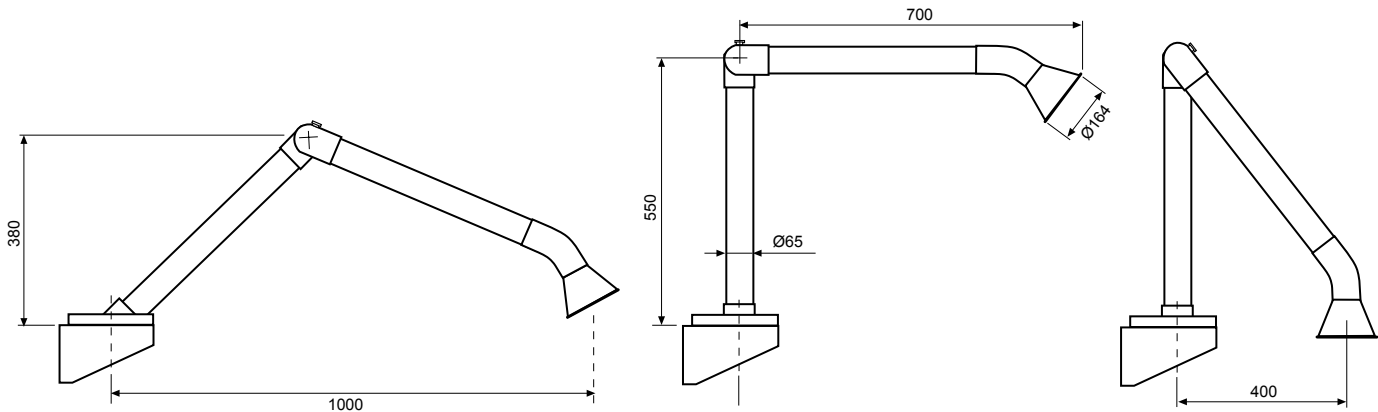

A C C E S S O R I E S

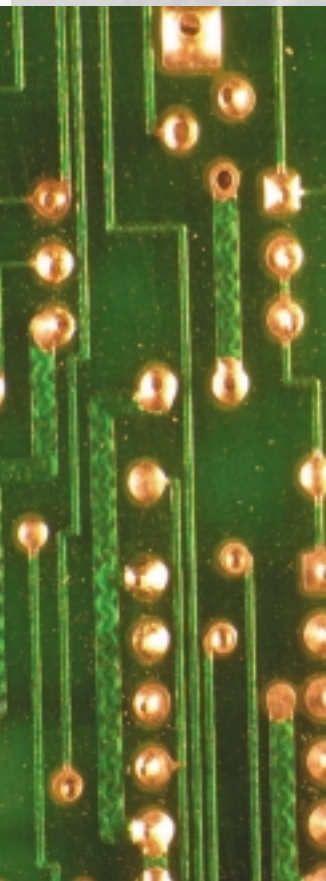


PROBIS/A



Plexiglas circular hood

Plexiglas hood with leak

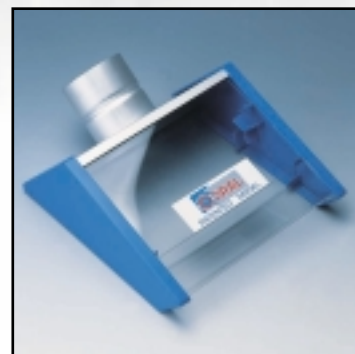



Hood with 100 mm leak


Hood with 150 mm leak

Hood with 250 mm leak





Suction hood type Stilo

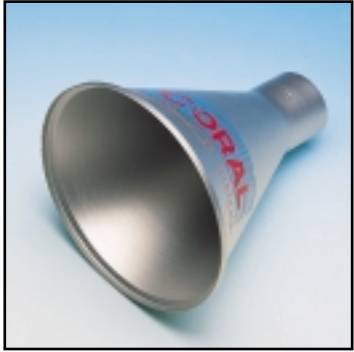






Circular hood



Couplings with flexible hose



Circular hood with halogen light 24V 20W



Transformer with and without light variator





Probis with 2 joints



Air flow setting damper



Table support



Wall support

