



FLEXIBLE HOSE





T-GAS

GB Crush-proof nylon coil black reinforced hose for max. temperature of 180°C. Suitable for fitting on reels and for duct or floor-mounted systems. Strongly recommended for its great flexibility, lightness and resistance.




Model		Ø [mm.]	Length
T-GAS	75/2,5	75	2,5
T-GAS	75/5	75	5
T-GAS	75/7,5	75	7,5
T-GAS	75/10	75	10
T-GAS	75/13	75	13
T-GAS	75/15	75	15
T-GAS	75/20	75	20
T-GAS	75/40	75	40
T-GAS	100/2,5	100	2,5
T-GAS	100/5	100	5
T-GAS	100/7,5	100	7,5
T-GAS	100/10	100	10
T-GAS	100/13	100	13
T-GAS	100/15	100	15
T-GAS	100/20	100	20
T-GAS	100/40	100	40

/Model		Ø [mm.]	Length
T-GAS	125/5	125	5
T-GAS	125/7,5	125	7,5
T-GAS	125/10	125	10
T-GAS	125/13	125	13
T-GAS	125/15	125	15
T-GAS	125/20	125	20
T-GAS	125/40	125	40
T-GAS	150/5	150	5
T-GAS	150/7,5	150	7,5
T-GAS	150/10	150	10
T-GAS	150/13	150	13
T-GAS	150/15	150	15
T-GAS	150/20	150	20
T-GAS	180/10	180	10
T-GAS	180/20	180	20
T-GAS	200/10	200	10
T-GAS	200/20	200	20

PAV

GB Crush-proof hoses for floor-level installation with, maximum working temperature 130°C ÷ 150°C.

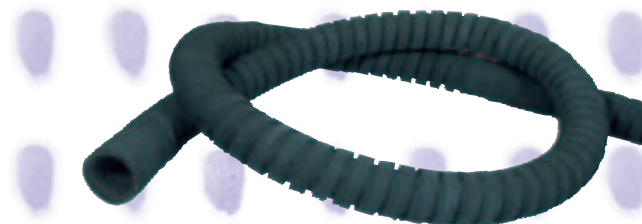

Model		Ø [mm.]	Length
PAV	50/2,5	50	2,5
PAV	50/5	50	5
PAV	50/7,5	50	7,5
PAV	50/10	50	10
PAV	75/2,5	75	2,5
PAV	75/5	75	5
PAV	75/7,5	75	7,5
PAV	75/10	75	10

Model		Ø [mm.]	Length
PAV	100/2,5	100	2,5
PAV	100/5	100	5
PAV	100/7,5	100	7,5
PAV	100/10	100	10
PAV	125/2,5	125	2,5
PAV	125/5	125	5
PAV	125/7,5	125	7,5
PAV	125/10	125	10

T-SPECIAL 4

GB Aluminised glass fabric flexible hose incorporating a high tensile steel helix sewn externally. Colour: silver grey with black scuffstrip. Operating temperature: 400°C. Suitable for fitting on rewinding reels and on stationary systems. Not crush-proof. Delivery: 20 working days after receipt of the order. Max length: 10 meters. For other lengths, please contact our sales office.



Model	Ø [mm.]	Length [m.]
T-SPECIAL 4 100/2,5	100	2,5
T-SPECIAL 4 100/5	100	5
T-SPECIAL 4 100/7,5	100	7,5
T-SPECIAL 4 100/10	100	10
T-SPECIAL 4 125/2,5	125	2,5
T-SPECIAL 4 125/5	125	5
T-SPECIAL 4 125/7,5	125	7,5
T-SPECIAL 4 125/10	125	10
T-SPECIAL 4 150/2,5	150	2,5
T-SPECIAL 4 150/5	150	5

Model	Ø [mm.]	Length [m.]
T-SPECIAL 4 150/7,5	150	7,5
T-SPECIAL 4 150/10	150	10
T-SPECIAL 4 180/2,5	180	2,5
T-SPECIAL 4 180/5	180	5
T-SPECIAL 4 180/7,5	180	7,5
T-SPECIAL 4 180/10	180	10
T-SPECIAL 4 200/2,5	200	2,5
T-SPECIAL 4 200/5	200	5
T-SPECIAL 4 200/7,5	200	7,5
T-SPECIAL 4 200/10	200	10

SNODOFLEX

GB Glass fabric hose coated with PVC strengthened with harmonic steel close coil, covered with PVC. Operating temperature -20°C + 110°C. Max roll length 10 mt.




Model	Ø [mm.]	Length [m.]
SNODOFLEX 60	60	1
SNODOFLEX 80	80	1
SNODOFLEX 100	100	1
SNODOFLEX 120	120	1
SNODOFLEX 150	150	1

Model	Ø [mm.]	Length [m.]
SNODOFLEX 180	180	1
SNODOFLEX 200	200	1
SNODOFLEX 220	220	1
SNODOFLEX 250	250	1



ALLUFLEX

GB Seamed aluminium flexible hose Fire-proof. Max. temp. 300°C. 1 mt long extensible up to 3 mt.

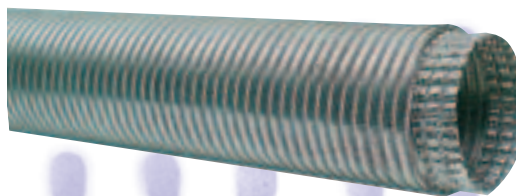


Model	Ø [mm.]
ALLUFLEX 100	100
ALLUFLEX 120	120
ALLUFLEX 150	150

Model	Ø [mm.]
ALLUFLEX 180	180
ALLUFLEX 200	200

ACCESSORIES


GB **WALL BEARINGS** for inactive hoses.

Model	For hose Ø [mm.]
SUP 75	60-75
SUP 100	100-125

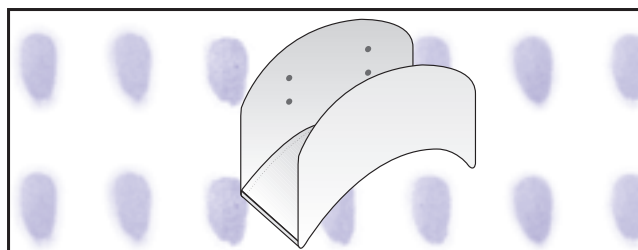

GB **SHEET-METAL** hosepipe coupling.


Model	For hose Ø [mm.]
TE 75	75
TE 100	100
TE 125	125
TE 150	150
TE 180	180
TE 200	200

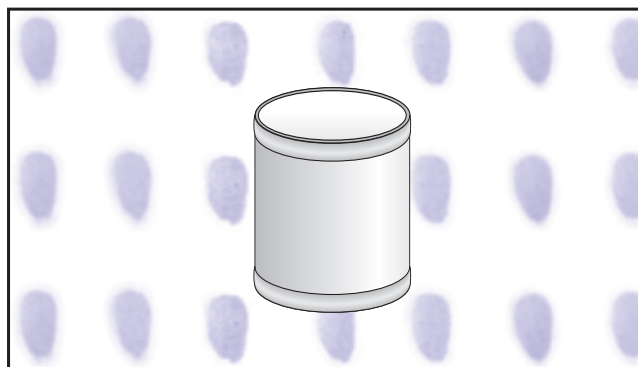

GB **QUICK HOSE COUPLING** zinc-plated for flexible hose.

bayonet-joint

Model	For hose Ø [mm.]
MC/S 75	75
MC/S 100	100
MC/S 125	125
MC/S 150	150
MC/S 200	200

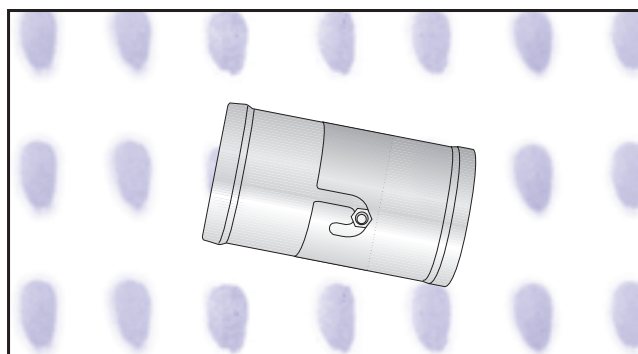

GB **QUICK HOSE COUPLING** for flexible hose.

spring-clutch

Model	For hose Ø [mm.]
JOINT 75	75
JOINT 100	100
JOINT 125	125
JOINT 150	150

