



Zincovelo ZPG - Zincovelo ZSP



ZINCOVELO ZPG

With extended tank, part holding grid, side water veils.

ZINCOVELO ZSP

With a part holding grid at the floor level, supporting structure supplied by CORAL and a concrete tank to be acquired by the customer; available either with or without the side veils.


ZPG/ZSP

ZPG ZSP

2N	7300 - 4294	1	3/2,2	1	1/0,75	3225	2850	2088	2647	2440
3N	10900 - 6412	1	4/3	1	1/0,75	3245	2870	3088	2647	2440
4N	14500 - 8529	1	5,5/4	1	2/1,5	3267	2892	4088	2647	2440
5N	18200 - 10706	2	3/2,2	1	2/1,5	3225	2850	5088	2647	2440
6N	21800 - 12824	2	4/3	2	1/0,75	3245	2870	6088	2647	2440
2H	8400 - 4941	1	3/2,2	1	1/0,75	3525	3150	2088	2647	2740
3H	12500 - 7353	1	5,5/4	1	1/0,75	3567	3192	3088	2647	2740
4H	16700 - 9824	2	3/2,2	1	2/1,5	3525	3150	4088	2647	2740
5H	20800 - 12253	2	4/3	1	2/1,5	3545	3170	5088	2647	2740
6H	25000 - 14706	2	5,5/4	2	1/0,75	3567	3192	6088	2647	2740
	m ³ /h - c.f.m Delivery	n°	Hp/Kw Fan	n°	Hp/Kw Pump	mm Total height	mm	mm Width	mm Depth	mm Working height



WATER VEIL BOOTHS

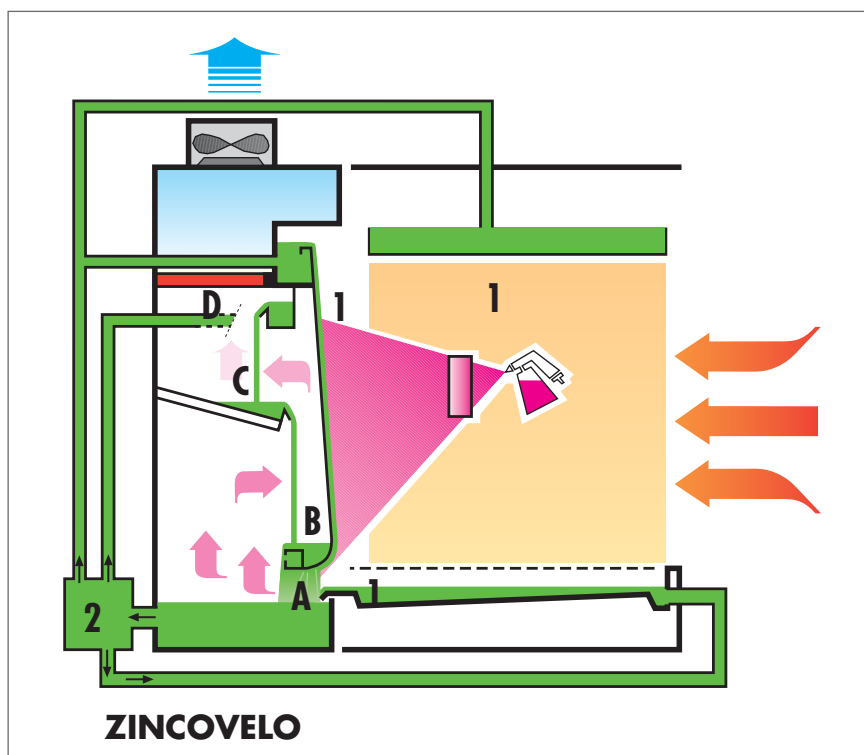

A 1st wash

B 2nd wash

C 3rd wash

D Final dry filtering stage

1 «Over spray» capture"

2 Submersible pump

Fan



Extracted «Over spray»



Washing water



Drop separator



Purified air



Coconut fibre filter



Air inside the room



Equipment & recharges

Zincovelo:



1. Differential manometer - 2. Clean Carbo and Karb active carbon postfilters - 3. Watertight or flameproof (ADPE) lamp - 4. Thermal switch or control panel - 5. ATEX Explosionproof motor - 7. Floor stand or wall holding device for spray gun with automatic fan switch on-off - 9. Plenum and pipe for exhausting the air - 14. Coagulant for paint pigments - 15. Flexible pipe IDROFLEX - 16. Coconut fiber filter - 19. Stainless steel front veils - 20. Waste collecting tank - 21. Electric control board for waste collecting tank.

